


NOTES:

- 1) LABELS ARE M23053/5 ,WHITE. ACCEPTABLE SUBSTITUTION IS DAT-38-292 OR TRANSVINYL (DAT-63-292-2.5).
- 2) TERMINUS ENFACE REQUIREMENTS SHALL MEET GR-326 AND IEC 61300-3-35.
- 3) MAX IL @ 850 nm SHALL BE 0.5 dB PER CONNECTION.

| REVISION HISTORY - ALL SHEETS ARE AT THE SAME REVISION | | | |
|--|-----------------|------------|----------|
| REV | DESCRIPTION | DATE | APPROVED |
| - | INITIAL RELEASE | 2017/11/03 | |

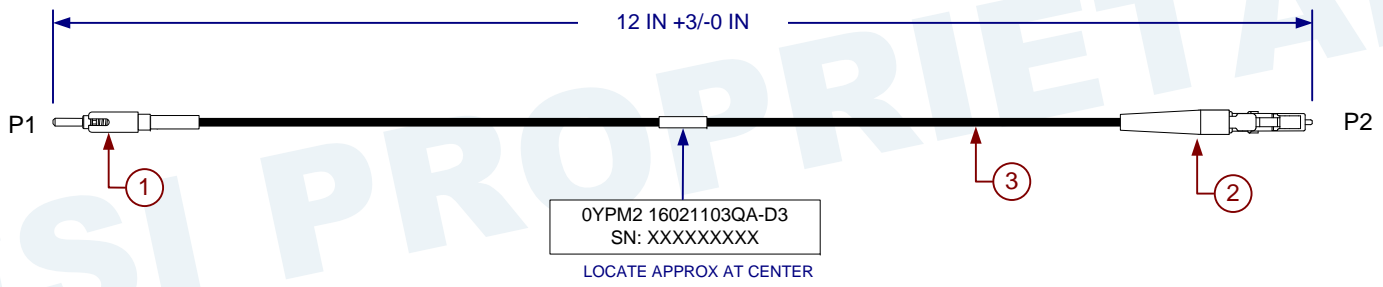

| 4 | AFSI-PRE T BOX | BOX, SMALL FIBER CABLE 10X10X2 W/AFSI GRAPHICS | 1 |
|----------|----------------|--|-------------|
| 3 | C24712 | FLIGHT LINK 50/125 OM3 SIMPLEX | 1.25 FEET |
| 2 | 961-251-2C1 | SIMPLEX LC, MM, BEIGE HOUSING, 2MM MINI BOOT | 1 |
| 1 | M801-MS1N | ARINC 801 TERMINI, MM127, NON-PULL PROOF | 1 |
| ITEM NO. | PART NO. | DESCRIPTION | QTY/ LENGTH |

| | | | |
|-------------|---------|---|--|
| MATERIAL: | | DFTR/Designer: C. Hoang 2017/10/20 | Amphenol FSI |
| | | Check By: B. Waite 2017/10/24 | |
| | | Manufacturing: B. Waite 2017/10/24 | |
| | | Market Manager/PLM: Q. Abraham 2017/10/27 | |
| | | Configuration Management: L. Brown 2017/11/03 | TITLE: ARINC 801 TERMINI TO LC ASSEMBLY, MM |
| NEXT ASSY | USED ON | DO NOT SCALE DRAWING UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOL ON ANGLES ±3° 1 PL ±.1 2 PL ±.02 3 PL ±.010 INTERPRET DIM AND TOL PER ASME 14.5M-1994 | SIZE A |
| APPLICATION | | This Document contains proprietary information and such information is prohibited from disclosure to others, publication or duplication in whole or in part without written permission from Amphenol Fiber Systems International. Copyright © 2017 Amphenol Fiber Systems International. Non published work. All rights reserved. | CAGE CODE OYPM2 |
| | | | DWG NO 16021103QA-D3 |
| | | | REV - |
| | | | SCALE: NONE |
| | | | SHEET 1 OF 1 |