


# High Frequency Planar Transformers

PA09XXNL Series (up to 250W)

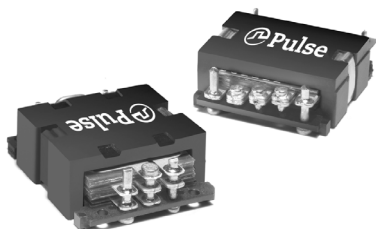

- ⚡ **Power Rating:** up to 250W
- ⚡ **Height:** 9.1mm to 10.4mm Max
- ⚡ **Footprint:** 29.5mm x 26.7mm Max
- ⚡ **Frequency Range:** 200kHz to 700kHz
- ⚡ **Isolation (Primary to Secondary):** 1750V<sub>DC</sub>

## Electrical Specifications @ 25°C - Operating Temperature -40°C to +125°C

Part Number	Turns Ratio		Schematic	Primary <sup>1</sup> Inductance (μH MIN)	Leakage <sup>2</sup> Inductance (μH MAX)	DCR (mΩ MAX)				Maximum Height (mm)
	Primary A	Secondary				Primary A	Primary B	Primary Aux.	Secondary	
<b>Double Interleave Designs (Higher Efficiency, Lower DCR and Lower Leakage)</b>										
PA0901NL	4T & 4T	4T (1T:1T:1T:1T)	A1	216	0.3	13	13	-	4.5	10.2
PA0903NL	5T & 5T (w/5T aux)			340	0.3	15	15	235		
PA0905NL	6T & 6T (w/2T aux)			480	0.3	21	21	78		
PA0907NL	7T & 7T (w/3T aux)			660	0.3	50	50	100		
PA0909NL	8T & 8T			860	0.3	60	60	-		
PA0908NL	4T & 4T	1T & 1T	A2	216	0.3	13	13	-	0.56 & 0.56	10.2
PA0910NL	5T & 5T (w/5T aux)			340	0.3	15	15	235		
PA0912NL	6T & 6T (w/2T aux)			480	0.3	21	21	78		
PA0914NL	7T & 7T (w/3T aux)			660	0.3	50	50	100		
<b>Single Interleave Designs (Lower Cost)</b>										
PA0930NL	4T	4T (1T:1T:1T:1T)	B1	54	0.3	13	-	-		
PA0931NL	5T (w/5T aux)			85	0.3	15	-	470		
PA0934NL	4T	7T & 7T	B2	54	0.3	13	-	-	40 & 40	9.1
PA0935NL	5T (w/5T aux)			85	0.3	15	-	470		
PA0936NL	6T (w/2T aux)			120	0.3	21	-	156		
PA0937NL	7T (w/3T aux)			165	0.3	50	-	200		
PA0947NL	8T			215	0.3	60	-	-		
PA0943NL	5T (w/5T aux)	2T & 1T	B3	85	0.3	15	-	470	1.8 & 0.6	9.1

### Notes:

- Inductance is measured, where applicable, with both primary windings connected in series (2 to 5, with 3 and 4 shorted).
- Leakage inductance is measured with both primary windings connected in series (where applicable) with all other windings shorted.


# High Frequency Planar Transformers

PA09XXNL Series (up to 250W)



## Mechanical

PA090X

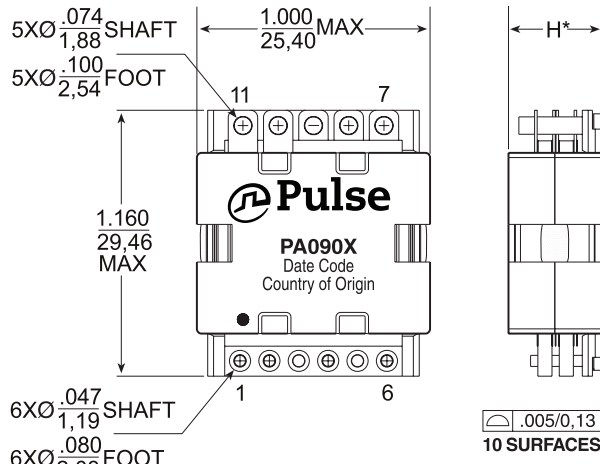


\*H - Maximum Height  
(see table above)

Weight .....19.8grams

Tray .....30/tray

Dimensions:  $\frac{\text{inches}}{\text{mm}}$   
Unless otherwise specified,  
all tolerances are:  $\pm \frac{0,010}{0,25}$

## SUGGESTED PAD LAYOUT

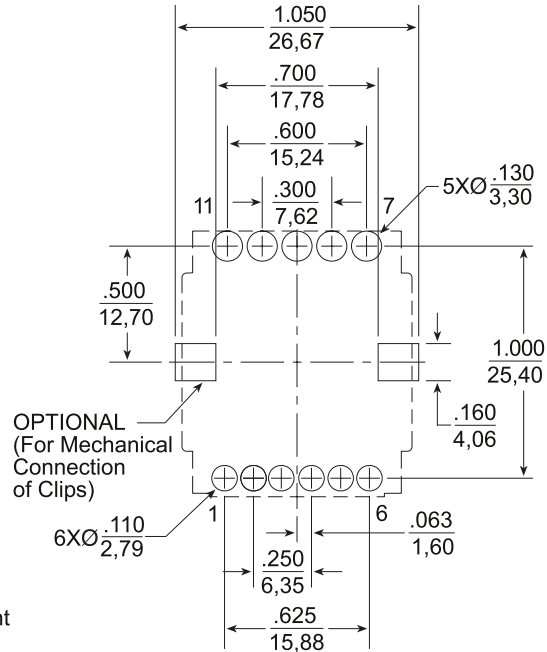


NOTES: The above is a universal footprint for a component that has all 11 pins populated. For a given part number, it is only necessary to provide pads for the terminations shown in the schematic below.


## Schematics

PA090X

### — DOUBLE INTERLEAVE SCHEMATICS —

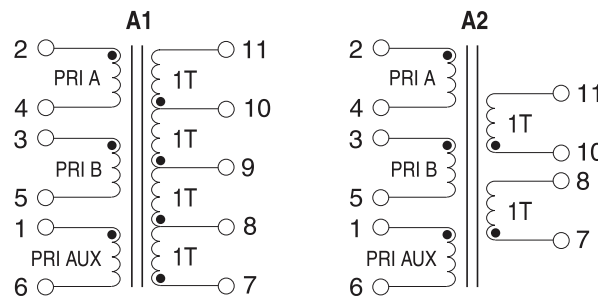

### — SINGLE INTERLEAVE SCHEMATICS —

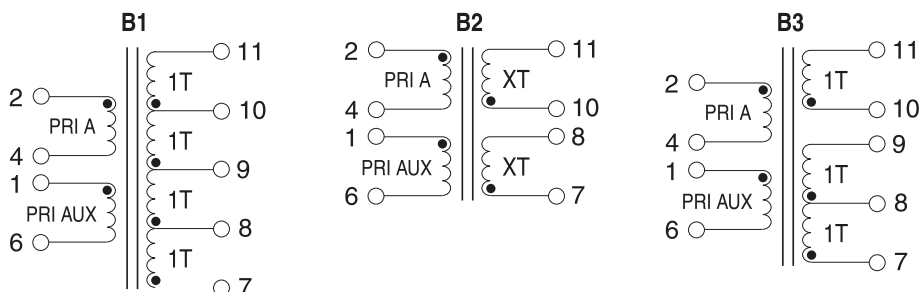

# High Frequency Planar Transformers

PA09XXNL Series (up to 250W)



## PA09XX Transformer Winding Configuration Matrix

The following is a matrix of the winding configurations that are possible with the Pulse PA09XX Planar Transformer Platform. The package is typically capable of handling between 150-250W of power depending on the application, ambient conditions and

available cooling. Once a configuration is selected, the formulae and charts can be used to determine the approximate power dissipation and temperature rise of the component in a given application.

High Efficiency Double Interleaved Designs										
		SECONDARY WINDINGS								
		Turns	Single Winding			Tapped Winding			Dual Winding	
			DCR (mΩ)	1T	2T	4T	1:1	1:3	2:2	1T & 1T
PRIMARY WINDINGS	Single Winding	4T	5	PA0908	PA0908	PA0901	PA0908	PA0901	PA0901	PA0908
		5T	7.5	PA0910	PA0910	PA0903	PA0910	PA0903	PA0903	PA0910
		6T	12	PA0912	PA0912	PA0905	PA0912	PA0905	PA0905	PA0912
		7T	30	PA0914	PA0914	PA0907	PA0914	PA0907	PA0907	PA0914
		8T	20	PA0908	PA0908	PA0901	PA0908	PA0901	PA0901	PA0908
		10T	30	PA0910	PA0910	PA0903	PA0910	PA0903	PA0903	PA0910
		12T	48	PA0912	PA0912	PA0905	PA0912	PA0905	PA0905	PA0912
		14T	120	PA0914	PA0914	PA0907	PA0914	PA0907	PA0907	PA0914
		16T	140	PA0916	PA0916	PA0909	PA0916	PA0909	PA0909	PA0916
	Dual Winding	4T/4T	20	PA0908	PA0908	PA0901	PA0908	PA0901	PA0901	PA0908
		4T/5T	30	PA0910	PA0910	PA0903	PA0910	PA0903	PA0903	PA0910
		5T/5T	48	PA0912	PA0912	PA0905	PA0912	PA0905	PA0905	PA0912
		5T/6T	120	PA0914	PA0914	PA0907	PA0914	PA0907	PA0907	PA0914
		6T/6T	140	-	-	PA0909	-	PA0909	PA0909	-

Lower Cost Single Interleaved Designs												
		SECONDARY WINDINGS										
		Turns	Single Winding			Tapped Winding				Dual Winding		
			DCR (mΩ)	3T	4T	7T	1:2	1:3	2:2	7:7	1T & 2T	7T & 7T
PRIMARY WINDINGS	Single Winding	4T	10	-	PA0930	PA0934	-	PA0930	PA0930	PA0934	-	PA0934
		5T	15	PA0943	PA0931	PA0935	PA0943	PA0931	PA0931	PA0935	PA0943	PA0935
		6T	24	-	-	PA0936	-	-	-	PA0936	-	PA0936
		7T	60	-	-	PA0937	-	-	-	PA0937	-	PA0937
		8T	70	-	-	PA0947	-	-	-	PA0947	PA0947	PA0947

**Notes:**

- The primary inductance for any configuration can be calculated as:  

$$\text{Primary Inductance } (\mu\text{H MIN}) = 3.4 * (\text{Primary\_Turns})^2$$
- The above base part numbers (**PA09XXNL**) are available from stock.
- It is possible to add a small gap to the transformer. Gapped transformers are non-standard and can be made available upon request, but are not typically available

from stock. To request a gapped version of the transformer, add a suffix "G" to the base number (i.e. PA0901GNL). The nominal inductance with the a gap can be calculated as:

$$\text{Primary Inductance } (\mu\text{H nominal}) = 2.2 * (\text{Primary Turns})$$

# High Frequency Planar Transformers


PA09XXNL Series (up to 250W)




## Notes from Tables:

1. The above transformers have been tested and approved by Pulse's IC partners and are cited in the appropriate datasheet or evaluation board documentation at these companies. To determine which IC and IC companies are matched with the above transformers, please refer to the IC cross reference on the Pulse web page.
2. To determine if the transformer is suitable for your application, it is necessary to ensure that the temperature rise of the component (ambient plus temperature rise) does not exceed its operating temperature. To determine the approximate temperature rise of the transformer, refer to the graphs below.

### Core Loss vs. Flux Density

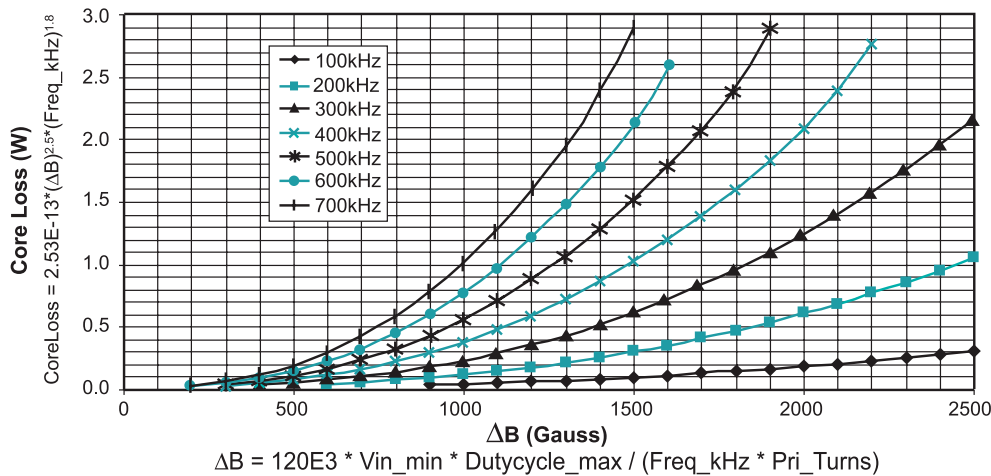

### Temperature Rise vs. Power (W) Dissipation

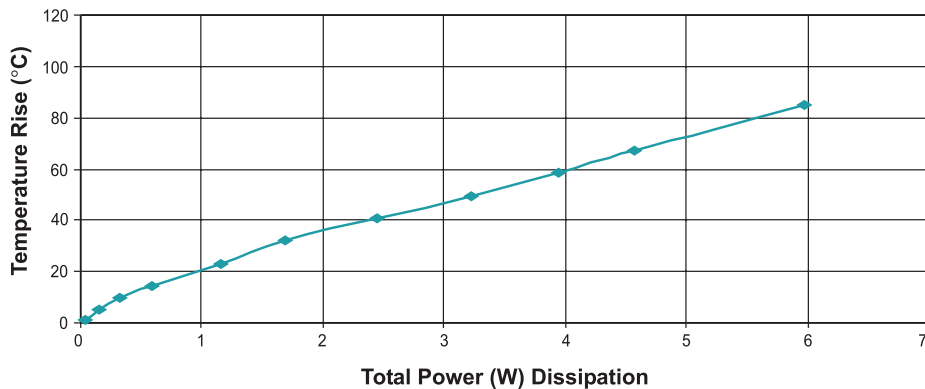

Total Power Dissipation (W) =  $.001 * (DCR_{primary} * I_{RMS\_primary}^2 + DCR_{secondary} * I_{RMS\_secondary}^2) + Core\ Loss\ (W)$

## For More Information

### Pulse Worldwide Headquarters

15255 Innovation Drive Ste 100  
San Diego, CA 92128  
U.S.A.

### Pulse Europe

Pulse Electronics GmbH  
Am Rottland 12  
58540 Meinerzhagen  
Germany

### Pulse China Headquarters

Pulse Electronics (ShenZhen) CO., LTD  
D708, Shenzhen Academy of  
Aerospace Technology,  
The 10th Keji South Road,  
Nanshan District, Shenzhen,  
P.R. China 518057

### Pulse North China

Room 2704/2705  
Super Ocean Finance Ctr.  
2067 Yan An Road West  
Shanghai 200336  
China

### Pulse South Asia

3 Fraser Street 0428  
DUO Tower  
Singapore 189352

### Pulse North Asia

1F., No.111 Xiyuan Road  
Zhongli District  
Taoyuan City 32057  
Taiwan (R.O.C)

Tel: 858 674 8100  
Fax: 858 674 8262

Tel: 49 2354 777 100  
Fax: 49 2354 777 168

Tel: 86 755 33966678  
Fax: 86 755 33966700

Tel: 86 21 62787060  
Fax: 86 2162786973

Tel: 65 6287 8998  
Fax: 65 6280 0080

Tel: 886 3 4356768  
Fax: 886 3 4356820

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2019, Pulse Electronics, Inc. All rights reserved.