

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-. - .

REVISIONS


© COPYRIGHT - TE Connectivity Ltd.

ALL RIGHTS RESERVED.

P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	ECR-06-006914	21-03-06	-	-
	B1	ECR-08-014299	13-03-09	AEG	WRV
	B2	OBSOLETE PN 2-160974-1	22MAR2018	SH	NG

NOTE:

- 1 RANGE: $\varnothing 45$ MAX.
- 2 MIN. TENSILE STRENGTH 220N.

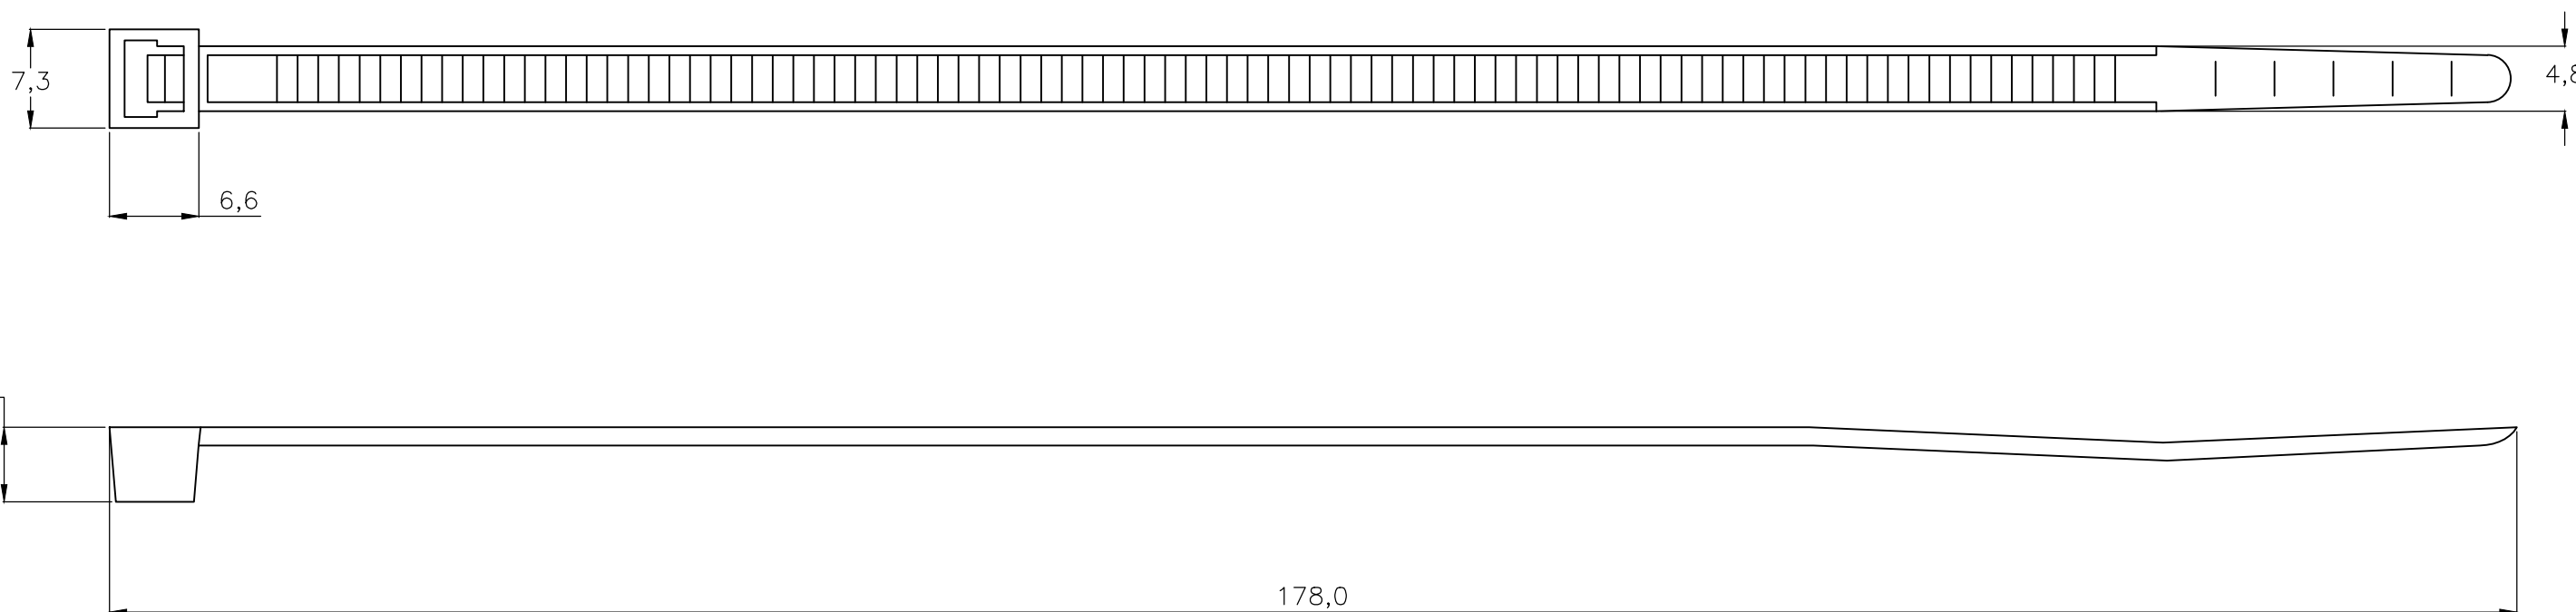

	1000	BLACK	POLYAMIDE 6.6	4-160974-2
	1000	NATURAL	POLYAMIDE 6.6	4-160974-1
OBSOLETE	100	BLACK	POLYAMIDE 6.6	2-160974-2
OBSOLETE	100	NATURAL	POLYAMIDE 6.6	2-160974-1
	QTY	FINISH	MATERIAL	PARTNUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.V.D.HEIJDEN 27FEB92	STE TE Connectivity		
DIMENSIONS: mm		CHK R.VOS			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD L.V.SOEST	CABLE TIE		
0 PLC ± -		PRODUCT SPEC	-		
1 PLC ± -		APPLICATION SPEC	-		
2 PLC ± -		WEIGHT	SIZE A3	CAGE CODE 00779	DRAWING NO C-160974
3 PLC ± -			RESTRICTED TO		-
4 PLC ± -			SCALE NTS		
ANGLES ± -			SHEET 1 OF 1		REV B2
MATERIAL -		FINISH -	CUSTOMER DRAWING		