


Notes:

1. Only RoHS Compliant Processes and Materials used for this assembly.
2. Marking to Contain "ConductRF", Date Code & Part No., Black Text.
3. Single Centered Marker on Cables of 4" and longer
4. Sweep Tested & Store Hi-Point Data to Ref Frequency

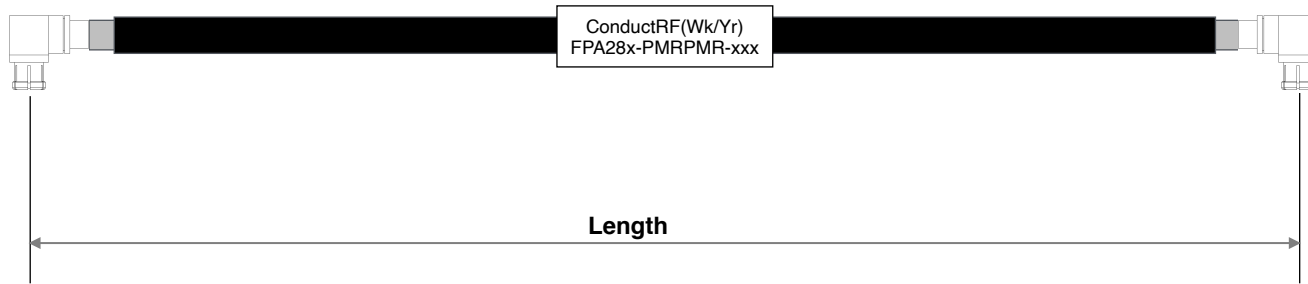

		Insertion Loss Max(dB) - Typ.		
XXX	L(in.)	12GHz	18GHz	27GHz
Part No. Ref>>>		FPA28E	FPA28D	FPA28C
S04	4"	0.53	0.66	0.82
S06	6"	0.66	0.83	1.04
S08	8"	0.80	1.00	1.25
S09	9"	0.87	1.09	1.36
S12	12"	1.07	1.34	1.69
S16	16"	1.35	1.69	2.13
S24	24"	1.89	2.38	3.00
VSWR Typ.		1.50:1		1.60:1

Part No. Configurator - XXX

FXX = Length in Feet (eg F03=3ft)
 SXX = Length in Inches (eg S18=18")
 XMX = Length in Meters (eg 2M5=2.5m)
 CXX = Length in CM (eg C50=50cm)

4	Shrink Tube	Marker	White
3	Semi-Flex Cable	A28RFJ	Black FEP
2	SMPM R/A Female	PMF21B-A28G01	Gold
1	SMPM R/A Female	PMF21B-A28G01	Gold
ITEM	DESCRIPTION	MATERIALS	FINISH

REV.	DESCRIPTION	ECN	DRAWN	DATE	Customer DWG	Title: Low Loss 0.086" SMPM Female R/A Jumper				
2	Revised max freq. to 27GHz		DG	11/11/20	Remarks:	Originated: 06/28/18	Conduct RF sales@ConductRF.com Tel: +1 978 374 6840	Range: FPA		Sheet 1 of 1
1	Pre-Release		DG	06/28/18		Dwg Ref: FPA28-PMRPMR				
					Length Tolerances: ≤24" = ±0.25" >24" = ± 1%	Checked: JW	Approved: PL	Rev: 2		Part No: FPA28x-PMRPMR-xxx
REVISION HISTORY										