



Å	

ISSUE NUMBER	
ORIGINAL	(1)





NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, 30µ" GOLD PLATED

**OPERATING TEMPERATURE:** 

.XX

±0.13 .XXX ±0.05


POWER/CO-AX CONTACT RATING: 30A (CURRENT) (IF PRESENT) SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE:  $10m\Omega$  MAX.


**INSULATOR RESISTANCE:** DIELECTRIC WITHSTANDING VOLTAGE:

5000MΩ min.

1000V AC rms

-55°C ~ 125°C

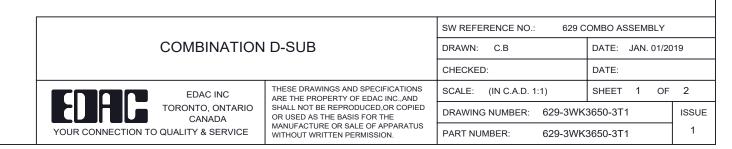



COMPLIANT

