

Ŧ	G G	н п	m	D	O



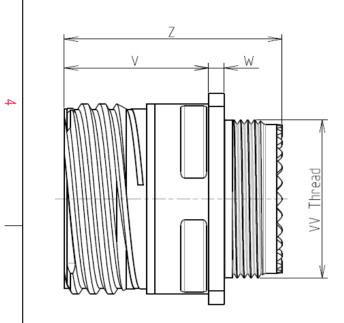

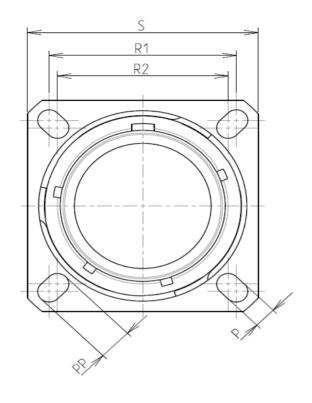

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 17

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium		
-Shell Plating	: Olive drab Cadmium		
-Insulator	: Thermoplastic		
-Contacts	: Copper Alloy		
-Seals & Grommet	: Silicon Elastomer		
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum		
-Durability	: 500 Mating cycles		
-Delivered with Souriau contacts and Accessories			
-Temperature Range	65℃ to +175℃		
-Salt Spray	: 500 hours		

: 28.21 g ± 10%

8D 0

G

17

W

06

Ρ


F

Е

Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
PP	4.93±0.2			
R1	26.97			
R2	24.61			
S	33.3±0.3			
V	20.83+0/-1.25			
W	2.1/2.5			
Z	31.5 Max			
VV THREAD	M25x1-6g			

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

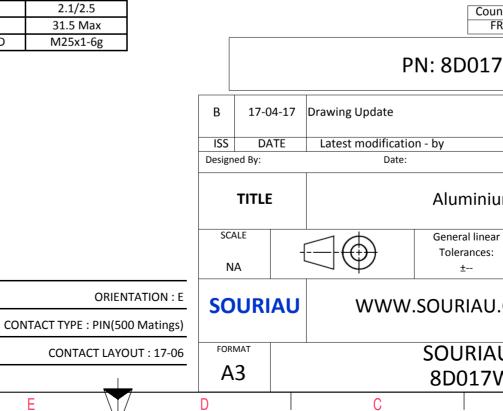

	ω		A					
					4			
AS EXAMP	EXAMPLE							
s which do er of the F	iny non-conformity or damage which does not comply with of the Parties or by a third party ation, technical notice.)							
Intry R	/ Jurisdiction & Control List Not Listed							
7W06	N06PE							
				MOD N°				
		CUSTOM	ER DRAWING					
um Re	n Receptacle 8D series							
ar		NPRDS	5 / PROJECT 859		1			
.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission								
				SHEET				
W06I	B		A	1/2	J			

