



④ WIRE LIST

PAIR	COLOR	P1
	RED	1
	WHITE	2
	GREEN	3
	BLACK	4
OPEN		SHELL

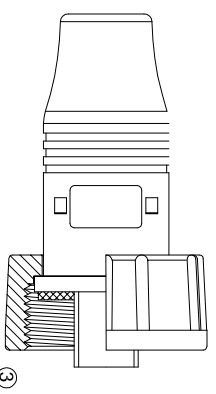

- ④ TESTING CONDITIONS:
1. VOLTAGE: 300V DC/0.01S.
 2. INSULATION RESISTANCE: 10 Mohms min.
 3. CONDUCTIVE RESISTANCE: 5 Ohms max.
 4. 100% OPEN AND SHORT ELECTRICAL TEST.

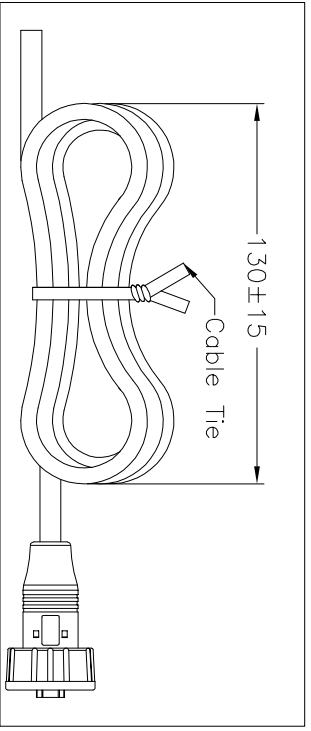

④ ITEM SPECIFICATION

ITEM	DESCRIPTION	Q'TY	UNIT
⑤	BLACK PVC 20P	6	9
④	BLACK PVC 30P	10	9
③	Gasket, EDPM Black	1	PCS
②	USB B/M CONNERTOR SOLDER ABS 94V-0. BLACK	1	PCS
①	USB 2.0 28AWG*1P+24AWG*2C+AL.MY+D+B JACKET BALCK PVC OD=5.0mm (UV RESISTANT)	1	PCS

RoHS compliant
Unit: mm

Scale	Free	Customer-No.	
TOLERANCE		Drawn	Date
X.X	±0.50	Approved	16.03.2018
X.XX	±0.20		
DIM TOL			
X.°	±2°		
X.X°	±1°		
Angle	TOL		

Customer-No.	ASSMANN WSW-No.	ASSMANN WSW-No.	Drawing-No.	Replace
		A-KAB-USB-B-MS-1M	ASS 2384 CA	rev04
				Sheet



1	2	3	4	5	6	7
1	2	3	4	5	6	7
H	G	F	E	D	C	B