3RV2411-1JA10-0BA0

Data sheet



Special type Circuit breaker size S00 for transformer protection A-release 7...10 A N-release 208 A screw terminal Standard switching capacity Ambient temperature -50 °C 500 switching cycles

product designation C	Circuit breaker	
design of the product	or transformer protection	
product type designation 3	RV2	
General technical data		
size of the circuit-breaker S	500	
size of contactor can be combined company-specific S	S00, S0	
product extension auxiliary switch	'es	
power loss [W] for rated value of the current		
• at AC in hot operating state 9.	.25 W	
• at AC in hot operating state per pole 3.	3.1 W	
insulation voltage with degree of pollution 3 at AC rated value	90 V	
surge voltage resistance rated value 6	kV	
shock resistance according to IEC 60068-2-27	5g / 11 ms	
mechanical service life (switching cycles)		
• of the main contacts typical 50	00	
• of auxiliary contacts typical 50	00	
electrical endurance (switching cycles) typical 50	00	
reference code according to IEC 81346-2		
Substance Prohibitance (Date)	0/01/2009	
Ambient conditions		
installation altitude at height above sea level maximum 2	000 m	
ambient temperature		
• during operation -5	50 +60 °C	
• during storage -5	50 +80 °C	
• during transport -5	50 +80 °C	
relative humidity during operation 10	0 95 %	
Main circuit		
number of poles for main current circuit 3		
adjustable current response value current of the current-dependent overload release	' 10 A	
operating voltage		
• rated value 20	0 690 V	
• at AC-3 rated value maximum 69	90 V	
operating frequency rated value 50	0 60 Hz	
operational current rated value	0 A	
operational current		
• at AC-3 at 400 V rated value	0 A	
operating power		

4400	
• at AC-3	0.0 1444
— at 230 V rated value	2.2 kW
— at 400 V rated value	4 kW
— at 500 V rated value	5.5 kW
— at 690 V rated value	7.5 kW
operating frequency	
• at AC-3 maximum	15 1/h
Auxiliary circuit	
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
Protective and monitoring functions	
product function	
 ground fault detection 	No
 phase failure detection 	Yes
trip class	CLASS 10
design of the overload release	thermal
breaking capacity maximum short-circuit current (Icu)	
• at AC at 240 V rated value	100 kA
• at AC at 400 V rated value	100 kA
• at AC at 500 V rated value	42 kA
• at AC at 690 V rated value	6 kA
breaking capacity operating short-circuit current (Ics)	
at AC • at 240 V rated value	100 kA
at 400 V rated value	100 kA
at 500 V rated value at 500 V rated value	42 kA
at 690 V rated value at 690 V rated value	4 kA
response value current of instantaneous short-circuit trip	208 A
unit	200 A
Short-circuit protection	
Short-circuit protection product function short circuit protection	Yes
	Yes magnetic
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit	
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit	magnetic
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V	magnetic gG 50 A
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V	gG 50 A gG 40 A
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit at 400 V at 500 V at 690 V	magnetic gG 50 A
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions	gG 50 A gG 40 A gG 40 A
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position	magnetic gG 50 A gG 40 A gG 40 A
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions	gG 50 A gG 40 A gG 40 A
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position	magnetic gG 50 A gG 40 A gG 40 A any screw and snap-on mounting onto 35 mm standard mounting rail
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method	magnetic gG 50 A gG 40 A gG 40 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height	magnetic gG 50 A gG 40 A gG 40 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 97 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width	magnetic gG 50 A gG 40 A gG 40 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 97 mm 45 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth	magnetic gG 50 A gG 40 A gG 40 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 97 mm 45 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing	magnetic gG 50 A gG 40 A gG 40 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 97 mm 45 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V	magnetic gG 50 A gG 40 A gG 40 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 97 mm 45 mm 97 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards	magnetic gG 50 A gG 40 A gG 40 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 97 mm 45 mm 97 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards	magnetic gG 50 A gG 40 A gG 40 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 97 mm 45 mm 97 mm 30 mm 30 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side	magnetic gG 50 A gG 40 A gG 40 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 97 mm 45 mm 97 mm 30 mm 30 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V	magnetic gG 50 A gG 40 A gG 40 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 97 mm 45 mm 97 mm 30 mm 30 mm 9 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards	magnetic gG 50 A gG 40 A gG 40 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 97 mm 45 mm 97 mm 30 mm 30 mm 9 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards	magnetic gG 50 A gG 40 A gG 40 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 97 mm 45 mm 97 mm 30 mm 30 mm 9 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — upwards — upwards — upwards — at the side • for live parts at 400 V — downwards — upwards — upwards — upwards — at the side	magnetic gG 50 A gG 40 A gG 40 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 97 mm 45 mm 97 mm 30 mm 30 mm 9 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — upwards — at the side • for grounded parts at 500 V	magnetic gG 50 A gG 40 A gG 40 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 97 mm 45 mm 97 mm 30 mm 30 mm 30 mm 9 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — at the side • for grounded parts at 500 V — downwards	magnetic gG 50 A gG 40 A gG 40 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 97 mm 45 mm 97 mm 30 mm 30 mm 9 mm 30 mm 9 mm 30 mm 9 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side	magnetic gG 50 A gG 40 A gG 40 A gG 40 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 97 mm 45 mm 97 mm 30 mm 30 mm 9 mm 30 mm 30 mm 30 mm 30 mm 9 mm
product function short circuit protection design of the short-circuit trip design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • for grounded parts at 400 V — downwards — upwards — at the side • for live parts at 400 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side • for grounded parts at 500 V — downwards — upwards — at the side	magnetic gG 50 A gG 40 A gG 40 A gG 40 A any screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 97 mm 45 mm 97 mm 30 mm 30 mm 9 mm 30 mm 30 mm 30 mm 30 mm 9 mm

— upwards	30 mm
— at the side	9 mm
 for grounded parts at 690 V 	
— downwards	50 mm
— upwards	50 mm
— backwards	0 mm
— at the side	30 mm
— forwards	0 mm
 for live parts at 690 V 	
— downwards	50 mm
— upwards	50 mm
— backwards	0 mm
— at the side	30 mm
— forwards	0 mm
Connections/ Terminals	
type of electrical connection	

Connections/ Terminals		
type of electrical connection		
for main current circuit	screw-type terminals	
arrangement of electrical connectors for main current circuit	Top and bottom	
type of connectable conductor cross-sections		
 for main contacts 		
— solid or stranded	2x (0,75 2,5 mm²), 2x 4 mm²	
 finely stranded with core end processing 	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)	
tightening torque		
for main contacts with screw-type terminals	0.8 1.2 N·m	
design of screwdriver shaft	Diameter 5 to 6 mm	
size of the screwdriver tip	Pozidriv size 2	
design of the thread of the connection screw		
 for main contacts 	M3	
Safety related data		
T1 value for proof test interval or service life according to IEC 61508	10 y	
protection class IP on the front according to IEC 60529	IP20	
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front	

Handle

display version for switching status
Certificates/ approvals

General Product Approval Declaration of Conformity

Test Certificates

Confirmation







Special Test Certificate

Type Test Certificates/Test Report

Marine / Shipping













Marine / Shipping

other

Railway



Confirmation



Vibration and Shock

Confirmation

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2411-1JA10-0BA0

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2411-1JA10-0BA0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RV2411-1JA10-0BA0


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2411-1JA10-0BA0&lang=en

Characteristic: Tripping characteristics, I2t, Let-through current

https://support.industry.siemens.com/cs/ww/en/ps/3RV2411-1JA10-0BA0/char

Further characteristics (e.g. electrical endurance, switching frequency)
http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2411-1JA10-0BA0&objecttype=14&gridview=view1

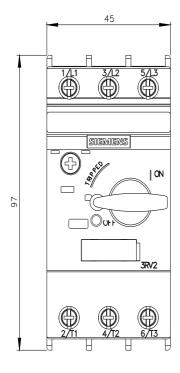

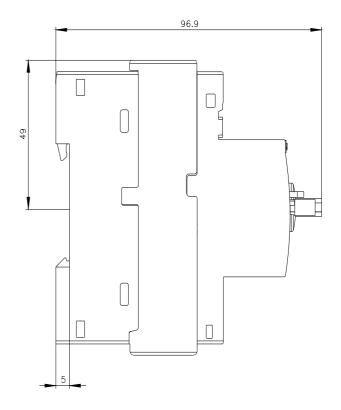

6/25/2022 last modified: