



CSE-SGMR-152-SGMR

SMA Right-Angle Plug to SMA Right-Angle Plug Cable Assembly

The CSE-SGMR-152-SGMR cable assembly provides an SMA plug (male pin) to SMA plug (male pin) connection with 6 in. of RG-316/U coaxial cable.

Operating from 0 Hz to 3 GHz, the CSE-SGMR-152-SGMR cable assembly combines superior performance, compact size, and a convenient threaded mating interface to provide a reliable, easy-to-use cable assembly. Additionally, all Linx coaxial cables and connectors meet RoHS lead free standards and are tested to meet requirements for corrosion resistance, vibration, mechanical and thermal shock.

FEATURES

- 0 Hz to 3 GHz operation
- SMA right-angle plug (male pin)
 - Gold plated brass construction
 - Right-angle design
- RG-316/U 50 Ω coaxial cable

APPLICATIONS

- LPWA
- Cellular IoT - LTE-M (Cat-M1), NB-IoT
- Cellular - 5G/4G LTE/3G/2G
- PC, LAN
- ISM - Bluetooth®, ZigBee®
- GNSS - GPS, Galileo, BeiDou, QZSS
- Automotive, Industrial, Commercial, Enterprise

TABLE 1. ELECTRICAL SPECIFICATIONS

Parameter	Value
Insertion Loss (dB max)	0.9
VSWR (max)	1.7
Impedance	50 Ω
Insulation Resistance	500 MΩ min.

ORDERING INFORMATION

Part Number	Description
CSE-SGMR-152-SGMR	SMA right-angle plug (male pin) to SMA right-angle plug (male pin) on 152 mm (6.0 in) of RG-316/U coaxial cable

Available from Linx Technologies and select distributors and representatives.

PRODUCT DIMENSIONS

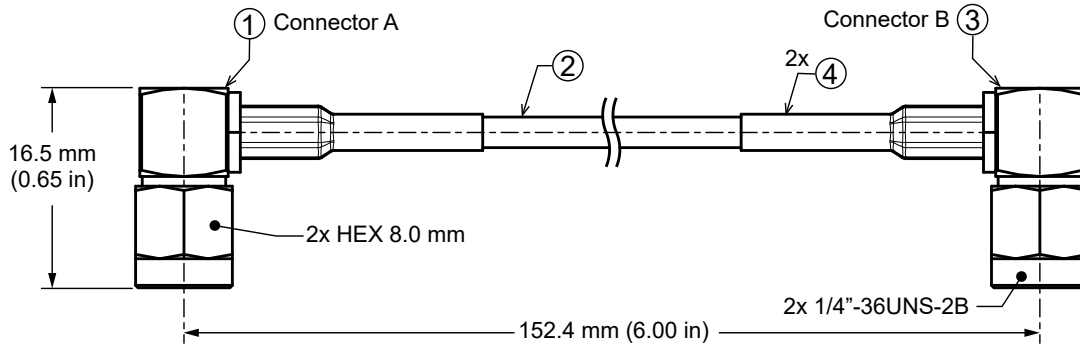


Figure 1. Product Dimensions for the CSE-SGMR-152-SGMR Cable Assembly

TABLE 2. CABLE ASSEMBLY COMPONENTS

Item #	Description	Material	Finish
1	Connector, SMA plug (male pin), right angle	Brass	Gold
2	RG-316/U coaxial cable	RG-316/U	Black
3	Connector, SMA plug (male pin), right angle	Brass	Gold
4	Heat Shrink Tubing	PTFE	Black

TABLE 3. CABLE ASSEMBLY MECHANICAL SPECIFICATIONS

Parameter	Connector A SMA Plug (male pin), right angle	Connector B SMA Plug (male pin), right angle
Fastening Type	SMA Plug (male pin), right angle	Connector B
Recommended Torque	SMA Plug (male pin), right angle	0.9 N m (8.0 in lbs)
Coupling Nut Retention	60 lbs. min.	60 lbs. min.
Connector Durability	500 cycles min.	500 cycles min.
Operating Temperature Range	-40 °C to +120 °C	
Weight	12.8 g (0.45 oz)	

COAXIAL CABLE SPECIFICATIONS

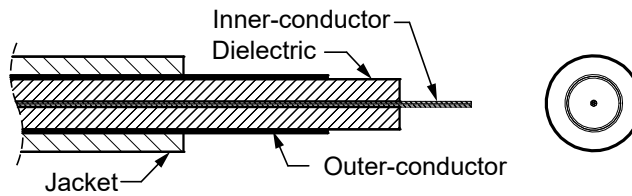


Figure 2. Coaxial Cable Cutaway Diagram

TABLE 4. COAXIAL CABLE MATERIAL SPECIFICATIONS FOR RG-316/U

RG-316/U Coax	Material	Dimensions
Inner-Conductor	Tinned copper clad steel, 7 strand, 0.175 mm/conductor	Ø0.53 mm (0.020 in)
Dielectric	FEP, Clear	Ø1.53 mm (0.06 in)
Outer-Conductor	Silver plated copper braid, Coverage 95%	Ø1.71 mm (0.067 in)
Jacket	FEP, natural	Ø2.53 mm (0.100 in)

TABLE 5. COAXIAL CABLE ELECTRICAL AND PHYSICAL SPECIFICATIONS FOR RG-316/U

Parameter	Value				
Rated Temp Voltage	105 °C 30 V				
Conductor Resistance	302 Ω/km 20 °C max.				
Insulation Resistance	3000 M Ω-km min.				
Dielectric Strength	AC 1000 V/Minute				
Spark Test	5.0 kV				
Insulation	Unaged	Tensile Strength		2500 psi min. (1.76 kg/mm ²)	
		Elongation		200% min.	
	Aged	Tensile Strength		Unaged min. 75% (168 hrs x 232 °C)	
		Elongation		Unaged min. 75% (168 hrs x 232 °C)	
Jacket	Unaged	Tensile Strength		2500 psi min. (1.76 kg/mm ²)	
		Elongation		200% min.	
	Aged	Tensile Strength		Unaged min. 75% (168 hrs x 232 °C)	
		Elongation		Unaged min. 75% (168 hrs x 232 °C)	
Nominal Impedance	50 ± 3 Ω				
Nominal Capacitance	95.8 ± 3 pF/m				
Nominal Velocity of Propagation	69.5%				
VSWR (0 to 6 GHz)	≤ 1.3				
Attenuation (dB/1M)	2.0 GHz 2.80	2.4 GHz 3.10	2.5 GHz 3.15	5.0 GHz 4.85	6.0 GHz 5.20
Minimum Inside Bend radius	12.7 mm (0.5 in)				

INSERTION LOSS

Figure 3 shows the Insertion Loss for the CSE-SGMR-152-SGMR cable assembly. Insertion loss is the loss of signal power (gain) resulting from the insertion of a device in a transmission line.

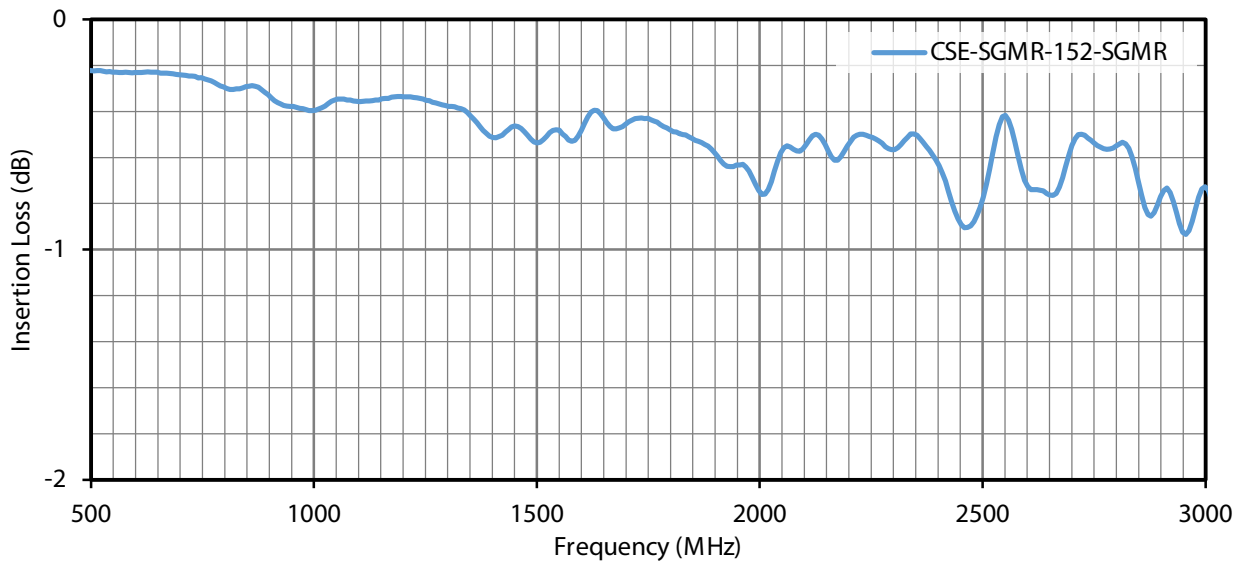


Figure 3. Insertion Loss for the CSE-SGMR-152-SGMR Cable Assembly

VSWR

Figure 4 provides the voltage standing wave ratio (VSWR) across the cable assembly's bandwidth for the CSE-SGMR-152-SGMR cable assembly. VSWR describes how efficiently power is transmitted through the cable assembly. A lower VSWR value indicates better performance at a given frequency.

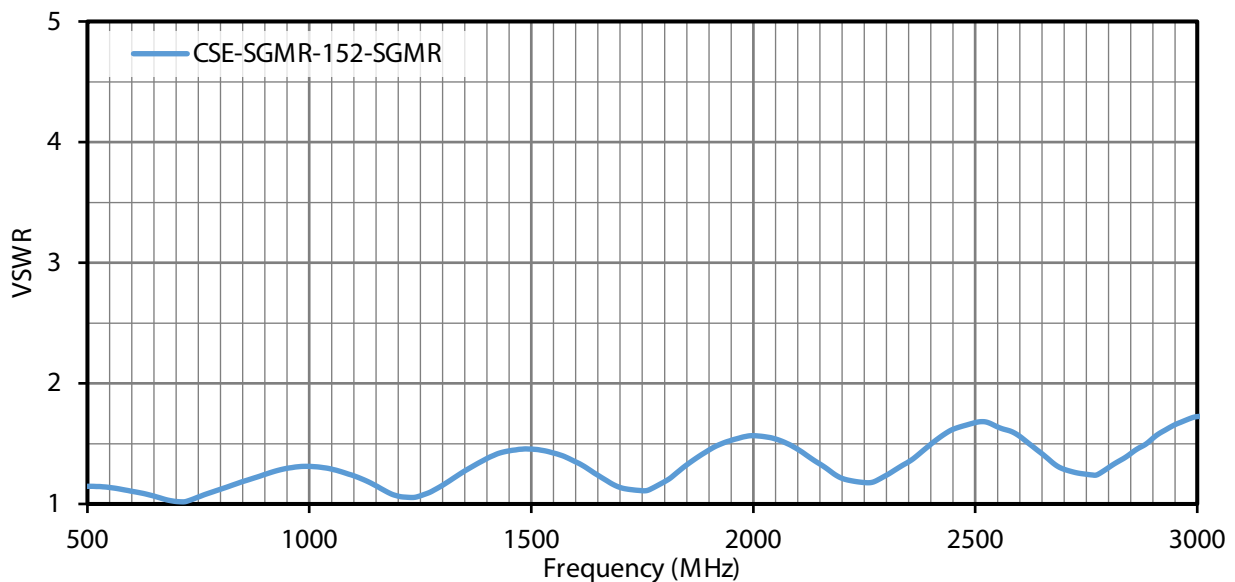


Figure 4. VSWR for the CSE-SGMR-152-SGMR Cable Assembly

PACKAGING INFORMATION

The CSE-SGMR-152-SGMR cable assembly is packaged in a clear plastic bag, in quantities of 50. Distribution channels may offer alternative packaging options.

CABLE ASSEMBLY DEFINITIONS AND USEFUL FORMULAS

VSWR - Voltage Standing Wave Ratio. VSWR is a unitless ratio that describes how efficiently power is transmitted through the cable assembly. A lower VSWR value indicates better performance at a given frequency. VSWR is easily derived from Return Loss.

$$VSWR = \frac{10^{\left[\frac{\text{Return Loss}}{20}\right]} + 1}{10^{\left[\frac{\text{Return Loss}}{20}\right]} - 1}$$

Insertion Loss - The loss of signal power (gain) resulting from the insertion of a device in a transmission line. Insertion loss can be derived from the power transmitted to the load before the insertion of the component P_T and the power transmitted to the load after the insertion of the component P_R .

$$\text{Insertion Loss (dB)} = 10 \log_{10} \frac{P_T}{P_R}$$

TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

te.com

TE Connectivity, TE, TE connectivity (logo), Linx and Linx Technologies are trademarks owned or licensed by the TE Connectivity Ltd. family of companies. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

TE Connectivity warrants to the original end user customer of its products that its products are free from defects in material and workmanship. Subject to conditions and limitations TE Connectivity will, at its option, either repair or replace any part of its products that prove defective because of improper workmanship or materials. This limited warranty is in force for the useful lifetime of the original end product into which the TE Connectivity product is installed. Useful lifetime of the original end product may vary but is not warranted to exceed one (1) year from the original date of the end product purchase.

©2022 TE Connectivity. All Rights Reserved.

10/22 Original