


MATERIAL SPECIFICATIONS:
 Housing: LCP, UL-94V-0 rated
 Contacts: Phosphor bronze, Tin plated

ELECTRICAL SPECIFICATIONS:
 Rated current: UL = 5A / 22 - 26AWG
 cUL = 5A / 22AWG, 3A 24 - 26AWG
 IEC/EN = 3A
 Rated voltage: UL/CUL = 320V, IEC/EN = 160V

MECHANICAL SPECIFICATIONS:
 Applicable wire: 0.14 ~ 0.34mm² solid
 26-22 AWG solid

Wire strip length: 4.5 - 5.5mm
 Connection type: Cage clamp
 Wire release: with tool
 Solder temperature: 270°C max.






ENVIRONMENTAL SPECIFICATIONS:
 Operating Temperature: -40°C ~ +105°C



SAFETY AGENCY APPROVALS:

STANDARDS: UL1977 / CSA-C22.2 No. 182.3

PACKAGING:
 Tape & Reel: 800 |

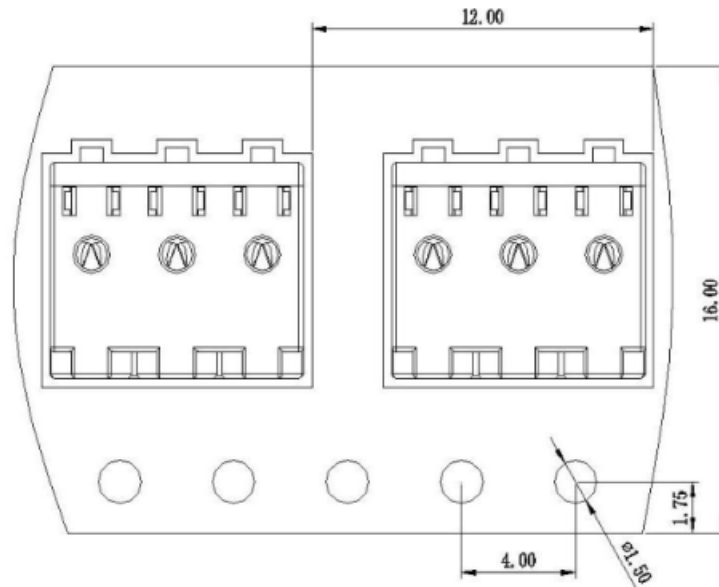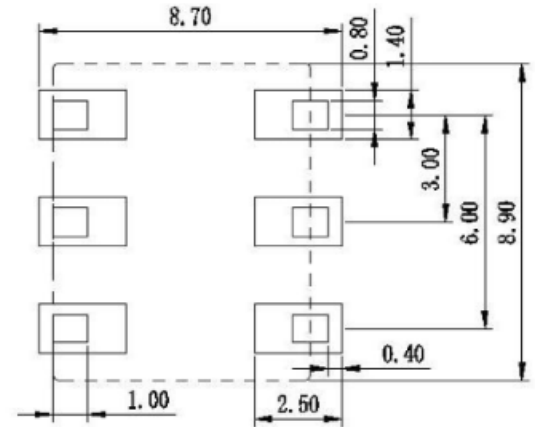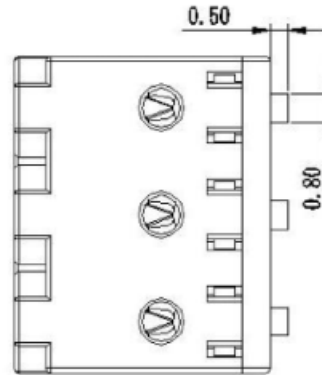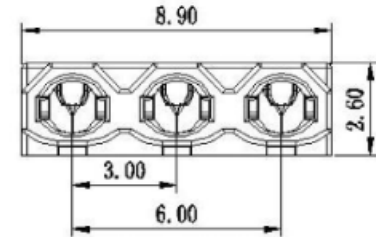

TOLERANCE UNLESS OTHERWISE SPECIFIED	
X	± 1
X.X	± 0.4
X.XX	± 0.13
DRAWN BY	PB
CHECK BY	
APPR BY	
DATE:	3/22/18

Power Dynamics, Inc.

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: 3mm PITCH SMT MICRO TERMINAL BLOCK
 THREE POLE; FOR LED APPLICATIONS

PART #: PD-LTB3-3P		SHEET 1 of 1
MC: B07A-3P	ALL DIMENSIONS FOR REFERENCE ONLY DIMENSIONS ARE IN MILLIMETERS	REV:
SCALE: NTS		

REVISIONS	CHK	CHK	APPR
	CHANGE		
REV	DATE		