




Specification for:
ZW42212TC

110 Delta Drive
Pittsburgh, PA 15238
Phone: 412/696-1333
Fax: 412/696-0333
Email:magnetics@spang.com

DIMENSIONS

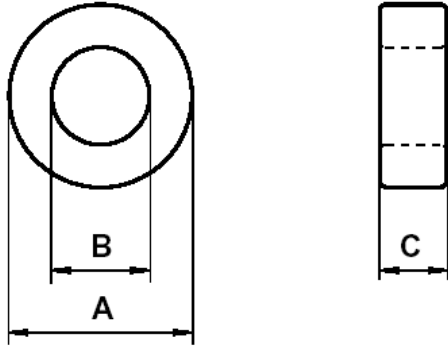

(mm)	Uncoated Nominal:	Coated Min:	Coated Max:
O.D. (A)	22.1	21.63	23.07
I.D. (B)	13.7	12.75	14.15
Ht. (C)	12.7	12.43	13.47

Eff. Parameters		
A _e mm ²	l _e mm	V _e mm ³
52.3	54.1	2834

INDUCTANCE

AL value (nH/T ²)	Test conditions
12080 ± 30%	10 kHz, 0.5 mT (For N = 5, use 0.3 mA), 25°C

ELECTRICAL LOSSES

tan δ / μ _i	Production lot limit Average	Test conditions	
≤ 3.5 · 10 ⁻⁶	≤ 3 · 10 ⁻⁶	10 kHz	0.5 mT, 25°C
≤ 55 · 10 ⁻⁶	≤ 45 · 10 ⁻⁶	100 kHz	

COATING

Epoxy rated for 200°C continuous operation.
Voltage breakdown rating 1500 V Min Wire-to-Wire.

NOTE

Spec. Modifications	Previous	Revised
2005.11.09	LF: General W material Breakdown voltage > 1,000 V	LF: Detail as indicated Breakdown voltage > 1,500 V