


TOLERANCE UNLESS OTHERWISE SPECIFICATION OF MAKE MANUAL REVISIONS TO MASTER.







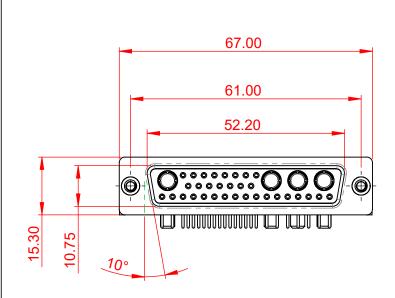



.X ±0.25 .XX ±0.13

.XXX ±0.05


MATERIAL: HOUSING: THERMOPLASTIC POLYESTER, UL94V-0 SHELL: STEEL, NICKEL PLATED CONTACT: COPPER ALLOY, GOLD FLASH PLATING

OPERATING TEMPERATURE: -55°C ~ 125°C

 $\label{eq:signal_contact_current rating: 5A per contact} \\ \mbox{Signal_contact resistance: 10m} Ω MAX. \\ \mbox{Insulator resistance: 5000M} Ω min. \\ \mbox{Dielectric} \\ \mbox{Withstanding voltage: 1000V AC rms} \\ \mbox{Ac rms} \\ \mbox{Insulator resistance: 5000V AC rms} \\ \mbox{$

CONTACT CODE 40 POWER CONTACT FOOTPRINT - 13.20mm 40 IS STANDARD AS SHOWN ON SHEETS 3 & 4 CONTACT CODE 50 POWER CONTACT FOOTPRINT - 20.33mm


	COMBINATION D-SUB			SW REFERENCE NO.: 630 COMBO ASSEMBLY				
				DRAWN: C.B		DATE: JAN. 01/2019		19
				CHECKED:		DATE:		
		EDAC INC TORONTO, ONTARIO CANADA ON TO QUALITY & SERVICE	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: (IN C.	.A.D. 1:1)	SHEET 1	OF	4
				DRAWING NUMBER: 630-36W42		4250-4N4		ISSUE
	YOUR CONNECTION TO QUALITY			PART NUMBER:	630-36W4	4250-4N4		1





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY. JL94V-0

ORIGINAL

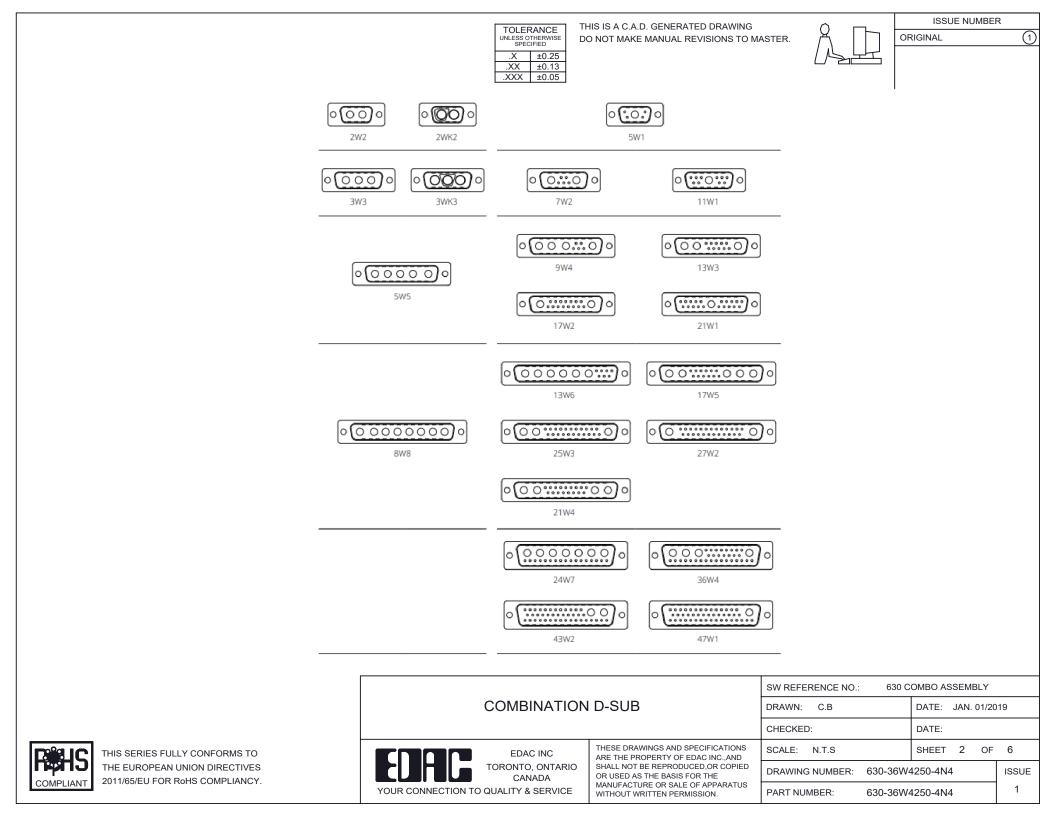



THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER ORIGINAL

(1)

2W2 / 2WK2

3W3 / 3WK3

5W1 Male/Female

7W2 Male/Female

11W1 Male/Female

17W2 Male/Female

COMBINATION D-SUB





5W5 Male



PCB EDGE

8W8 Male



PCB EDGE



PCB EDGE




21W4 Male/Female

PCB EDGE


22.70

5W5 Female



8W8 Female






PCB EDGE

27W2 Male/Female


21W1 Male/Female




CURRENT RATING / ØA 10A / 2.2 20A / 3.3 30A / 3.7 40A / 4.2



SW REFERENCE NO. 630 COMBO ASSEMBLY C.B DATE: JAN. 01/2019 DRAWN: CHECKED: DATE: 3 OF 4 SCALE: N.T.S SHEET 630-36W4250-4N4 DRAWING NUMBER: ISSUE 1 630-36W4250-4N4 PART NUMBER:





THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY. COMPLIANT



TOLERANCE UNLESS OTHERWISE SPECIFIED DAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.















13W3 Male





25W3 Male





2.77


24.77

23.36

PCB EDGE

PCB EDGE

36W4 Female



13W6 Male





30.50

2.77

22.16

20.76

13W6 Female

13W3 Female

.X ±0.25 .XX ±0.13 .XXX ±0.05

43W2 Female




17W5 Male


COMPLIANT







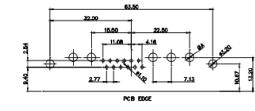


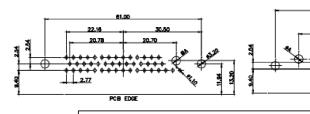

20.7


13.72

PCB EDGE



31.75

21.9



		SW REFERENCE NO.: 630 COMBO ASSEMBLY			
	COMBINATION	DRAWN: C.B	DATE: JAN. 01/20	19	
			CHECKED:	DATE:	
THIS SERIES FULLY CONFORMS TO	EDAC INC	OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS	SCALE: N.T.S	SHEET 4 OF	4
THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR R₀HS COMPLIANCY.	EDAC INC TORONTO, ONTARIO CANADA		DRAWING NUMBER: 630-36W	4250-4N4	ISSUE
	YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 630-36W	4250-4N4	1