


** Not all features are shown in this drawing. For more detailed information, please contact your Fair-Rite representative.

UNCONTROLLED ~CATALOG~ DRAWING

SIZE	PART NO.	REV.
B	5977001321	~

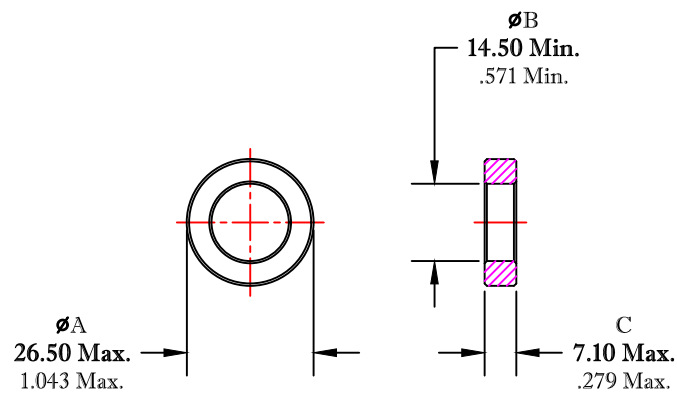

AFTER COATING

DIMENSIONS
BOLD NUMBERS ARE IN MILLIMETERS
 LIGHT NUMBERS ARE IN INCHES

ELECTRICAL SPECIFICATIONS							
$\Sigma l/A(mm^{-1})$	$l_e (mm)$	$A_e (mm^2)$	$V_e (mm^3)$	$L_o (nH)$	$A_L (nH)$ @10 kHz <10gauss	$\tan \delta/\mu_1$ @100 kHz 1gauss	
2.0033	61.7	30.8	1901	0.627	1350 ^{+25%} _{-30%}	$\leq 20 \times 10^{-6}$	

- NOTES:
- 1 - THIS PART TO BE THERMOSET PLASTIC COATED, USE APPROVED FR# 5977001301.
 - 2 - COATING THICKNESS = 0.25mm (.010") Max.
 - 3 - COATED TOROID TO WITHSTAND A MINIMUM BREAKDOWN VOLTAGE OF 1000 Vrms, WHEN UNIFORMLY APPLIED ACROSS THE "C" DIMENSION.

FR# 77

FAIR-RITE PRODUCTS CORP.

TITLE: COATED TOROID

DRAWN BY J.SERENCISCS	DATE 07-18-2018	SIZE	PART NO.	REV.
CHKD BY		B	5977001321	~
APPRVD BY		SCALE	NONE	SHEET 1 of 1