



Hole pattern:

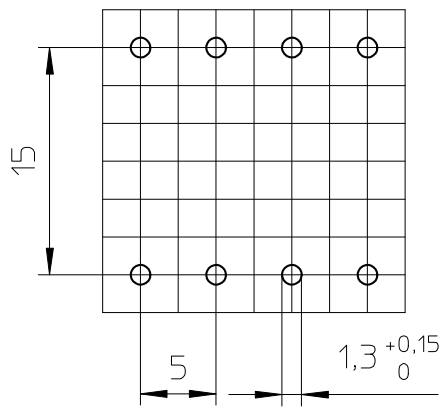

Coil former material: Sumikon PM-9820 (PF), glass-reinforced.  
 UL file number: E41429 - UL94V-0.  
 Pin material: Copper-clad steel, Sn plated.  
 Max. operating temp.: acc. to IEC 60 085 class H, 180°C.  
 Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3.5sec.  
 Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2sec.  
 Min. winding area: 33.3 mm<sup>2</sup>  
 Mean length of turn: 44.5 mm.

CLASS.NO.		CSH-E20/10/6-1S-8P-C		4322 021 04081		2002-03-28	
						2005-03-08	
						2012-11-06	
NAME NAAM	M. Marszalek	SUPERS. VERV.		1 SH BL.	SH BL. 112 - 001	010	A4
MPA	CHECK CONTR.	DAT.	02-03-28	Property of Eigendom van		© FERROXCUBE 2000	