


## Specification Sheet

Part Number: MB3A0A2H4

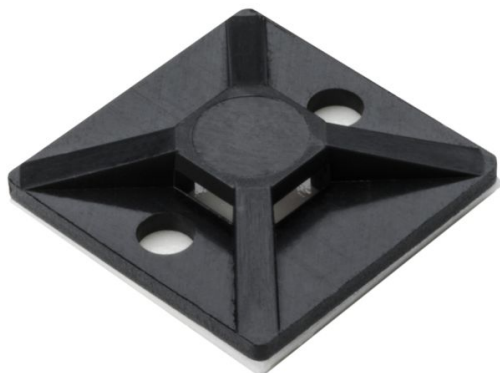

Adhesive Cable Tie Mount, .75" x .75", .14" Max Tie Width, .12" Hole Dia, PA66/Acrylate, Black, 500/pkg

**Article Number**

151-28709

**Type**

MB3A

**Color**

Black (BK)

**Features & Benefits**

- For use with 18 and 30 pound cable ties to provide stability when securing bundles.
- Secures with acrylic based adhesive backing for heavy bonding applications
- Can also be secured using two or four screws; providing multiple options.
- 4 way opening allows cable ties to be installed parallel or perpendicular to wire bundles.

**Quantity Per**

bag

**Product Description**

HellermannTyton adhesive fastened mounting bases are used with 18 through 150 pound cable ties to provide stability when securing bundles. The mounts are installed using the adhesive backing and/or by securing two or four screws. The 4 way opening allows the cable ties to be inserted parallel or perpendicular to the wire bundles.

|  |   |
|--|---|
| <b>Short Description</b>                     | Adhesive Cable Tie Mount, .75" x .75", .14" Max Tie Width, .12" Hole Dia, PA66/Acrylate, Black, 500/pkg |
| <b>Global Part Name</b>                      | MB3A-PA66-BK  |
| <b>Length L (Imperial)</b>                   | 0.75  |
| <b>Length L (Metric)</b>                     | 19.0  |
| <b>Fixation Method</b>                       | Screw Mounting and Adhesive   |
| <b>Width W (Imperial)</b>                    | 0.75  |
| <b>Width W (Metric)</b>                      | 19.0  |
| <b>Cable Ties</b>                            | T18 - T30   |
| <b>Height H (Imperial)</b>                   | .19   |
| <b>Height H (Metric)</b>                     | 4.80  |
| <b>Cable Tie Width Max (Imperial)</b>        | 0.14  |
| <b>Cable Tie Width Max (Metric)</b>          | 3.6   |
| <b>Mounting Hole Diameter D (Imperial)</b>   | 0.12  |
| <b>Mounting Hole Diameter D (Metric)</b>     | 3.0 mm  |
| <b>Mounting Hole Diameter D Max (Metric)</b> | 3.0   |
| <b>Mounting Hole Centers (Imperial)</b>      | 0.52  |

|                                       |                                    |
|---------------------------------------|------------------------------------|
| <b>Material</b>                       | Polyamide 6.6 (PA66)               |
| <b>Material Shortcut</b>              | PA66                               |
| <b>Adhesive</b>                       | Acrylate with base of acrylic foam |
| <b>Flammability</b>                   | UL 94 V2 (excluding adhesive)      |
| <b>Adhesive Operating Temperature</b> | to +194°F (+90°C)                  |
| <b>Operating Temperature (Metric)</b> | -40°F to +185°F (-40°C to +85°C)   |
| <b>ROHS Complaint</b>                 | Yes                                |
| <b>Package Quantity(Imperial)</b>     | 500                                |
| <b>Package Quantity (Metric)</b>      | 500                                |
| <b>Customs Number</b>                 | 3926909988                         |