



.XX ±0.13 .XXX ±0.05

ISSUE NUMBER	
ORIGINAL	(1)

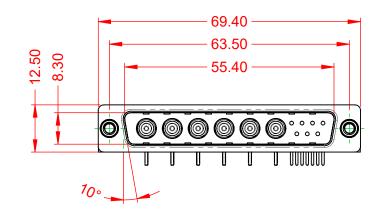




NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, GOLD FLASH PLATED

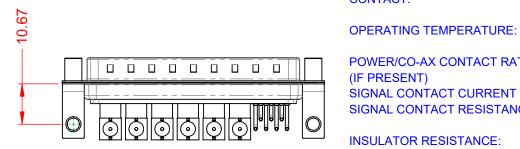


POWER/CO-AX CONTACT RATING:	75Ω (IMPEDAN
(IF PRESENT)	
SIGNAL CONTACT CURRENT RATING:	5A PER CONT
SIGNAL CONTACT RESISTANCE:	10mΩ MAX.
INSULATOR RESISTANCE:	5000MΩ min.

DIELECTRIC WITHSTANDING VOLTAGE: NCE)

-55°C ~ 125°C

TACT

1000V AC rms



COMBINATION D-SUB		SW REFERENCE NO.: 629 COMBO ASSEMBLY			
		DRAWN: C.B	DATE: JAN. 01/20	19	
			DATE:		
EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	2	
TORONTO, ONTARIO CANADA	OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS	DRAWING NUMBER: 629-13W6	6240-7NE	ISSUE	
		PART NUMBER: 629-13W6	6240-7NE	1	



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

