

**Product Discontinuation Notices**

Emergency Stop Switches

Issue Date  
January 30, 2020  
No. ISE-Z-2001113

**Discontinuation Notice of Emergency Stop Switches of A22NZ-S-P□□ N(Switch Blocks) and A22NZ-T-□PN(Lighting Units) series.**

**Product Discontinuation**

Emergency Stop Switches

**Switch Blocks**

**Model A22NZ-S-P□□N**

**Lighting Units**

**Model A22NZ-T-□PN**



**Recommended Replacement**

Pushbutton Switches/Emergency Stop Switches

**Switch Blocks**

**Model A22NZ-S-P□□**

**Lighting Units**

**Model A22NZ-T-□P**

**[ Final order entry date ]**

The end of March, 2021

**[ Date of The Last Shipping ]**

The end of June, 2021

**[ Caution on recommended replacement ]**

Compatible.

**[ Difference from discontinued product ]**

Recommended replacement Model	Body Color	Dimensions	Wire connection	Mounting Dimensions	Characteristics	Operation ratings	Operation methods
A22NZ-S-P□□	**	**	**	**	**	-	-
A22NZ-T-□P	**	**	**	**	**	-	-


- \*\* : Compatible
- \* : The change is a little/Almost compatible
- : Not compatible
- : No corresponding specification

Recommended replacement Model have the same safety standards.(EN60947-5-1,EN60947-5-5)

**[ Product Discontinuation and recommended replacement ]**

Product discontinuation	Recommended replacement
A22NZ-S-P1AN	A22NZ-S-P1A
A22NZ-S-P1BN	A22NZ-S-P1B
A22NZ-S-P2AN	A22NZ-S-P2A
A22NZ-S-P2BN	A22NZ-S-P2B
A22NZ-S-P2CN	A22NZ-S-P2C
A22NZ-T-APN	A22NZ-T-AP
A22NZ-T-BPN	A22NZ-T-BP
A22NZ-T-CPN	A22NZ-T-CP
A22NZ-T-DPN	A22NZ-T-DP
A22NZ-T-EPN	A22NZ-T-EP

**[ Body color ]**


Product discontinuation Model A22NZ-S-P□□N	Recommendable replacement Model A22NZ-S-P□□
	

Product discontinuation Model A22NZ-T-□PN	Recommendable replacement Model A22NZ-T-□P
	

**[ Wire connection ]**

Product discontinuation Model A22NZ-S-P□□N Model A22NZ-T-□PN	Recommendable replacement Model A22NZ-S-P□□ Model A22NZ-T-□P
--	--

Terminal Arrangement

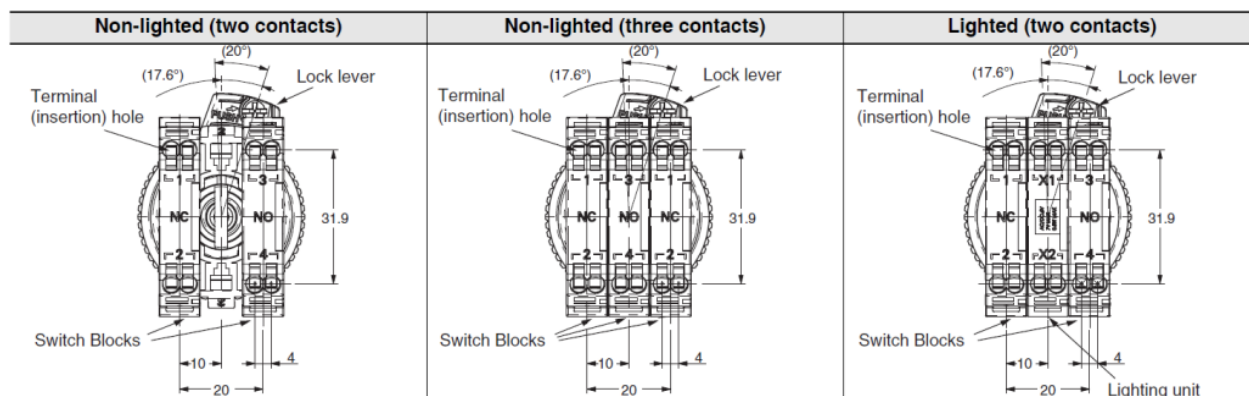

**[ Mounting dimensions - Dimensions ]**

<b>Product discontinuation</b> <b>Model A22NZ-S-P□□N</b>	<b>Recommendable replacement</b> <b>Model A22NZ-S-P□□</b>

<b>Product discontinuation</b> <b>Model A22NZ-T-□PN</b>	<b>Recommendable replacement</b> <b>Model A22NZ-T-□P</b>

**[ Characteristics ]**

Item	Product discontinuation Model A22NZ-S-P□□N	Recommendable replacement Model A22NZ-S-P□□																																													
Ratings	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2" style="text-align: center;">Rated insulation voltage (V)</th> <th rowspan="2" style="text-align: center;">Rated carry current (A)</th> <th rowspan="2" style="text-align: center;">Rated voltage (V)</th> <th colspan="4" style="text-align: center;">Rated current (A)</th> </tr> <tr> <th style="text-align: center;">AC15 (Inductive load)</th> <th style="text-align: center;">AC12 (Resistive load)</th> <th style="text-align: center;">DC13 (Inductive load)</th> <th style="text-align: center;">DC12 (Resistive load)</th> </tr> </thead> <tbody> <tr> <td rowspan="8" style="text-align: center;">600</td> <td rowspan="8" style="text-align: center;">10</td> <td>24 VAC</td> <td>10</td> <td>10</td> <td rowspan="4" style="text-align: center;">---</td> <td rowspan="4" style="text-align: center;">---</td> </tr> <tr> <td>120 VAC</td> <td>6</td> <td>10</td> </tr> <tr> <td>240 VAC</td> <td>3</td> <td>6</td> </tr> <tr> <td>380 VAC</td> <td>1.9</td> <td>2</td> </tr> <tr> <td>440 VAC</td> <td>1.6</td> <td>2</td> <td rowspan="3" style="text-align: center;">4</td> <td rowspan="3" style="text-align: center;">8</td> </tr> <tr> <td>24 VDC</td> <td>---</td> <td>---</td> </tr> <tr> <td>120 VDC</td> <td>---</td> <td>---</td> <td>1.1</td> <td>2.2</td> </tr> <tr> <td>240 VDC</td> <td>---</td> <td>---</td> <td>0.55</td> <td>1.1</td> </tr> </tbody> </table>		Rated insulation voltage (V)	Rated carry current (A)	Rated voltage (V)	Rated current (A)				AC15 (Inductive load)	AC12 (Resistive load)	DC13 (Inductive load)	DC12 (Resistive load)	600	10	24 VAC	10	10	---	---	120 VAC	6	10	240 VAC	3	6	380 VAC	1.9	2	440 VAC	1.6	2	4	8	24 VDC	---	---	120 VDC	---	---	1.1	2.2	240 VDC	---	---	0.55	1.1
Rated insulation voltage (V)	Rated carry current (A)	Rated voltage (V)				Rated current (A)																																									
			AC15 (Inductive load)	AC12 (Resistive load)	DC13 (Inductive load)	DC12 (Resistive load)																																									
600	10	24 VAC	10	10	---	---																																									
		120 VAC	6	10																																											
		240 VAC	3	6																																											
		380 VAC	1.9	2																																											
		440 VAC	1.6	2	4	8																																									
		24 VDC	---	---																																											
		120 VDC	---	---			1.1	2.2																																							
		240 VDC	---	---	0.55	1.1																																									

Item	Product discontinuation Model A22NZ-T-□PN	Recommendable replacement Model A22NZ-T-□P																												
Ratings	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: center;">Rated voltage</th> <th style="text-align: center;">Operating voltage</th> <th style="text-align: center;">Current value</th> </tr> </thead> <tbody> <tr> <td>6 VAC/VDC</td> <td>6 VAC/VDC ± 10%</td> <td>Approx. 11 mA</td> </tr> <tr> <td>12 VAC/VDC</td> <td>12 VAC/VDC ± 10%</td> <td>Approx. 12 mA</td> </tr> <tr> <td>24 VAC/VDC</td> <td>24 VAC/VDC ± 10%</td> <td>Approx. 12 mA</td> </tr> <tr> <td>100 VAC</td> <td>100 VAC ± 10%</td> <td rowspan="3" style="text-align: center;">Approx. 12 mA</td> </tr> <tr> <td>110 VAC</td> <td>110 VAC ± 10%</td> </tr> <tr> <td>120 VAC</td> <td>100 VAC to 130 VAC</td> </tr> <tr> <td>200 VAC</td> <td>200 VAC ± 10%</td> <td rowspan="4" style="text-align: center;">Approx. 12 mA</td> </tr> <tr> <td>220 VAC</td> <td>220 VAC ± 10%</td> </tr> <tr> <td>230 VAC</td> <td>230 VAC ± 10%</td> </tr> <tr> <td>240 VAC</td> <td>220 VAC to 250 VAC</td> </tr> </tbody> </table>		Rated voltage	Operating voltage	Current value	6 VAC/VDC	6 VAC/VDC ± 10%	Approx. 11 mA	12 VAC/VDC	12 VAC/VDC ± 10%	Approx. 12 mA	24 VAC/VDC	24 VAC/VDC ± 10%	Approx. 12 mA	100 VAC	100 VAC ± 10%	Approx. 12 mA	110 VAC	110 VAC ± 10%	120 VAC	100 VAC to 130 VAC	200 VAC	200 VAC ± 10%	Approx. 12 mA	220 VAC	220 VAC ± 10%	230 VAC	230 VAC ± 10%	240 VAC	220 VAC to 250 VAC
Rated voltage	Operating voltage	Current value																												
6 VAC/VDC	6 VAC/VDC ± 10%	Approx. 11 mA																												
12 VAC/VDC	12 VAC/VDC ± 10%	Approx. 12 mA																												
24 VAC/VDC	24 VAC/VDC ± 10%	Approx. 12 mA																												
100 VAC	100 VAC ± 10%	Approx. 12 mA																												
110 VAC	110 VAC ± 10%																													
120 VAC	100 VAC to 130 VAC																													
200 VAC	200 VAC ± 10%	Approx. 12 mA																												
220 VAC	220 VAC ± 10%																													
230 VAC	230 VAC ± 10%																													
240 VAC	220 VAC to 250 VAC																													

Specifications and prices in this product news are as of the issue date and are subject to change without notice. Only main changes in specifications are described in this document. Please be sure to read the relevant catalogs, datasheets, product specifications, instructions, and manuals for precautions and necessary information when using products.