


# SS-5FH

## Subminiature fast-acting fuses

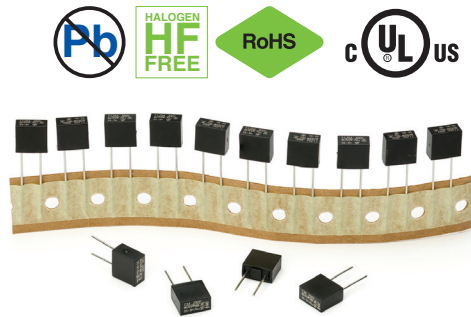

### Applications

- Primary circuit protection for lighting ballasts
- LED Lighting primary protection
- High short-circuit current devices

### Agency information

- cULus, File E19180, Guide JDYX/JDYX7

### Ordering

- Specify product and packaging code (i.e., SS-5FH-3.15A-AP)

### Product features:

- Halogen free, lead free, RoHS compliant
  - Fast-acting, high breaking capacity subminiature fuse
  - Plastic cap and base, flammability UL 94V0
  - Lead wire with tin-plated copper, diameter 0.6 mm
  - Protects against harmful overcurrents in primary and secondary applications
  - Small radial-leaded design minimizes board space and eliminates need for additional mounting components
- Designed to UL 248-14

**Electrical characteristics**

Amps	1.0I <sub>n</sub>	1.5I <sub>n</sub>	2.0I <sub>n</sub>
3.15 A	4 hours, min	10 minutes, max	2 minutes, max

**Specifications**


Part number	Voltage rating AC	Voltage rating DC	Interrupting rating (amps) @ rated voltage (50 Hz) AC <sup>1</sup>	Interrupting rating (amps) @ rated voltage DC	Typical DC cold resistance (mΩ) <sup>2</sup>	Typical pre-arcing I <sup>2</sup> t (A <sup>2</sup> s) <sup>3</sup>	Typical voltage drop @ 1I <sub>n</sub> (mV) <sup>4</sup>	Max power dissipation @ 1I <sub>n</sub> (mW) <sup>5</sup>	Agency information
									cULus
SS-5FH-3.15A	350	150	100	100	31.5	22.5	168	675	X

1. Interrupting ratings: measured at 100 A, 95% to 100% PF on AC.
2. Typical DC cold resistance (measured at <10% of rated current).
3. The typical I<sup>2</sup>t value is measured at 10 times of I<sub>n</sub>.
4. Typical voltage drop @ 1I<sub>n</sub> (measured at +20 °C ambient temperature at rated current).
5. Maximum power dissipation (measured at +20 °C ambient temperature at rated current).

**Packaging Codes**


-BK	200 fuses in a polybag, lead length L = 4.3±0.3.
-AP	Ammo Pack, 1000 fuses, pitch = 12.7

**Dimensions - mm [in]**

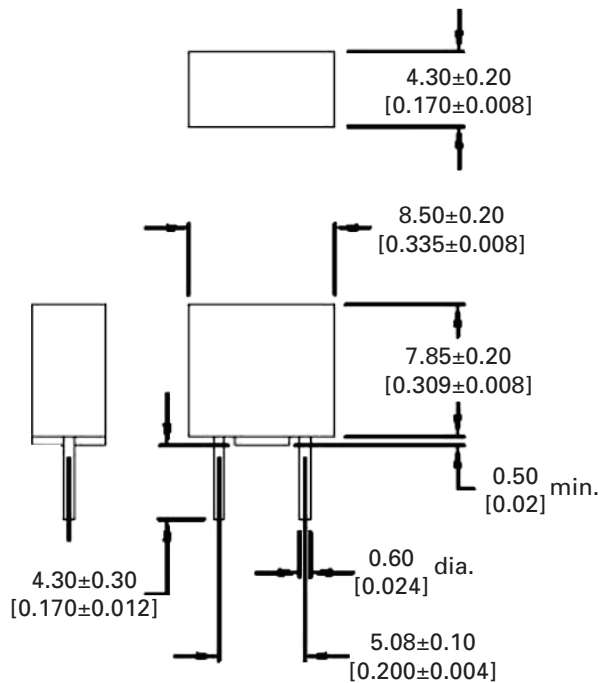


BK Pack

**Recommended pad layout**

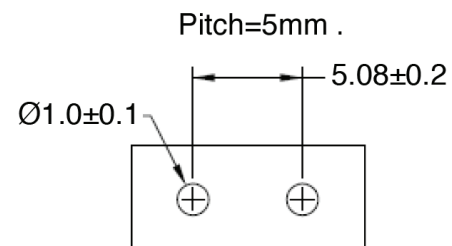


**Time-current curves**

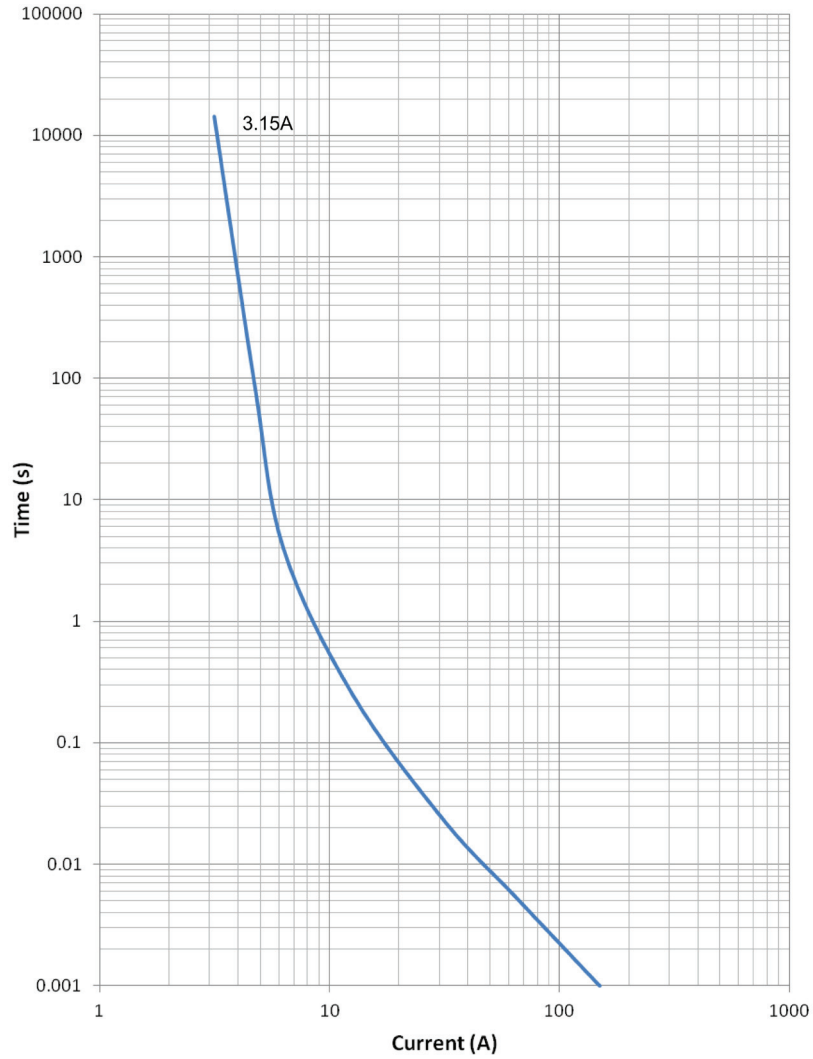

**Temperature derating curve**

- Normal operating temperature: +25 °C ± 2 °C
- Operating temperature range: -40 °C to +85 °C with proper correction factor applied

**Correction factor chart**

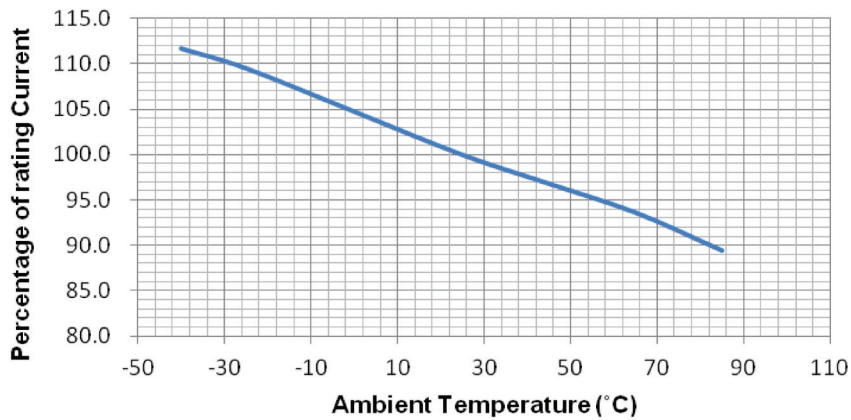


**Soldering**

**Wave solder**

Reservoir temperature: 260°C, Max.10Sec.

**Recommended Profile**

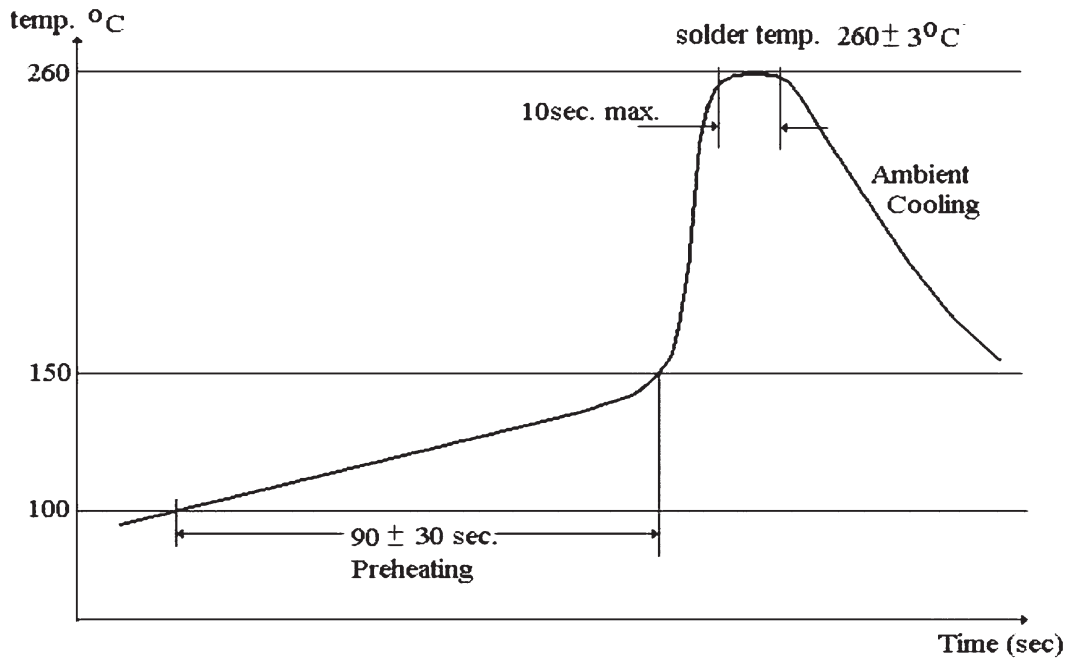

**Manual solder**

350 °C, 4-5Sec. (by soldering iron), generally manual, hand soldering is not recommended.

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

**Eaton**  
**Electronics Division**  
1000 Eaton Boulevard  
Cleveland, OH 44122  
United States  
[www.eaton.com/electronics](http://www.eaton.com/electronics)

© 2017 Eaton  
All Rights Reserved  
Printed in USA  
Publication No. 10274 BU-SB14519  
June 2017

Eaton is a registered trademark.

All other trademarks are property of their respective owners.