




THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

| REV. | ECN NO. | DATE | SIGN | DESCRIPTION |
|------|---------|------|------|-------------|
| | | | | |
| | | | | |
| | | | | |

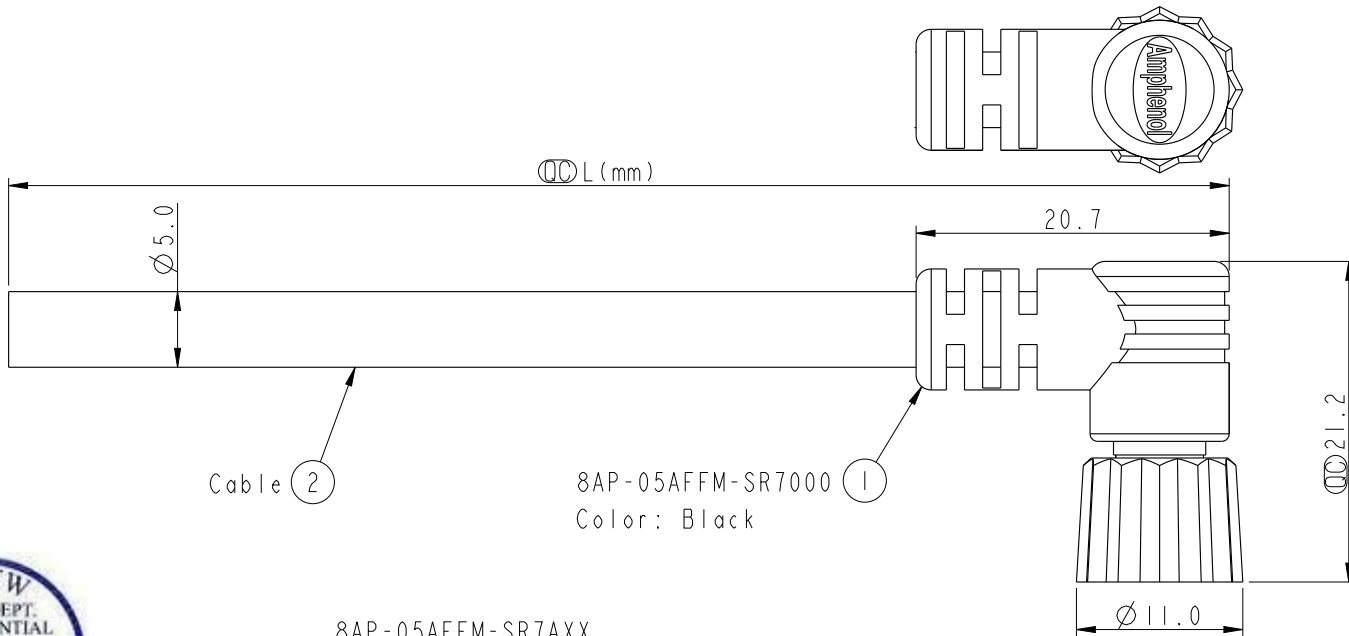


Cable ② 8AP-05AFFM-SR7000 ①
Color: Black

8AP-05AFFM-SR7AXX
 XX: 01~99Meters
 01: 01Meter
 02: 02Meter
 ...
 99: 99Meters
 Cable Length(L): 01~99Meters



Conn.

- Note:
- * \varnothing Important Dimension.
 - * Waterproof Rate: IP67.
 - * Connector: PU, Black.
 - * Female Pin: Copper Alloy, Gold Plated.
 - * Screw Nut: Nylon+GF, Black.
 - * O-Ring: Viton, Green.
 - * Cable: UL2464 24AWG*5C+Talcum, PVC Jacket, UV Resistant, OD=5.0, Black.
 - * Cable Length Tolerance: 01M: ±40mm
 02~05M: ±60mm
 06~10M: ±100mm
 11~30M: ±200mm
 31~99M: ±500mm



Pin Assignments
Front View

| Pin | Wire Color |
|-------|------------|
| 5 | Yellow 黃 |
| 4 | Orange 橘 |
| 3 | Red 紅 |
| 2 | Brown 棕 |
| 1 | Black 黑 |
| Conn. | Wire Color |

Pin Out

| | | | | |
|-----------|---------|-------|-----------------------------|---------|
| UNIT:mm | | TITLE | M8 5Pin Cable F Conn. F Pin | |
| TOLERANCE | ±0.5 mm | SCALE | 2:1 | SIZE A4 |
| REV. | A | SHEET | 1 | OF 1 |
| WC-REV. | A.2 | QC | Inspection item | |

Amphenol LTW
安費諾亮泰企業股份有限公司

| | | | | | |
|----------|-------------------|-------------|-------|------|------------|
| ITEM NO | 8AP-05AFFM-SR7AXX | DRAWN BY | Mila | DATE | 2014-01-09 |
| DWG NO | 8AP-05AFFM-SR7AXX | CHECKED BY | Jimmy | DATE | 2014-01-09 |
| CUSTOMER | ALTW | APPROVED BY | Jerry | DATE | 2014-01-09 |