


QSFP-100G-ZR4-LP-AR-C

Arista Networks® QSFP-100G-ZR4-AR Compatible TAA Compliant 100GBase-ZR4 QSFP28 Transceiver (SMF, 1295nm to 1309nm, 80km, LC, DOM)

Features:

- Supports 103Gbps
- QSFP28 MSA Compliant
- Single 3.3V power supply
- 100GBASE-ZR4 point-to-point Ethernet links
Rx sensitivity of -28dBm with enabled KR4 FEC
in host for up to 80km SMF
- LAN WDM EML laser and SOA+PIN Receiver
- Maximum power consumption 5W
- Commercial Temperature 0 to 70 Celsius
- Class 1 Laser
- Duplex LC receptacle
- Hot Pluggable
- Two Wire Serial Interface Digital Diagnostic Monitoring
- RoHS Compliant and Lead Free

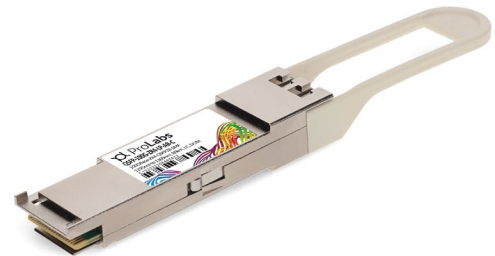

Applications:

- 100GBase Ethernet
- Access and Enterprise

Product Description

This Arista Networks® QSFP-100G-ZR4-AR compatible QSFP28 transceiver provides 100GBase-ZR4 throughput up to 80km over single-mode fiber (SMF) using a wavelength of 1295nm to 1309nm via an LC connector. It is guaranteed to be 100% compatible with the equivalent Arista Networks® transceiver. This easy to install, hot swappable transceiver has been programmed, uniquely serialized and data-traffic and application tested to ensure that it will initialize and perform identically. Digital optical monitoring (DOM) support is also present to allow access to real-time operating parameters. This transceiver is Trade Agreements Act (TAA) compliant. We stand behind the quality of our products and proudly offer a limited lifetime warranty.

ProLabs' transceivers are RoHS compliant and lead-free.

TAA refers to the Trade Agreements Act (19 U.S.C. & 2501-2581), which is intended to foster fair and open international trade. TAA requires that the U.S. Government may acquire only "U.S. – made or designated country end products."



Regulatory Compliance

- ESD to the Electrical PINs: compatible with MIL-STD-883E Method 3015.4.
- ESD to the LC Receptacle: compatible with IEC 61000-4-3.
- EMI/EMC: compatible with FCC Part 15 Subpart B Rules, EN55022:2010.
- Laser Eye Safety: compatible with FDA 21CFR, EN60950-1& EN (IEC) 60825-1, 2.
- RoHS: compliant with EU RoHS 2.0 directive 2015/863/EU.

Absolute Maximum Ratings

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Notes |
|------------------------------------|----------------|------|---------|---------|------|-------|
| Maximum Supply Voltage | Vcc | -0.5 | | 3.6 | V | |
| Data Input Voltage Differential | VIN | | | 1 | V | |
| Control Input Voltage | V _I | -0.3 | | Vcc+0.5 | V | |
| Control Output Current | I _o | -20 | | 20 | mA | |
| Storage Temperature | Tstg | -40 | | +85 | °C | |
| Operating Case Temperature | Tc | 0 | | 70 | °C | |
| Relative Humidity (Non-Condensing) | RH | 5 | | 95 | % | |
| Aggregate Bit Rate | ABR | | 103.125 | | Gbps | |
| Data Rate Per Lane | BR | | 25.78 | | Gbps | |
| Operating Distance | | 2 | | 80,000 | m | 1 |

Notes:

1. 40km without FEC and 80km with FEC.

Electrical Characteristics

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Notes |
|---|--------------------------------|----------------------|------|----------------------|-------|-----------------------|
| Power Supply Voltage | V _{CC} | 3.135 | 3.3 | 3.465 | V | |
| Maximum Power Dissipation | P _D | | | 5 | W | |
| Maximum Power Dissipation (Low-Power Mode) | P _{DLP} | | | 1.5 | W | |
| Instantaneous Peak Current at Hot Plug | I _{CC_IP} | | | 2000 | mA | |
| Sustained Peak Current at Hot Plug | I _{CC_SP} | | | 1650 | mA | |
| Control Input Voltage High | V _I | V _{CC} *0.7 | | V _{CC} +0.3 | V | |
| Control Input Voltage Low | V _I | -0.3 | | V _{CC} *0.3 | V | |
| 2-Wire Serial Interface Clock Rate | | | | 400 | kHz | |
| Module Power Supply Noise Tolerance 10Hz-10MHz (Peak-to-Peak) | | | | 66 | mVp-p | |
| Rx Differential Data Output Load | | | 100 | | Ω | |
| Transmitter (Module Input) | | | | | | |
| Differential Data Output Amplitude | V _{OUT,pp} | | | 900 | mVp-p | |
| Differential Termination Mismatch | | | | 10 | % | |
| Output Rise/Fall Time (20-80%) | T _r /T _f | 12 | | | ps | |
| ModPrsL and IntL | V _{OL} | 0 | | 0.4 | V | I _{OL} =4mA |
| | V _{OH} | V _{CC} -0.5 | | V _{CC} +0.3 | V | I _{OL} =-4mA |
| Receiver (Module Output) | | | | | | |
| Differential Data Input Amplitude | V _{IN,pp} | 95 | | 900 | mVp-p | |
| Differential Termination Mismatch | | | | 10 | % | |
| LPMode, Reset, and ModSelL | V _{IL} | -0.3 | | 0.8 | V | |
| | V _{IH} | 2 | | V _{CC} +0.3 | V | |

Notes:

1. High-Speed Signal: compliant to IEEE802.3 CAUI-4 C2M.
2. Low-Speed Signal: compliant to SFF-8679.

Optical Characteristics

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Notes |
|--|---|---------|---------|---------|-------|-------|
| Transmitter | | | | | | |
| Wavelength L0 | $\lambda C0$ | 1294.53 | 1295.56 | 1296.59 | nm | |
| Wavelength L1 | $\lambda C1$ | 1299.02 | 1300.05 | 1301.09 | nm | |
| Wavelength L2 | $\lambda C2$ | 1303.54 | 1304.58 | 1305.63 | nm | |
| Wavelength L3 | $\lambda C3$ | 1308.09 | 1309.14 | 1310.19 | nm | |
| Side-Mode Suppression Ratio | SMSR | 30 | | | dB | |
| Total Average Optical Launch Power | POUT | | | 12.5 | dBm | |
| Average Launch Power Tx Off (Per Lane) | Poff | | | -30 | dBm | |
| Average Optical Launch Power (Per Lane) | POUTL | 2 | | 6.5 | dBm | |
| Extinction Ratio | ER | 6 | | | dB | |
| Spectral Width | $\Delta\lambda$ | | | 1 | nm | |
| Optical Modulation Amplitude (Per Lane) | OMA | 2.5 | | 7 | dBm | |
| Transmitter and Dispersion Penalty (Per Lane) | TDP | | | 2.2 | dB | |
| Launch Power in OMA Minus TDP (Per Lane) | OMA-TDP | 1.5 | | | dBm | |
| Difference in Launch Power Between Any Two Lanes (OMA) | DT_OMA | | | 4 | dB | |
| Optical Return Loss Tolerance | ORLT | | | 20 | dB | |
| RIN _{20OMA} | RIN | | | -130 | dB/Hz | |
| Transmitter Reflectance | RL | | | -26 | dB | |
| Transmitter Eye Mask Definition | IEEE 802.3bs-2010 (0.25, 0.4, 0.45, 0.25, 0.28, 0.4) | | | | | |
| Receiver | | | | | | |
| Wavelength L0 | $\lambda C0$ | 1294.53 | 1295.56 | 1296.59 | nm | |
| Wavelength L1 | $\lambda C1$ | 1299.02 | 1300.05 | 1301.09 | nm | |
| Wavelength L2 | $\lambda C2$ | 1303.54 | 1304.58 | 1305.63 | nm | |
| Wavelength L3 | $\lambda C3$ | 1308.09 | 1309.14 | 1310.19 | nm | |
| Receiver Sensitivity (OMA) Per Lane | | | | -27.5 | dBm | 1 |
| Stressed Receiver Sensitivity in OMA (Per Lane) | | | | TBD | dBm | |
| Stressed Receiver Sensitivity Test Conditions | | | | | | |
| Stressed Eye J2 Jitter (Per Lane) | | | 0.33 | | UI | |
| Stressed Eye J9 Jitter (Per Lane) | | | 0.48 | | UI | |
| Vertical Eye Closure Penalty | | | 2 | | dB | |
| Damage Threshold for Receiver | THd | TBD | | | dBm | |
| Average Receive Power (Per Lane) | | -28 | | -5 | dBm | 1 |
| Receive Power in OMA (Per Lane) Overload | OMA | | | -4.5 | dBm | |
| Receiver Reflectance | RL | | | -26 | dB | |

| | | | | | | |
|----------------|------|-----|--|-----|-----|--|
| LOS Assert | LOSA | -40 | | | dBm | |
| LOS De-Assert | LOSD | | | -30 | dBm | |
| LOS Hysteresis | LOSH | 0.5 | | | dB | |

Notes:

1. Measured with conformance test signal at TP3 for the BER=5x10⁻⁵.

Pin Descriptions


| Pin | Logic | Symbol | Name/Descriptions | Ref. |
|-----|-------------|---------|--|------|
| 1 | | GND | Module Ground. | 1 |
| 2 | CML-I | Tx2- | Transmitter Inverted Data Input. | |
| 3 | CML-I | Tx2+ | Transmitter Non-Inverted Data Input. | |
| 4 | | GND | Module Ground. | 1 |
| 5 | CML-I | Tx4- | Transmitter Inverted Data Input. | |
| 6 | CML-I | Tx4+ | Transmitter Non-Inverted Data Input. | |
| 7 | | GND | Module Ground. | 1 |
| 8 | LVTTTL-I | MODSEIL | Module Select. | |
| 9 | LVTTTL-I | ResetL | Module Reset. | |
| 10 | | VccRx | +3.3v Receiver Power Supply. | 2 |
| 11 | LVC MOS-I | SCL | 2-Wire Serial Interface Clock. | |
| 12 | LVC MOS-I/O | SDA | 2-Wire Serial Interface Data. | |
| 13 | | GND | Module Ground. | 1 |
| 14 | CML-O | Rx3+ | Receiver Non-Inverted Data Output. | |
| 15 | CML-O | Rx3- | Receiver Inverted Data Output. | |
| 16 | | GND | Module Ground. | 1 |
| 17 | CML-O | Rx1+ | Receiver Non-Inverted Data Output. | |
| 18 | CML-O | Rx1- | Receiver Inverted Data Output. | |
| 19 | | GND | Module Ground. | 1 |
| 20 | | GND | Module Ground. | 1 |
| 21 | CML-O | Rx2- | Receiver Inverted Data Output. | |
| 22 | CML-O | Rx2+ | Receiver Non-Inverted Data Output. | |
| 23 | | GND | Module Ground. | 1 |
| 24 | CML-O | Rx4- | Receiver Inverted Data Output. | |
| 25 | CML-O | Rx4+ | Receiver Non-Inverted Data Output. | |
| 26 | | GND | Module Ground. | 1 |
| 27 | LVTTTL-O | ModPrsL | Module Present. Internally pulled down to GND. | |
| 28 | LVTTTL-O | IntL | Interrupt output. Should be pulled up on the host board. | |
| 29 | | VccTx | +3.3v Transmitter Power Supply. | 2 |
| 30 | | Vcc1 | +3.3v Power Supply. | 2 |

| | | | | |
|----|----------|--------|--------------------------------------|---|
| 31 | LVTTTL-I | LPMoDe | Low-Power Mode. | |
| 32 | | GND | Module Ground. | 1 |
| 33 | CML-I | Tx3+ | Transmitter Non-Inverted Data Input. | |
| 34 | CML-I | Tx3- | Transmitter Inverted Data Input. | |
| 35 | | GND | Module Ground. | 1 |
| 36 | CML-I | Tx1+ | Transmitter Non-Inverted Data Input. | |
| 37 | CML-I | Tx1- | Transmitter Inverted Data Input. | |
| 38 | | GND | Module Ground. | 1 |





Notes:

1. GND is the symbol for signal and supply (power) common for the QSFP28 module. All are common within the QSFP28 module and all module voltages are referenced to this potential unless otherwise noted. Connect these directly to the host board signal-common ground plane. Open collector. Should be pulled up with 4.7kΩ-10kΩ on the host board to a voltage between 3.15V and 3.6V.
2. VccRx, Vcc1, and VccTx are the receiver and transmitter power supplies and shall be applied concurrently. VccRx, Vcc1, and VccTx may be internally connected within the QSFP28 module in any combination. The connector pins are each rated for a maximum current of 1000mA.

Electrical Pin-Out Details

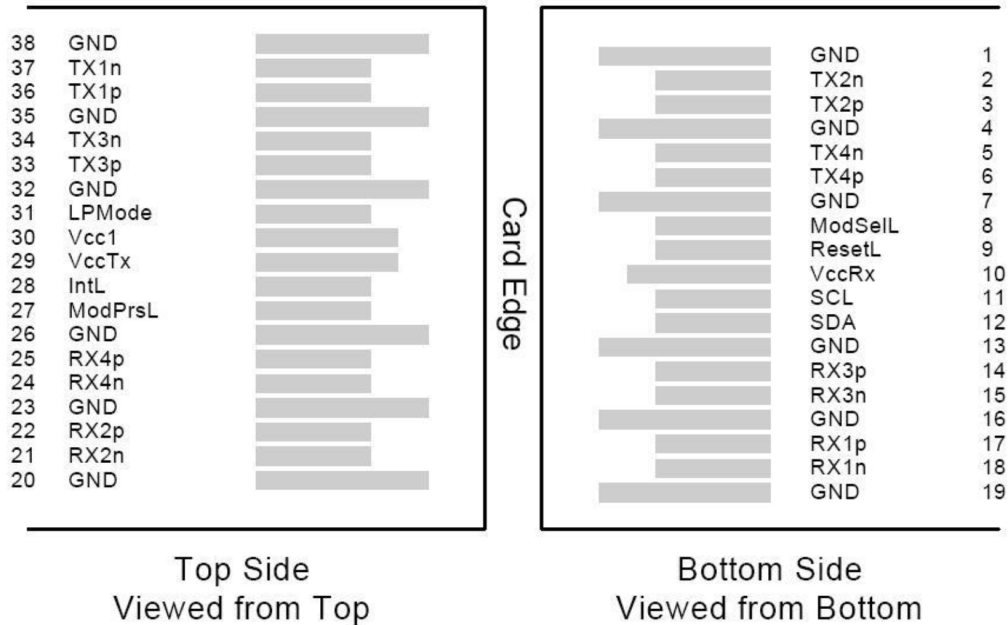

Mechanical Specifications

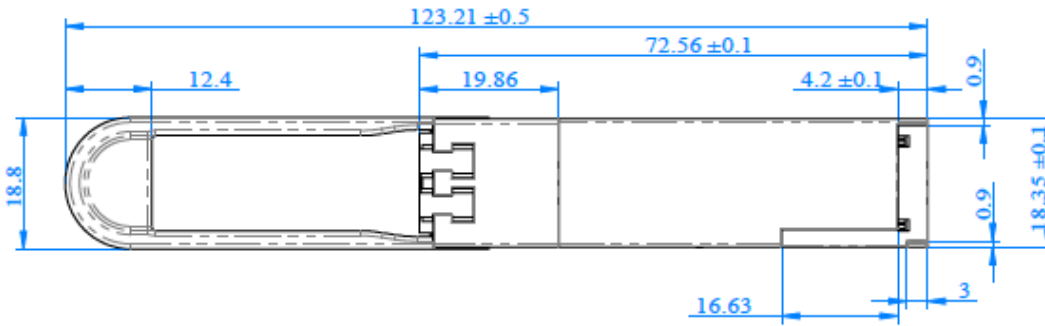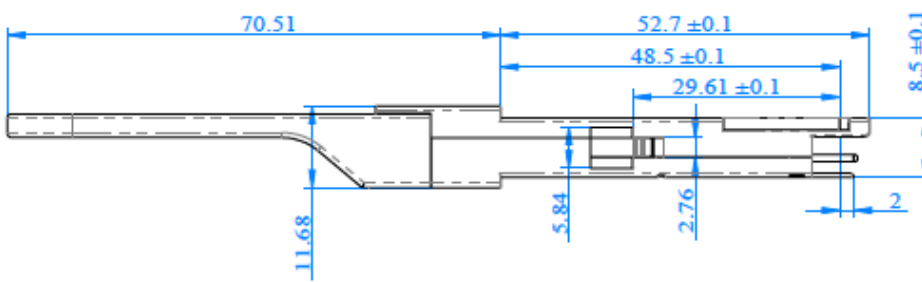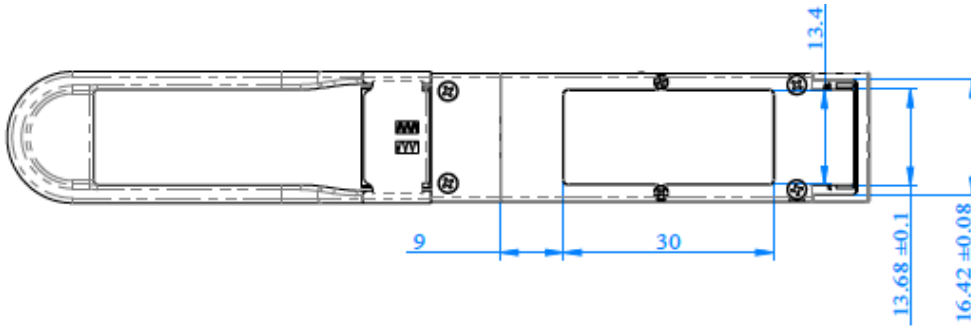

About ProLabs

Our experience comes as standard; for over 15 years ProLabs has delivered optical connectivity solutions that give our customers freedom and choice through our ability to provide seamless interoperability. At the heart of our company is the ability to provide state-of-the-art optical transport and connectivity solutions that are compatible with over 90 optical switching and transport platforms.

Complete Portfolio of Network Solutions

ProLabs is focused on innovations in optical transport and connectivity. The combination of our knowledge of optics and networking equipment enables ProLabs to be your single source for optical transport and connectivity solutions from 100Mb to 400G while providing innovative solutions that increase network efficiency. We provide the optical connectivity expertise that is compatible with and enhances your switching and transport equipment.

Trusted Partner

Customer service is our number one value. ProLabs has invested in people, labs and manufacturing capacity to ensure that you get immediate answers to your questions and compatible product when needed. With Engineering and Manufacturing offices in the U.K. and U.S. augmented by field offices throughout the U.S., U.K. and Asia, ProLabs is able to be our customers best advocate 24 hours a day.

Contact Information

ProLabs US

Email: sales@prolabs.com

Telephone: 952-852-0252

ProLabs UK

Email: salesupport@prolabs.com

Telephone: +44 1285 719 600