


REV	DESCRIPTION	DATE	APP
00	NEW DRAWING	10/12/18	

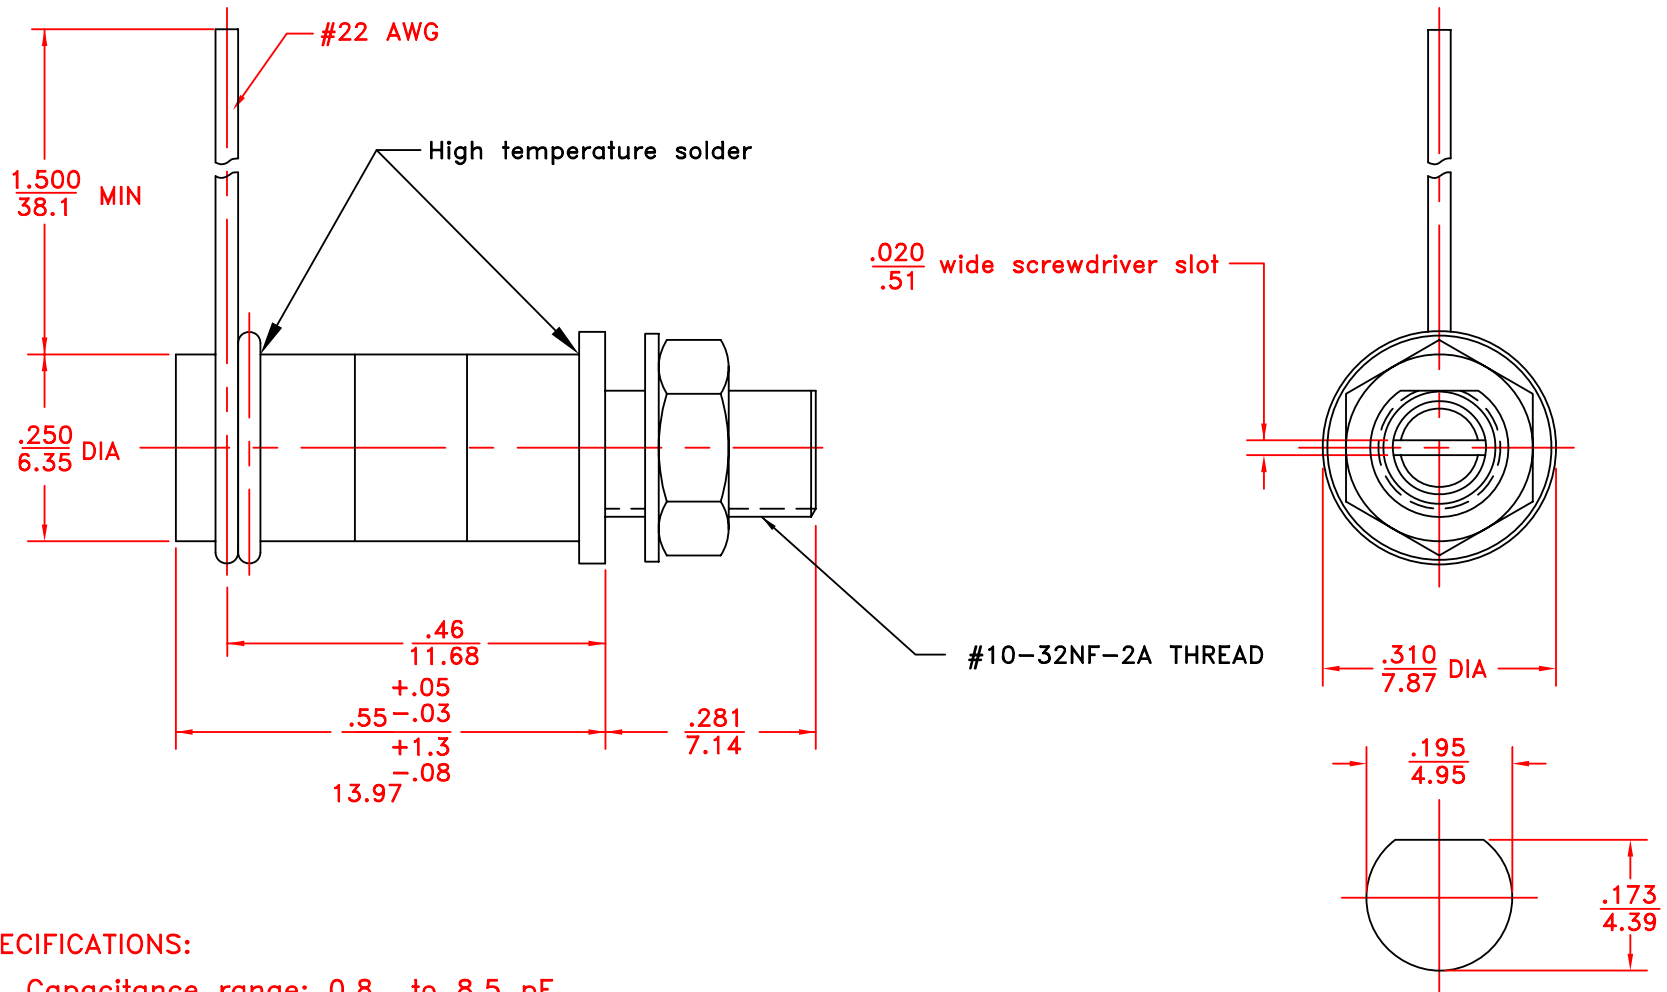

SIGGESTED MOUNTING PANEL HOLE

**SPECIFICATIONS:**

1. Capacitance range: 0.8 to 8.5 pF.
2. Working voltage: 750 VDC.
3. Dielectric Withstanding Voltage: 1500 VDC.
4. Operating Temperature Range: -55 to +125°C.
5. Insulation Resistance: 10<sup>5</sup> Mohms.
6. Q min at 20 MHz - 500
7. Temperature Coefficient: ±50 ppm/°C.
8. Torque: 1.0 to 10.0 oz-in
9. Dimensions ( in/mm ).
10. Construction: not sealed

TOLERANCES: (EXCEPT AS NOTED)				SPRAGUE GOODMAN ELECTRONICS INC. 1700 SHAMES DRIVE WESTBURY, NY 11590			
DECIMAL: ±0.005 in ±0.13 mm		MATERIAL:		SCALE: 4:1		DRAWN BY: R. LEVIN	
FRACTIONAL: 1/64		TITLE: PISTONCAP CAPACITOR				APPROVED: I. DITLYA	
ANGULAR: 1°		DATE: 10/12/18		DRAWING NUMBER GSG113A		USED FOR: REV. 00	