

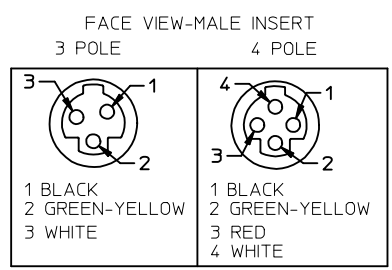
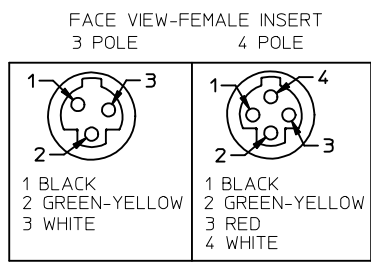


| POLES | MATERIAL NO. | ENG. NO. | AMPS | LENGTH |
|-------|--------------|---------------|------|--------------------------|
| 3 | 1300640401 | CC3130A48M020 | 32 | 2M +89-0MM (6'7"+3.50-0) |
| 4 | 1300640356 | CC4130A48M020 | 32 | 2M +89-0MM (6'7"+3.50-0) |

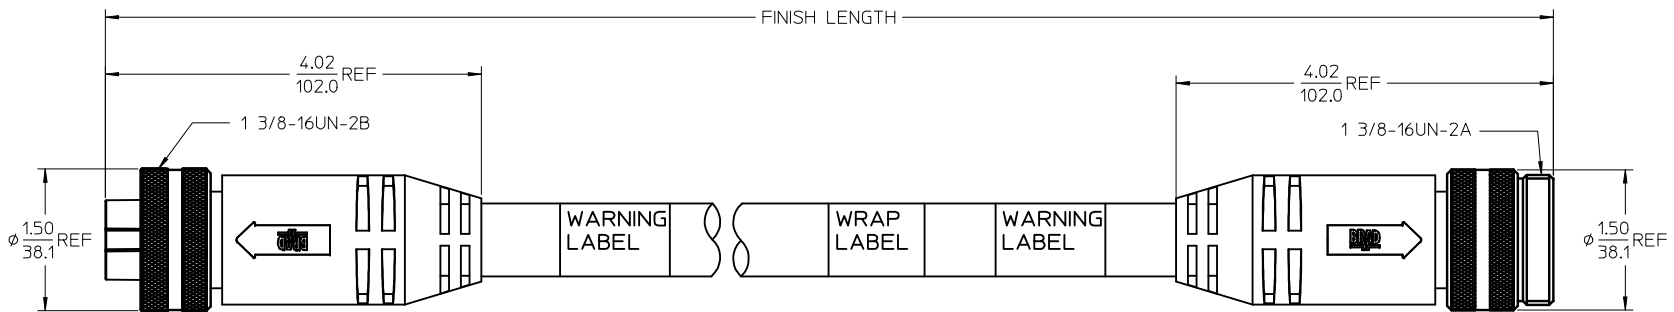

SPECS:
 OVERMOLD: GRAY PVC
 INSERT: BLACK PVC
 COUPLING NUT: ANODIZED ALUMINUM
 CABLE: #10AWG GRAY PVC
 DUAL RATED UL TC/OPEN WIRING & STOOO
 ELECTRICAL: 600V AC/DC

| | | | | | | | |
|---|---------------------|--|--|----------------------------------|--------------------------------------|-----------------------------|------------------------|
| UPDATED PROFILE EC NO: IPG2014-1160 DRWNGGUSTAFSON 2013/12/26 CHKD:VOU 2014/01/15 APPR:WOODMAN 2014/05/12 | QUALITY SYMBOLS | GENERAL TOLERANCES (UNLESS SPECIFIED) | | DIMENSION STYLE IN/MM | SCALE 1:1 | DESIGN UNITS INCH | THIRD ANGLE PROJECTION |
| | | 4 PLACES ± --- ± --- 3 PLACES ± --- ± .005 2 PLACES ± --- ± .010 1 PLACE ± --- ± .020 ANGULAR ± 1/2° | mm INCH ± --- ± --- ± .005 ± .010 ± .020 | DRAWN BY B. RUPERT | DATE 01/12/10 | CHECKED BY B. WOODMAN | DATE 01/12/10 |
| REV B | DESCRIPTION | DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS | | APPROVED BY JFMURPHY | DATE 2010/01/15 | MOLEX INCORPORATED | |
| | | | | MATERIAL NO. SEE CHART | DOCUMENT NO. SD-130064-401 | SHEET NO. 1 OF 1 | |
| THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION | | | | | | | |