

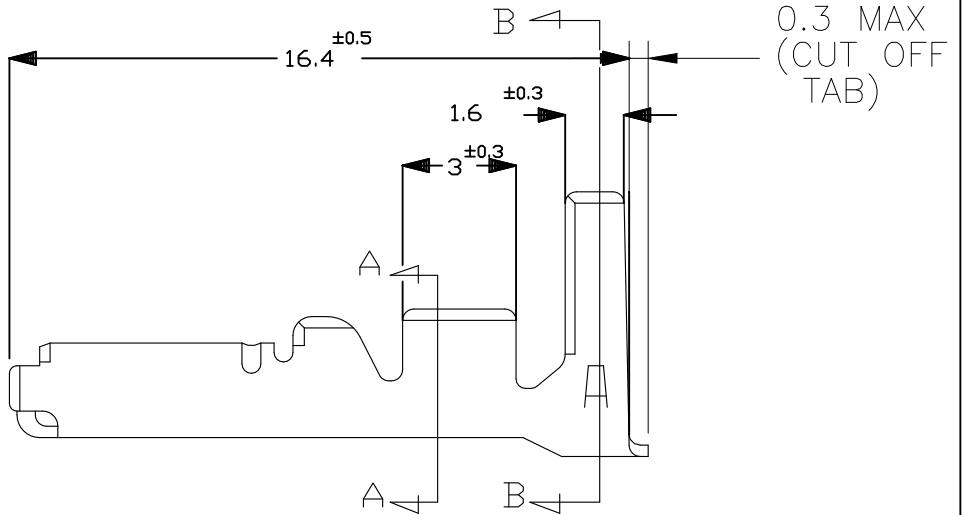
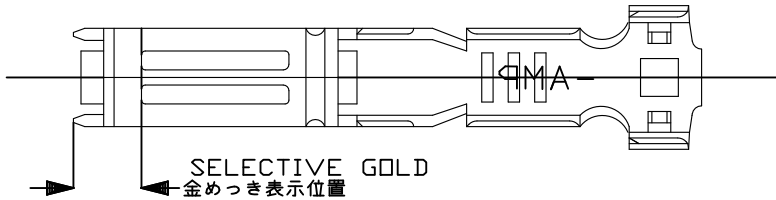


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B1	REVISED PER ECR-23-165252	01FEB2023	RK	MT




NOTE.1  
 1.PLUG HSG ;  
 174147etc  
 2.STRIP PART NO. ;  
 (MAKE FROM)  
 173708  
 3.SPEC ;  
 114-5109 ,108-5244

△ 4 OBSOLETE



SECT A-A

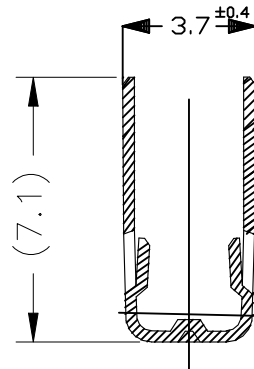

SECT B-B

- 注：  
 1.適用相手ハウジング型番：174147他  
 2.連鎖状端子型番：173708  
 3.圧着規格：114-5109  
 製品規格：108-5244

GENERAL TOLERANCE

0 < \* ≤ 10 : ±0.2  
 10 < \* ≤ 30 : ±0.25  
 30 < \* ≤ 100 : ±0.3  
 ANGLES : ±3°

WIRE RANGE	INSULATION DIA.
0.5~2 mm2(AWG#20 - #14)	2.0~3.1 mmφ

△ 4	IS-422J	911771-1	SELECTIVE GOLD 部分金めっき	KLF-5 t0.3 リン青銅 板厚0.3	175081-2
	IS-422J	911771-1	PRE-TINNED 錫めっき済	KLF-5 t0.3 リン青銅 板厚0.3	175081-1
IS NO.	HAND TOOL NO. 適用手動工具 PN	FINISH 仕上げ	MATERIAL 材料	PART NUMBER 型番	

DIMENSIONS: mm	DWN T.SAGAWA	7/3'88	MATERIAL	SEE TABLE	FINISH	SEE TABLE
	CHK -	7/12'88	TE Connectivity .070 SERIES RECEPTACLE CONTACT (L/P)			
TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD M.NOSUCHI	7/20'88				
0 PLC ± -	PRODUCT SPEC	-	NAME	.070 SERIES RECEPTACLE CONTACT (L/P)		
1 PLC ± -	APPLICATION SPEC	-	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
2 PLC ± -	WEIGHT	-	A4	00779	C-175081	-
3 PLC ± -			CUSTOMER DRAWING			
4 PLC ± -			SCALE	5:1	SHEET	1 OF 1
ANGLES ± -						REV B1