



American Opto Plus LED

L-513MEC-36D

5mm Dia LED LAMP - WATER CLEAR


- ◆ 5.0mm DIA LED LAMP
- ◆ I.C. COMPATIBLE
- ◆ LOW POWER CONSUMPTION
- ◆ HIGH LUMINOUS INTENSITY

DESCRIPTION

- Super bright LED Lamp
- Round type
- T1-3/4 (5mm) diameter
- Lens color: Water clear
- With flange
- Solder leads without stand-off

FEATURES

- Emitted color: Super Red
- High luminous intensity
- Technology: AlGaInP
- Dominant wavelength $\lambda_p = 630\text{nm}$
- Viewing angle: 36°

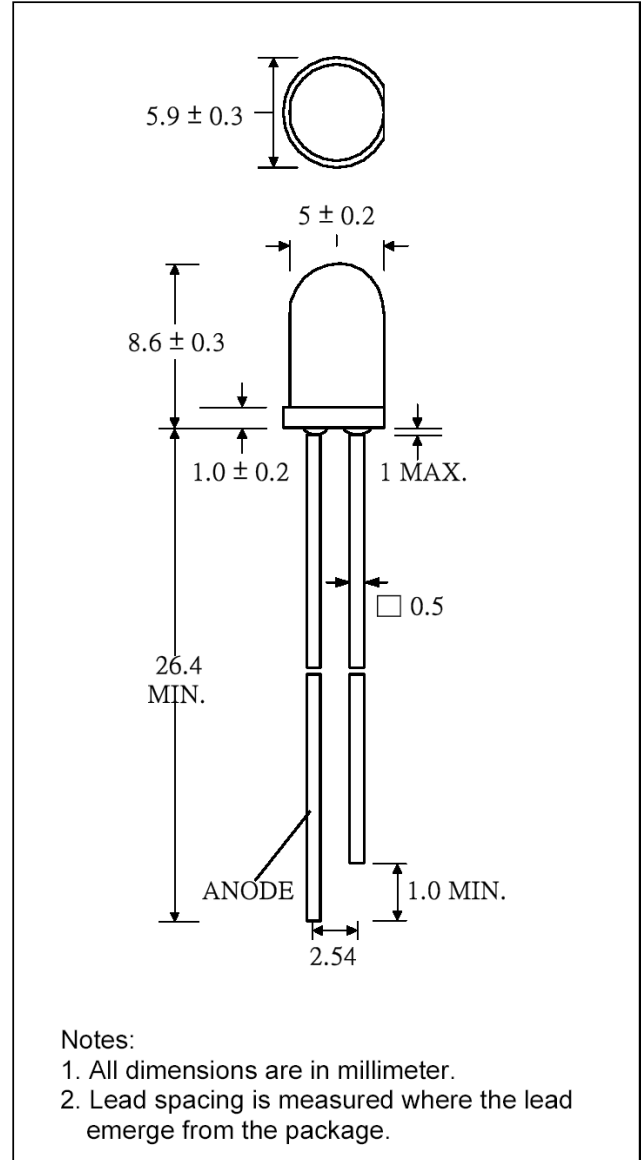

SELECTION GUIDE

Chip Material	Chip Emitted	Lens Color	Viewing Angle
AlGaInP	Super Red	Water Clear	36°



American Opto Plus LED
L-513MEC-36D
5mm Dia LED LAMP - WATER CLEAR

- ◆ 5.0mm DIA LED LAMP
- ◆ I.C. COMPATIBLE
- ◆ LOW POWER CONSUMPTION
- ◆ HIGH LUMINOUS INTENSITY

ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

Parameter	Symbol	Max Rating	Unit
Power Dissipation	P_D	120	mW
Pulse Forward Current (1/10 Duty Cycle @1KHz)	I_{PF}	100	mA
Continuous Forward Current	I_F	50	mA
Reverse Voltage	V_R	5.0	V
Operating Temperature Range	T_{OPR}	-40~+85	°C
Storage Temperature Range	T_{STG}	-40~+85	°C

Solder temperature 1.6 mm from body for 5 seconds at 260°C

OPTICAL-ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Luminous Intensity	I_v	$I_F = 20mA$	6000	9000		mcd
Forward Voltage	V_F	$I_F = 20mA$		2.0	2.4	V
Reverse Current	I_R	$V_R = 5V$			10	uA
Viewing Angle	2θ1/2	$I_F = 20mA$		30		deg.
Peak Wavelength	λ_P	$I_F = 20mA$		630		deg.
Dominant Wavelength	λ_D	$I_F = 20mA$		629		deg.
Spectrum Radiation Bandwidth	$\Delta\lambda$	$I_F = 20mA$		20		nm




American Opto Plus LED

L-513MEC-36D


5mm Dia LED LAMP - WATER CLEAR

- ◆ 5.0mm DIA LED LAMP
- ◆ I.C. COMPATIBLE
- ◆ LOW POWER CONSUMPTION
- ◆ HIGH LUMINOUS INTENSITY


TYPICAL ELECTRO-OPTICAL CHARACTERISTIC CURVES

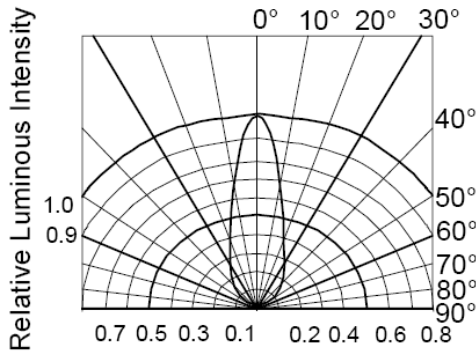


RADIATION DIAGRAM

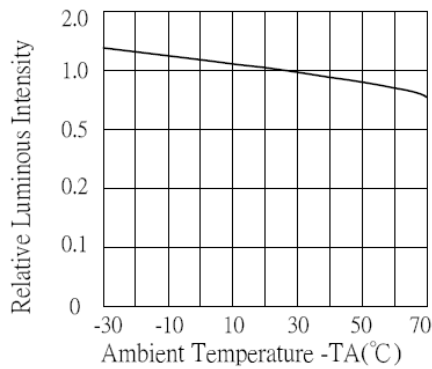


**LUMINOUS INTENSITY
Vs. AMBIENT TEMPERATURE**

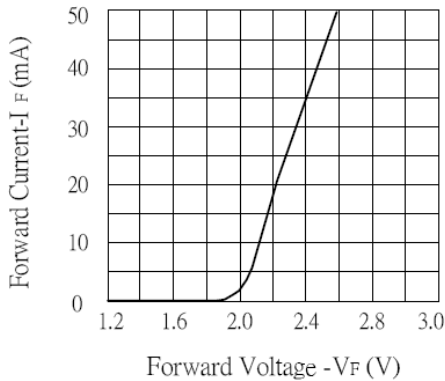


**FORWARD CURRENT
Vs. FORWARD VOLTAGE**

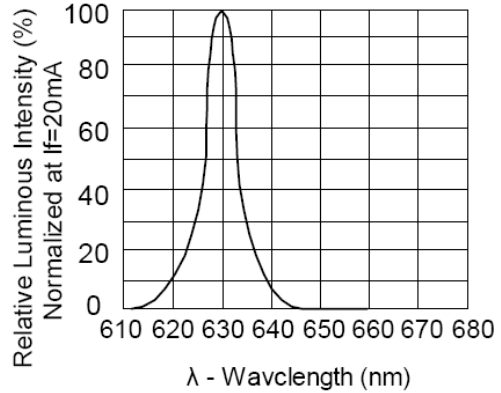

**RELATIVE LUMINOUS INTENSITY
Vs. WAVELENGTH**

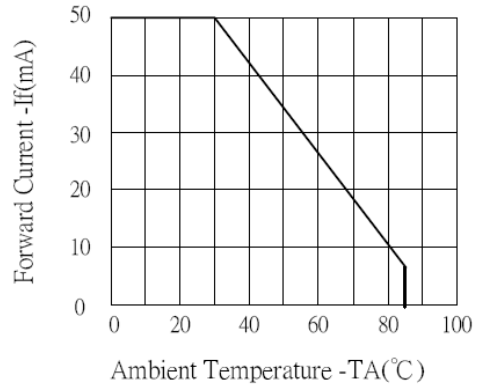

**FORWARD CURRENT
Vs. AMBIENT TEMPERATURE**

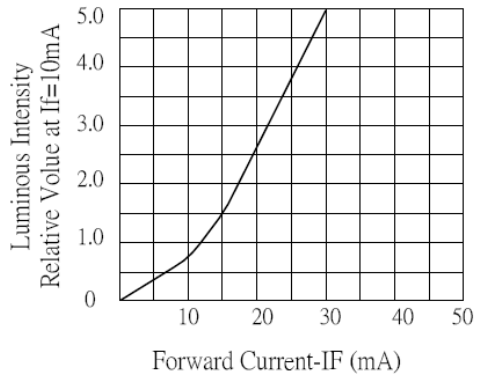

**LUMINOUS INTENSITY
Vs. FORWARD CURRENT**



American Opto Plus LED
L-513MEC-36D
5mm Dia LED LAMP - WATER CLEAR

- ◆ 5.0mm DIA LED LAMP
- ◆ I.C. COMPATIBLE
- ◆ LOW POWER CONSUMPTION
- ◆ HIGH LUMINOUS INTENSITY

ELECTRICAL CHARACTERISTICS

(Ta=25°C)

Symbol	I_V		V_F		λ_D	
Parameter	Luminous Intensity		Forward Voltage		Dominant Wavelength	
Condition	$I_F = 20\text{mA}$		$I_F = 20\text{mA}$		$I_F = 20\text{mA}$	
Unit	mcd		v		nm	
Binning	Grade	Range	Grade	Range	Grade	Range
	Bin 1	7800 – 10140	T	1.7 – 1.9	B	620 – 625
	Bin 3	10140 – 13200	U	1.9 – 2.1	C	625 – 630
			V	2.1 – 2.3		
			W	2.3 – 2.5		

Intensity: Tolerance of minimum and maximum = $\pm 15\%$

V_F : Tolerance of minimum and maximum = $\pm 0.05\text{v}$

Wavelength: Tolerance of minimum and maximum = $\pm 2\text{nm}$