


Alle Rechte vorbehalten/ All rights reserved

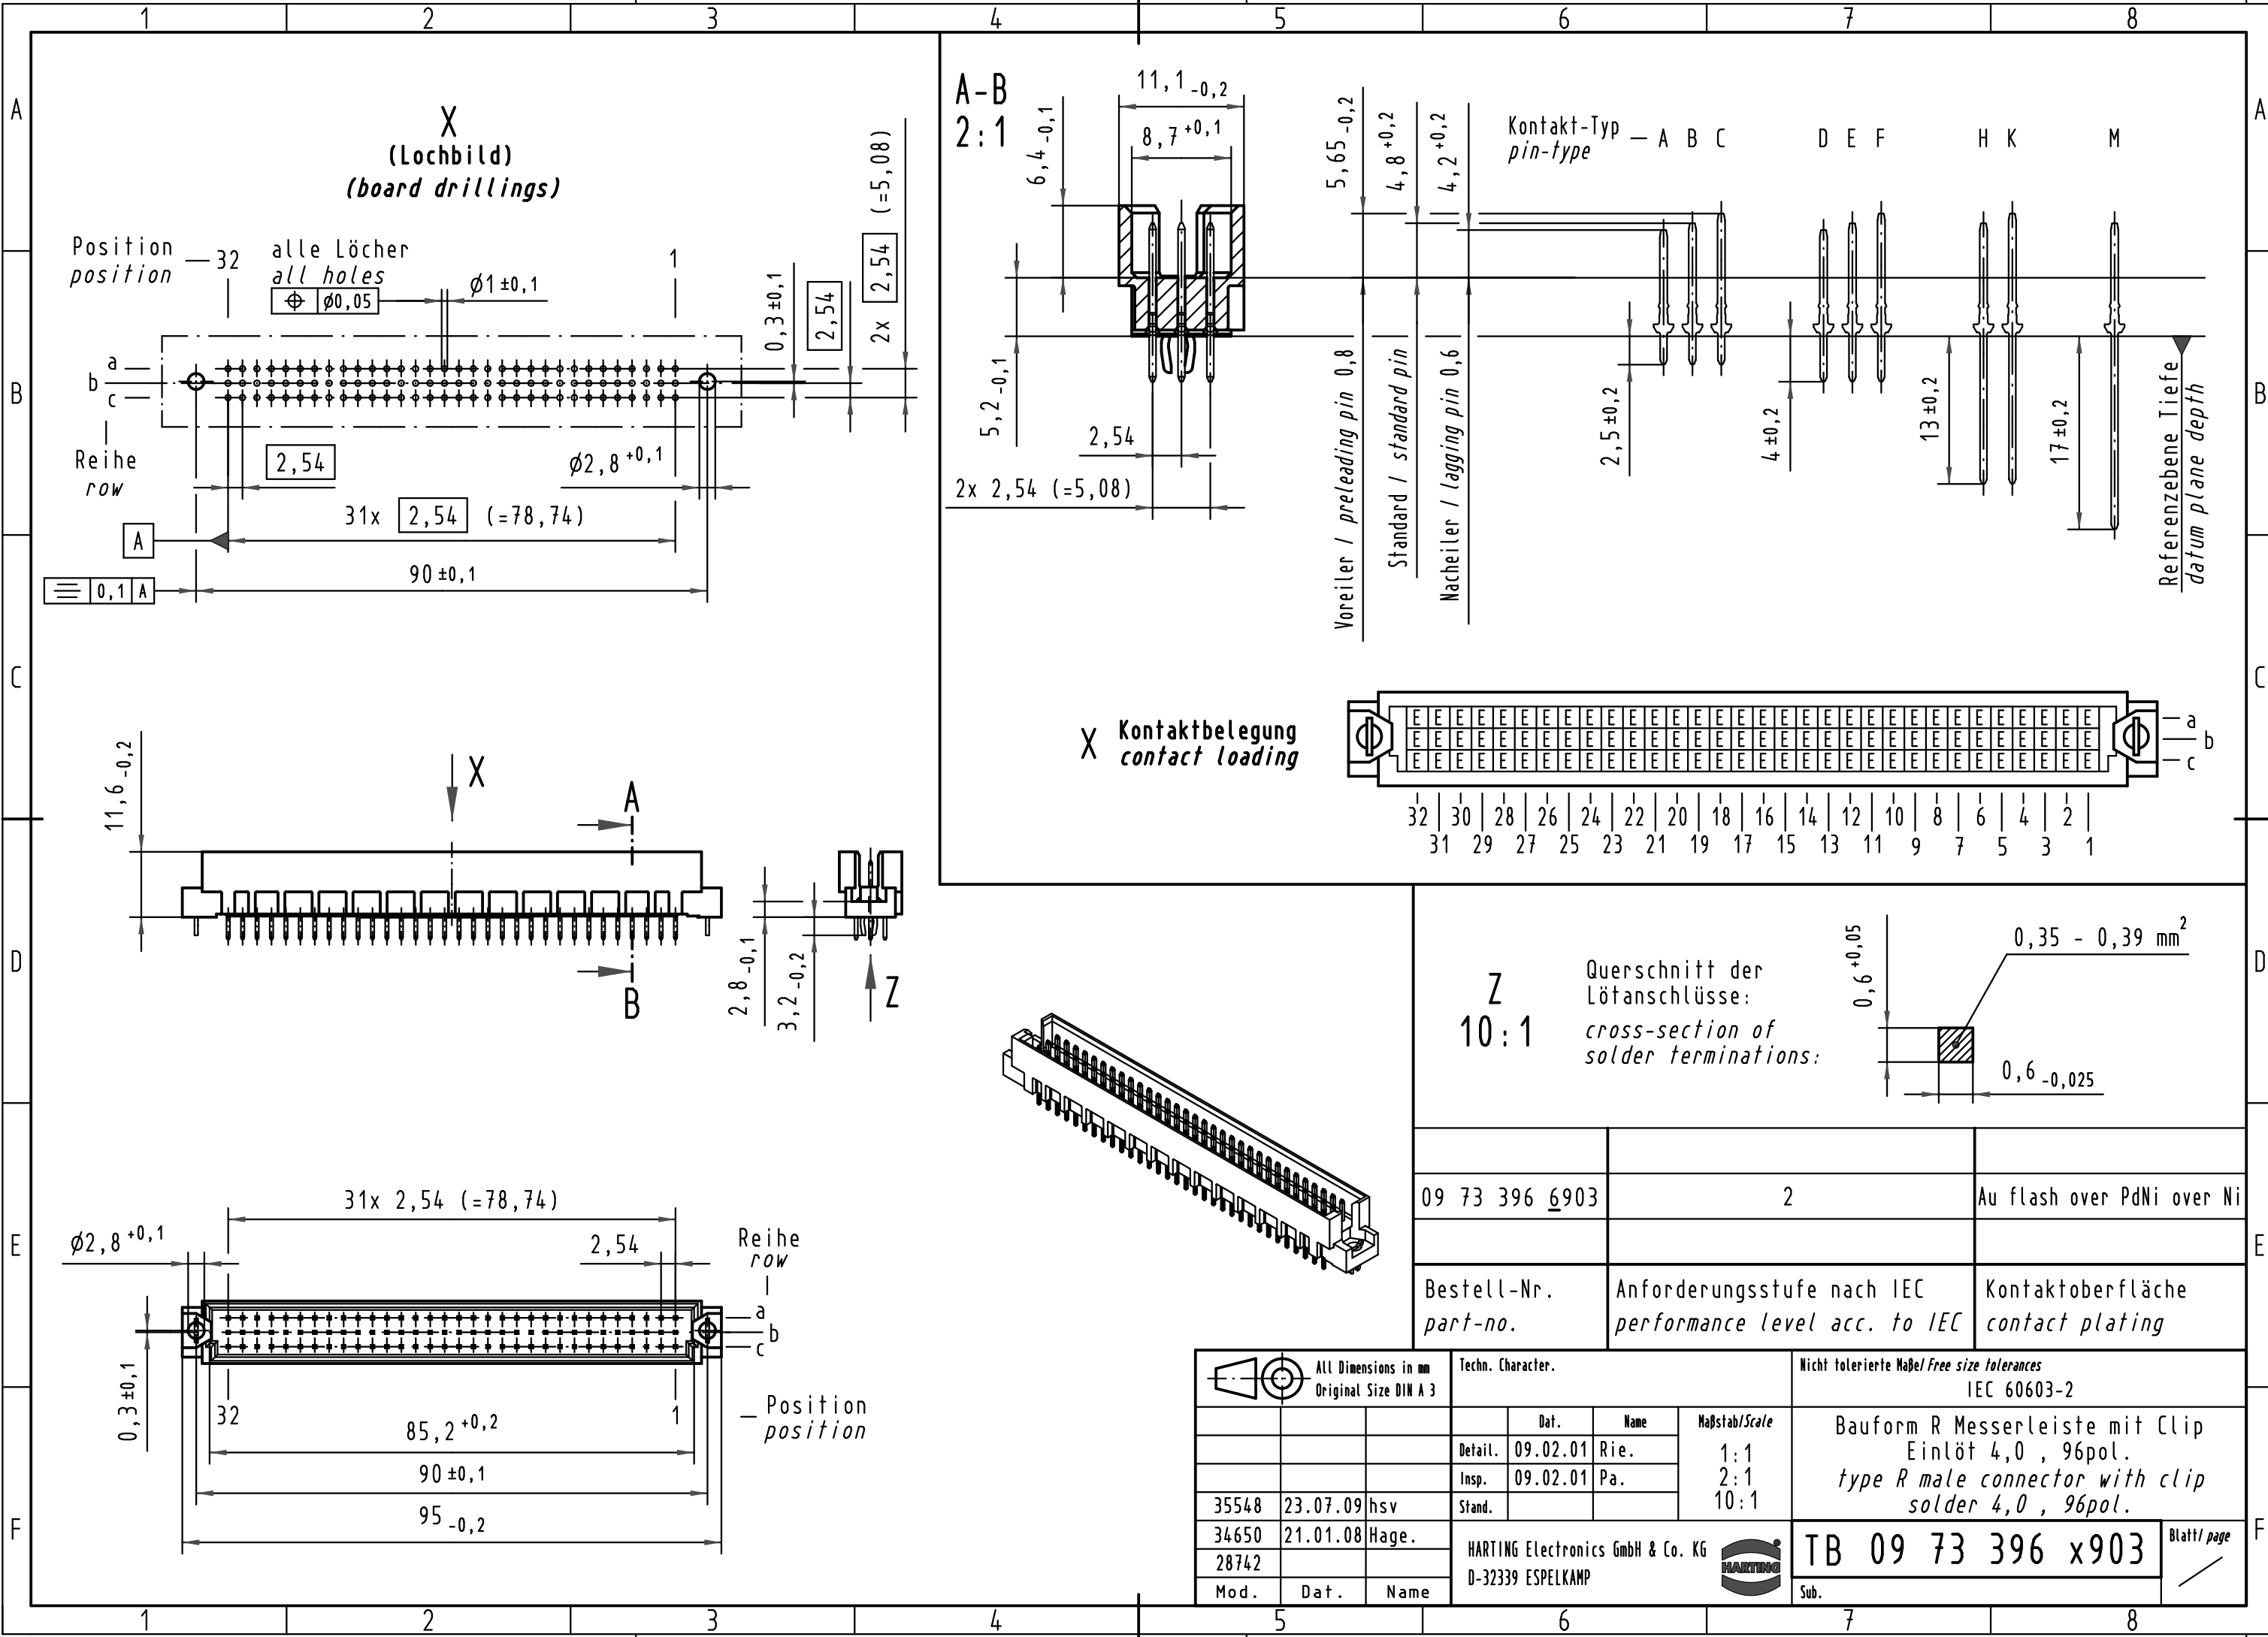

X
(Lochbild)
(board drillings)

A-B
2:1

Kontakt-Typ — A B C D E F H K M
pin-type

X Kontaktbelegung
contact loading

Z
10:1

Querschnitt der
Lötanschlüsse:
cross-section of
solder terminations:

32 | 30 | 28 | 26 | 24 | 22 | 20 | 18 | 16 | 14 | 12 | 10 | 8 | 6 | 4 | 2 |
31 | 29 | 27 | 25 | 23 | 21 | 19 | 17 | 15 | 13 | 11 | 9 | 7 | 5 | 3 | 1

09 73 396 6903

2

Au flash over PdNi over Ni

Bestell-Nr.
part-no.

Anforderungsstufe nach IEC
performance level acc. to IEC

Kontaktoberfläche
contact plating

All Dimensions in mm
Original Size DIN A 3

Techn. Character.

Nicht tolerierte Maß/Free size tolerances
IEC 60603-2

35548	23.07.09	hsv			
34650	21.01.08	Hage.			
28742					
Mod.	Dat.	Name			

Detail.	09.02.01	Rie.	Maßstab/Scale 1:1 2:1 10:1
Insp.	09.02.01	Pa.	
Stand.			

Bauform R Messerleiste mit Clip
Einlöt 4,0 , 96pol.
type R male connector with clip
solder 4,0 , 96pol.

HARTING Electronics GmbH & Co. KG
D-32339 ESPELKAMP

TB 09 73 396 x903 Blatt/ page