



S21 TRANS LOG MAG.  
▶ 0.000 dB 0.200 dB/DIV

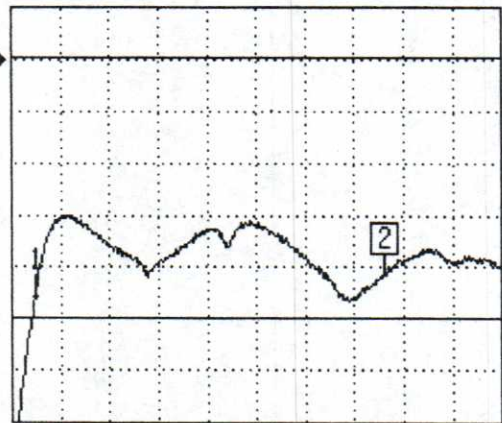


4.500000000 GHz 15.000000000

S11 REFL LOG MAG.  
▶ 0.000 dB 5.000 dB/DIV

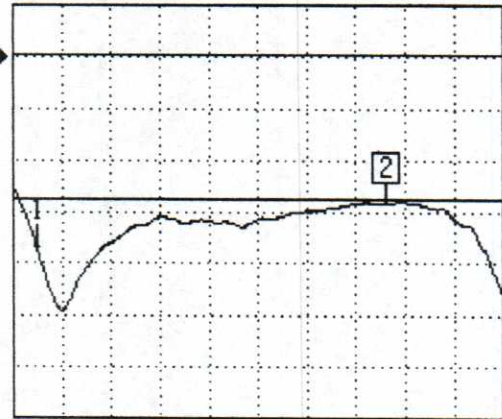


4.500000000 GHz 15.000000000

S22 REFL LOG MAG.  
▶ 0.000 dB 5.000 dB/DIV

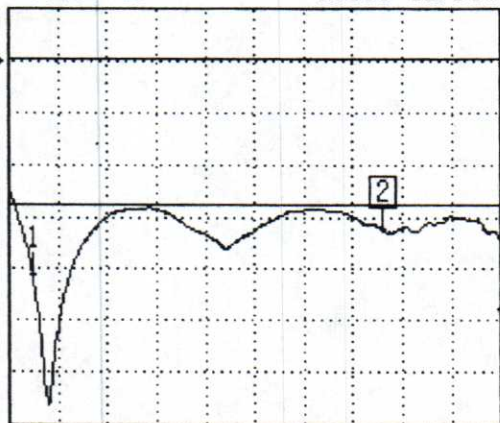

4.500000000 GHz 15.000000000

S12 TRANS LOG MAG.  
▶ 0.000 dB 5.000 dB/DIV

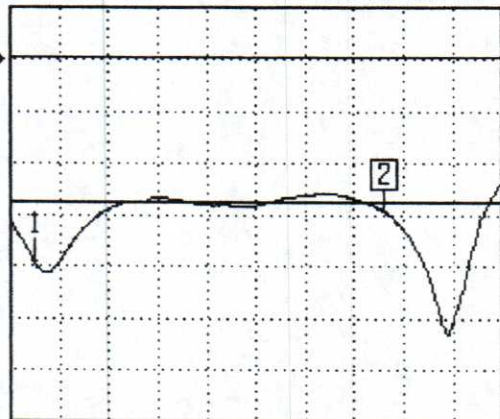

4.500000000 GHz 15.000000000

CH 1 - S21  
0.0000 mm REF  
0.000 dB OFFSET  
0.00° OFFSET

MARKER 2  
12.506250000 GHz  
-0.831 dB

MARKER TO MAX  
▶ MARKER TO MIN

1 5.025000000 GHz  
-0.922 dB

MARKER READOUT  
FUNCTIONS

D3I5015- Isolator  
5.00 - 15.00 GHz  
Isolation: 14 dB Min  
Insertion Loss: 1.0 dB Max  
VSWR: 1.50:1 Max