


Data sheet | Item number: 787-976

Transformer power supply; Input voltage: 230 VAC; Output voltage: 12 ... 24 VAC; Output power: 63 VA



www.wago.com/787-976

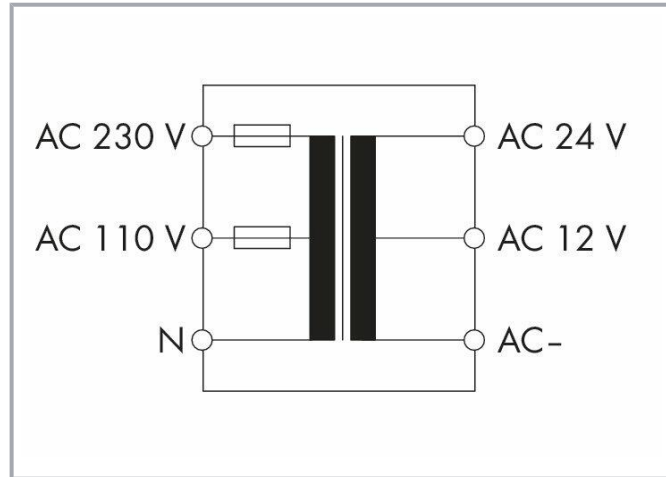

Item description

Features:

- Maintenance-free, DIN-rail-mount safety transformer for 12/24 VAC
- Center tap-off modules provide variable input/output voltage.
- Enables brief performance peaks
- Peak output power of 70 VA for 1 min/h

Data

Technical data

Input

Phases	1
Nominal input voltage $U_{i\text{nom}}$	1 x AC 115 V; AC 230 V
Input voltage range	1 x AC 0 ... 230 V
Nominal mains frequency range	50 ... 60 Hz

Output

Nominal output voltage $U_{o\text{nom}}$	AC 12 / 24 V
--	--------------

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Nominal output current $I_{o\text{ nom}}$	5.2 A (115 VAC); 2.6 A (230 VAC)
Overload behavior	Safety fuse in the primary circuit

Efficiency/power losses

Power loss P_l	≤ 0.8 W
------------------	--------------

Circuit protection

Internal fuse	T 2 A / 250 VAC; T 1.6 A / 250 VAC
---------------	------------------------------------

Safety and protection

Isolation voltage (AC)	AC 4.2 kV
Protection class	II
Protection type	IP20; per EN 60529
Overvoltage category	III
Pollution degree	2
Short-circuit-protected	Yes
Open-circuit-proof	Yes
Parallel operation	No
Series operation	Yes (with identical power supply)

Connection data

Connection type 1	Input/Output
Connection technology	CAGE CLAMP®
WAGO connector	WAGO 236 Series
Solid conductor	0.08 ... 2.5 mm ² / 28 ... 12 AWG
Fine-stranded conductor	0.08 ... 2.5 mm ² / 28 ... 12 AWG
Strip length	5 ... 6 mm / 0.2 ... 0.24 inches

Physical data

Width	144 mm / 5.669 inches
Height	90 mm / 3.543 inches
Depth from upper-edge of DIN-rail	54 mm / 2.126 inches

Mechanical Data

Mounting type	DIN-35 rail
---------------	-------------

Subject to changes. Please also observe the further product documentation!



Material Data

Weight	1200 g
--------	--------

Environmental requirements

Ambient temperature (operation)	-25 ... +55 °C
Ambient temperature (storage)	-25 ... +85 °C
Relative humidity	90%

Standards and specifications

Conformity marking	CE
Standards/specifications	UL 5085 EN 61558-2-6

Commercial data

eCl@ss 10.0	27-04-07-03
eCl@ss 9.0	27-04-07-03
ETIM 8.0	EC002541
ETIM 7.0	EC002541
PU (SPU)	1 pcs
Packaging type	box
Country of origin	CN
GTIN	4055143487399
Customs tariff number	85043129900

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
SCIP notification number (Bulgaria)	36f2e601-e1fa-4685-aae5-a2cf8816205d
SCIP notification number (Czech Republic)	bb350a9e-0166-4369-bbaf-2507f6407afe

Approvals / Certificates

General approvals

Logo	Approval	Additional Approval Text	Certificate name
	EAC Brjansker Zertifizierungsstelle	TP TC 004/2011	EAC RU C-DE.AM02.B.00122

Subject to changes. Please also observe the further product documentation!




UL
Underwriters Laboratories Inc.

UL 5085-1/-2

E488057

Declarations of conformity and manufacturer's declarations

Logo	Approval	Additional Approval Text	Certificate name
	EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-

Optional accessories

Tool

Operating tool



Item no.: 210-720
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

www.wago.com/210-720

Marking accessories

Marking strip



Item no.: 210-831
Marking strips; on reel; 2.3 mm wide; plain; Self-adhesive; white

www.wago.com/210-831



Item no.: 210-832
Marking strips; on reel; 3 mm wide; plain; Self-adhesive; white

www.wago.com/210-832

Downloads

Documentation

Bid Text

787-976 X81 - Datei	2019 Feb 19	xml 5.0 kB	Download
787-976 doc - Datei	2016 Nov 24	doc 33.8 kB	Download

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Instruction Leaflet

Sicherheitstransformator 63 VA	V 1.1.0	pdf 2.3 MB	Download
-----------------------------------	---------	---------------	----------

Additional Information

Disposal and Recycling Electrical and electronic equipment, Batteries, Packaging	V 1.1.0 2022 Aug 18	pdf 2.2 MB	Download
---	------------------------	---------------	----------

CAD/CAE-Data

CAE data

EPLAN Data Portal 787-976	URL	Download
ZUKEN Portal 787-976	URL	Download

CAD data

2D/3D Models 787-976	URL	Download
----------------------	-----	----------

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 787-976 Transformer power supply; Input voltage: 230 VAC; Output voltage: 12 ... 24 VAC; Output power: 63 VA	URL	Download
---	-----	----------

Installation Notes

Subject to changes. Please also observe the further product documentation!