


# VS-PP-R-8XRJ45/5-LSA

Order No.: 1654895



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1654895>

RJ45 patch panel, DIN rail mounting, IP20, eight slots, LSA connection, CAT5e, shielding over jumper can be selected

| Commercial data          |  |
|--------------------------|--|
| GTIN (EAN)               |  |
| sales group              | D552   |
| Pack                     | 1 pcs.   |
| Customs tariff           | 85366990   |
| Catalog page information | Page 198 (PC-2009)   |

### Product notes

WEEE/RoHS-compliant since: 12/11/2006



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Technical data

| Mechanical characteristics  |   |
|-----------------------------|---|
| Number of positions         | 8   |
| Number of slots             | 8   |
| Insertion/withdrawal cycles | ≥ 200   |
| Type of connection          | LSA-PLUS  |
| Conductor cross-section     | 0.14 mm <sup>2</sup> ... 0.34 mm <sup>2</sup> (solid) |

|                                 |                   |
|---------------------------------|-------------------|
| Connection cross-section AWG    | 26 ... 22 (solid) |
| External cable diameter         | 5 mm ... 8.5 mm   |
| Color                           | green             |
| Ambient temperature (operation) | 0 °C ... 70 °C    |

**Material data**

|                                    |                  |
|------------------------------------|------------------|
| Inflammability class acc. to UL 94 | V0               |
| Housing material                   | PC               |
| Contact carrier material           | PBT              |
| Contact material                   | Copper alloy     |
| Contact surface material           | Gold over nickel |
| Degree of protection               | IP20             |

**Electrical characteristics**


|   |  |
|---|--|
| Number of positions                     | 8  |
| Transmission characteristics (category) | CAT5 (IEC 11801:2002), CAT5e (TIA 568B:2001) |
| Rated current                           | 1 A  |

**Accessories**

| Item           | Designation          | Description  |
|----------------|----------------------|--|
| <b>General</b> |                      |  |
| 2765505        | CT-WZ/A              | Split-core tool for connecting cables to LSA-Plus strips         |
| <b>Tools</b>   |                      |  |
| 1657407        | VS-CABLE-STRIP-VARIO | Stripping tool, for the multi-level stripping of shielded cables |

**Diagrams/Drawings**

Dimensioned drawing

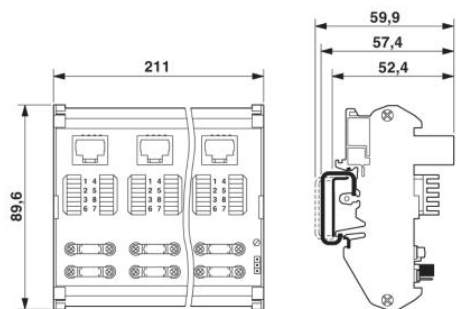

Patch panel with eight RJ45 connections

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact  
Technical modifications reserved;