

Chip Monolithic Ceramic Capacitor

**Electrical Characteristics Data**

**0402 X5R 0.15 uF 10V (0402X154K100CT)**

1. Dimension



Size Inch (mm)	L (mm)	W (mm)	T (mm)
0402 (1005)	1.00±0.05	0.50±0.05	0.50±0.05


2. Cap, DF, IR @25°C

(Cap, DF @1KHz, 1Vrms ; IR @10V, 120sec)

Item	Spec
Cap [uF]	0.15(±10%)
DF	≤ 5%
IR [G-ohm]	≥ 3.34


3. Impedance/ESR-Frequency

(Equipment: 4294A)

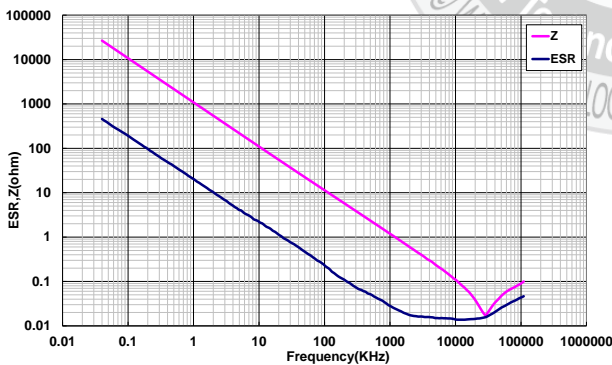

4. Capacitance – Temperature Characteristics


(Equipment: 4284A)

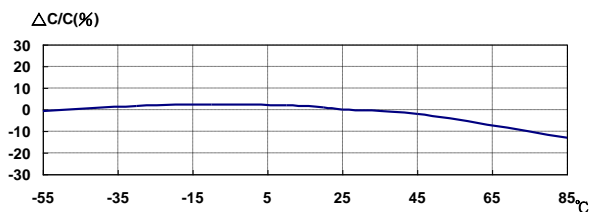

5. Capacitance – DC Voltage Characteristics

(Equipment: 4980A; DC charge 60±5sec)

5V : -17.55% ; 10V : -47.67%

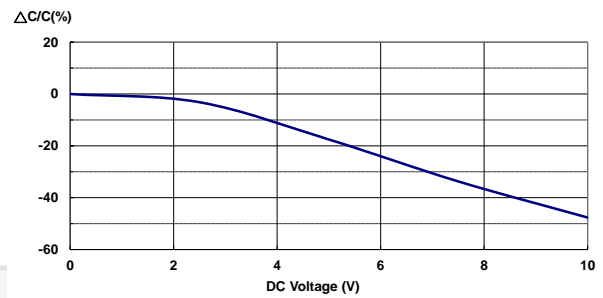

6. Capacitance – AC Voltage Characteristics

(Equipment: 4284A)

