

# FCU-100-V2 Series

10/100TX to 100FX Media Converter, Multi-Mode or Single-Mode, SC / ST Connector; Version 2 Hardware

## Features

- ▶ Complies with IEEE 802.3 100BaseT & IEEE 802.3u 100BaseTX/FX Standards
- ▶ Supports Store-and-Forward Switching Mechanism
- ▶ 10/100Mbps Auto Negotiation
- ▶ Supports 9K Bytes Jumbo Frame Size
- ▶ Supports Link Alarm and Rear Panel DIP Switch
- ▶ Supports 2K MAC Address
- ▶ Supports 128K Bytes Packet Buffer
- ▶ Configuration DIP Switch Supports Auto, Speed, Duplex, Auto MDI/MDIX, and Link-Fault-Pass-Through
- ▶ Operating Temperature Range: 0°C to 50°C
- ▶ Rackmount & Wall-Mountable
- ▶ 5-Year Warranty




## INTRODUCTION

Antaira Technologies' FCU-100-V2 series is a compact fiber to Ethernet media converter housed in a metal case and conforms to the FCC emissions standards. The FCU-100-V2 series features a standard SC or ST fiber connector as well as the RJ45 Ethernet connector. The copper media converter is fully compliant with IEEE 802.3 and 802.3u Fast Ethernet. The industrial media converter features LED diagnostics for power, activity, link and Full/Half Duplex operations. The FCU-100-V2 series is a 10/100 multi-mode or single-mode fiber media converter capable of communication up to 30KM depending on the model of the series.

## DIMENSIONS

UNIT:MM

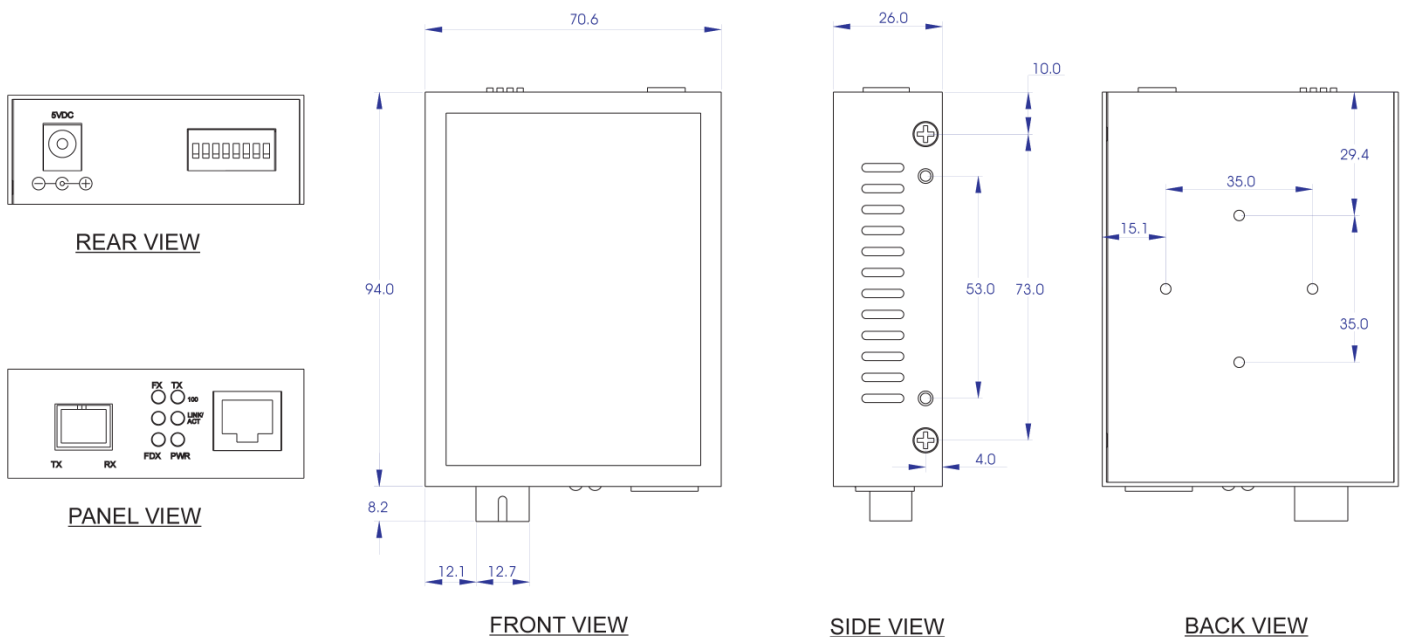

## SPECIFICATIONS

<b>Technology</b>		<b>Power Requirement</b>	
<b>Standards</b>	IEEE 802.3 10BaseT Ethernet IEEE 802.3u 100BaseTX/FX Fast Ethernet	<b>AC Input</b>	100VAC~240VAC
<b>Processing Type</b>	Store and Forward	<b>DC Output</b>	5V
<b>Switch Properties</b>		<b>System Power Consumption</b>	2.2W
<b>Transfer Rate</b>	14,880pps for Ethernet Port 148,800pps for Fast Ethernet Port	<b>Frequency Range</b>	50~60Hz
<b>Jumbo Frame</b>	9Kbytes	<b>Environmental Limits</b>	
<b>MAC Table Size</b>	2K	<b>Operating Temperature</b>	0°C ~ 50°C
<b>Packet Buffer</b>	128Kbytes	<b>Storage Temperature</b>	-20°C ~ 60°C
<b>Interface</b>		<b>Ambient Relative Humidity</b>	5% to 90%, (non-condensing)
<b>Ethernet Port</b>	1*10/100BaseT(X) auto negotiation speed, Full/Half duplex mode, and auto MDI/MDIX connection	<b>Regulatory Approvals</b>	
<b>Fiber Port</b>	1*100Base-FX	<b>Safety</b>	FCC Class A, CE
<b>LED Indicators</b>	Power, FDX, Status, Speed, F/O Link/Act, TX Link/Act	<b>Warranty</b>	5 Years
<b>Mechanical Characteristics</b>			
<b>Dimensions</b>	71 x 26 x 94 mm (W x H x D)		
<b>Weight</b>	Unit: 0.45 lb. Shipping: 1.00 lb.		
<b>Mounting</b>	Rackmount / Wall mounting		

## ORDERING INFO

<b>FCU-100SC-V2</b>	10/100TX to 100FX Media Converter, Multi-Mode 2KM, SC Connector; Version 2 Hardware
<b>FCU-100SC-S3-V2</b>	10/100TX to 100FX Media Converter, Single-Mode 30KM, SC Connector; Version 2 Hardware
<b>FCU-100ST-V2</b>	10/100TX to 100FX Media Converter, Multi-Mode 2KM, ST Connector; Version 2 Hardware
<b>FCU-100ST-S3-V2</b>	10/100TX to 100FX Media Converter, Single-Mode 30KM, ST Connector; Version 2 Hardware
<b>FCU-100WA-M-V2</b>	10/100TX to 10/100FX Single Fiber (WDM) Media Converter, Multi-Mode 2KM, TX1310nm - RX1550nm; Version 2 Hardware
<b>FCU-100WB-M-V2</b>	10/100TX to 10/100FX Single Fiber (WDM) Media Converter, Multi-Mode 2KM, TX1550nm - RX1310nm; Version 2 Hardware
<b>FCU-100WA-S2-V2</b>	10/100TX to 10/100FX Single Fiber (WDM) Media Converter, Single-Mode 20KM, TX1310nm - RX1550nm; Version 2 Hardware
<b>FCU-100WB-S2-V2</b>	10/100TX to 10/100FX Single Fiber (WDM) Media Converter, Single-Mode 20KM, TX1550nm - RX1310nm; Version 2 Hardware