


POL	MATERIAL NUMBER	ENGINEERING NUMBER	FINISHED LENGTH
8	1200705208	8R8J20E02C3003	0.3M ±10 -0 [0.98' +1.75" -0]

FEMALE FACE VIEW

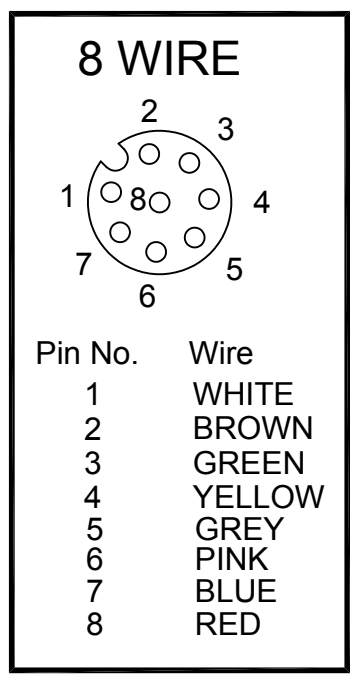

CONNECTOR SPECIFICATION:

VOLTAGE RATING	30VAC/36VDC
AMPERAGE RATING	2A
PROTECTION	IP68
OPERATING TEMPERATURE	-25°C TO +90°C
UL CERTIFICATION	FILE NO. E152210
CSA CERTIFICATION	FILE NO. LR6837

ITEM	COMPONENT	MATERIAL	FINISH
5	O-RING	VITON (NBR)	BLACK
4	RECEPTACLE SHELLS	BRASS	NICKEL PLATED
3	CONTACT SOCKET	F.C.BRASS ASTM B16	GOLD OVER NICKEL
2	INSERT	NYLON 6/6	-
1	8 x 0.25 CONDUCT.	PVC	-
	300V		

DESCRIPTION EC NO: WEU2010-0391 DRWN: LSTEMMLE 2010/03/01 CHKD: NS APPR: NSTAUDIG 2010/03/03 1 REV	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	▽ = 0 ∇ = 0	mm INCH 4 PLACES ±--- ±--- 3 PLACES ±--- ±--- 2 PLACES ±--- ±.01 1 PLACE ±0.3 ±--- ANGULAR ± --- °	MM ONLY	2:1	METRIC	
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SEE TABLE	DRAWN BY DATE LSTEMMLE 2010/03/01 CHECKED BY DATE FP 2010/03/02 APPROVED BY DATE NSTAUDIG 2010/03/03	MMC-8P-FE-REC-PG9-XM PVC 0.25 WIRE FRONT MOUNTING	
				MATERIAL NO. SD-120070-020 SIZE A3 THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	DOCUMENT NO. SD-120070-020	SHEET NO. 1 OF 1