
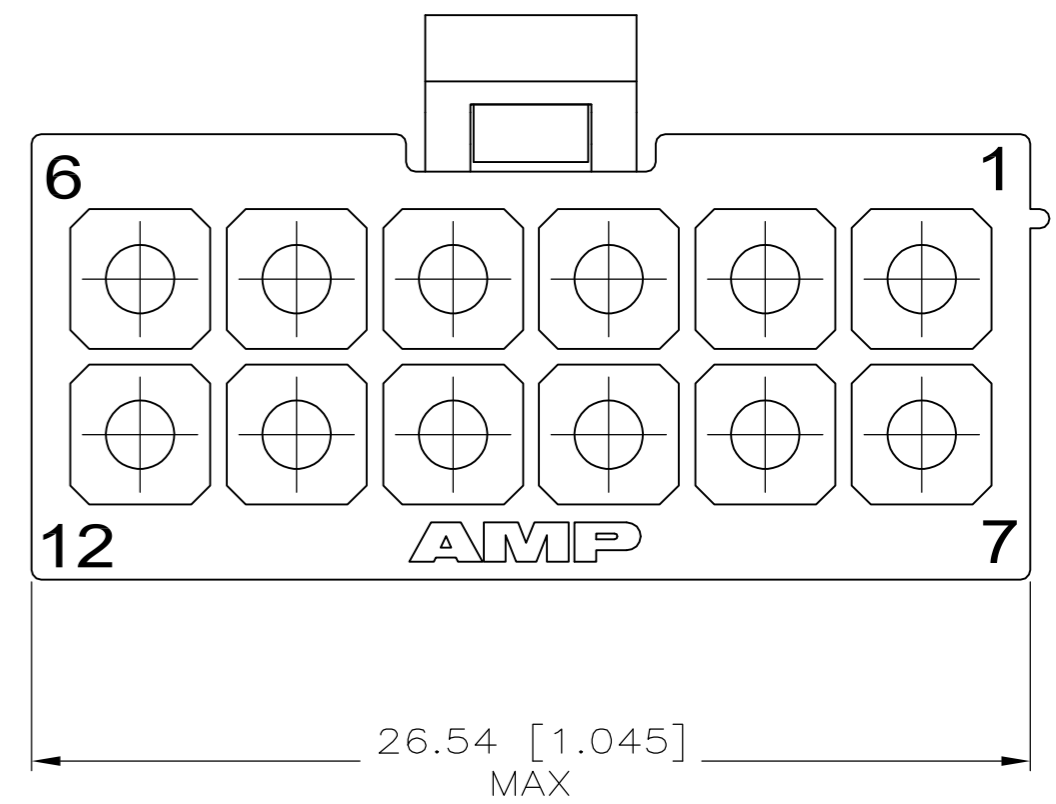


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
CM	00	L	REVISED PER ECR-15-001261	02MAR15	SC KD

- 1. 150°C TEMPERATURE RATING FOR THIS HOUSING IS FOR SHORT TERM DURATION ONLY. MAXIMUM OPERATING TEMPERATURE REMAINS 105°C.
- 2. INDIVIDUAL CORING FEATURES AROUND BASES OF SILOS MAY NOT BE PRESENT IN ALL LOCATIONS SHOWN.

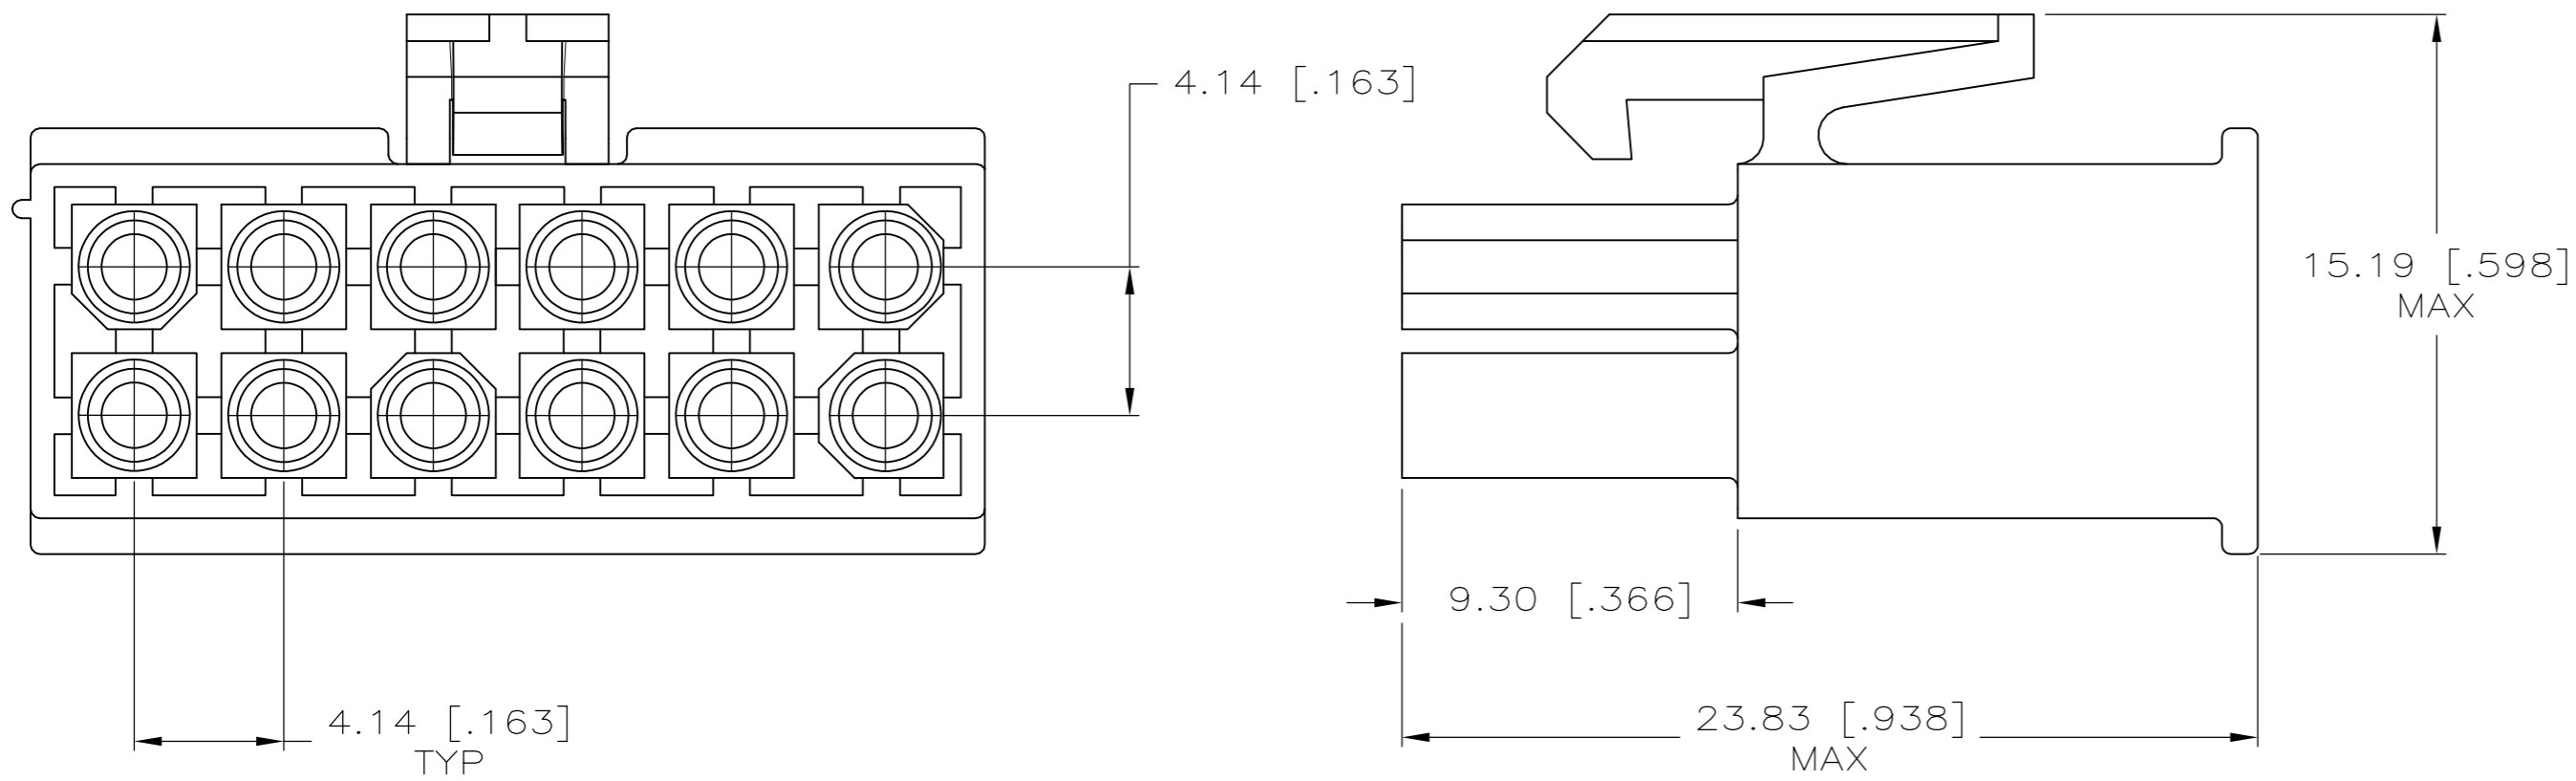

1	HIGH TEMP NYLON, UL94V-2, BLACK	1-770581-0
	NYLON, UL94V-0, WHITE	770581-1
	MATERIAL	PART NO

METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	S. HOOVER	12-MAY-2004		TE Connectivity			
DIMENSIONS: mm [INCHES]		CHK	C. JONES	12-MAY-2004		PLUG, 12 CIRCUIT, MINI UNIVERSAL MATE-N-LOK™			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	C. JONES	12-MAY-2004		NAME			
0 PLC ±		PRODUCT SPEC	NAME			SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
1 PLC ±		APPLICATION SPEC	NAME			A2	00779	C=770581	
2 PLC ±		WEIGHT	NAME			SCALE		SHEET	REV
3 PLC ± 0.13 [.005]		CUSTOMER DRAWING	NAME			5:1		1 of 1	L
4 PLC ±			NAME						
ANGLES ±			NAME						
FINISH			NAME						