


NOTES:

MATERIAL: HOUSING: SHELL: CONTACT:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, NICKEL PLATED COPPER ALLOY, 30µ" GOLD PLATED

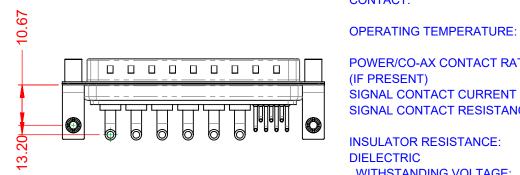

POWER/CO-AX CONTACT RATING:	20A (CURRENT
(IF PRESENT)	
SIGNAL CONTACT CURRENT RATING:	5A PER CONTA
SIGNAL CONTACT RESISTANCE:	10mΩ MAX.
INSULATOR RESISTANCE:	5000MΩ min.

WITHSTANDING VOLTAGE:

.XX ±0.13 .XXX ±0.05

ſ	COMBINATION D-SUB		SW REFERENCE NO.: 629 COMBO ASSEMBLY				
			DRAWN: C.B		DATE: JAN. 01/20	19	
			CHECKED:		DATE:		
		EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE:	(IN C.A.D. 1:1)	SHEET 1 OF	2
	YOUR CONNECTION TO	TORONTO, ONTARIO CANADA O QUALITY & SERVICE	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 629-13W		W6640-2ND	ISSUE
				PART NU	MBER: 629-13	W6640-2ND	1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

Г) ACT

-55°C ~ 125°C

1000V AC rms

