
			0	∞ >
Z'				
↔			LAYOUT SHOWN AS EXAN	ЛРLE
<ul> <li>CHARACTERISTICS</li> <li>-Standard : Based on NIL-DTL-38999 Series III</li> <li>-Shell Material : Composite</li> <li>-Shell Plating : Olive drab Cadmium</li> <li>-Insulator : Thermoplastic</li> <li>-Contacts : Copper Alloy</li> <li>-Seals &amp; Grommet : Silicon Elastomer</li> <li>-Contact Plating : Gold over copper Alloy 0.8µm minimum</li> <li>-Durability : 500 Mating cycles</li> <li>-Delivered with Souriau contacts and Accessories</li> </ul>	Keying Shown as exampleConnector dimensionDimNominalØS29.4 MaxZ'31.5 MaxVV THREADM18x1-6g		SOURIAU shall not be liable for any no due to a use of the Products which the Specifications issued by either of the (professional recommendation) Country FR PN: 8D513J0	does not comply with e Parties or by a third party , technical notice.) Jurisdiction & Control List Not Listed
-Temperature Range <u>-</u> -65°C to +175°C -Salt Spray : 2000 hours		A 17-10-2016 ISS DATE Designed By:	Latest modification - by Date:	MOD CUSTOMER DRAWING
BASIC SERIES: 8D 5 - 13 J SHELL TYPE : Plug with RFI Shielding CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 13	08 J B ORIENTATION : B CONTACT TYPE : SOCKET (1500 Matings)	SCALE NA SOURIAU	General linear Tolerances: ±	M This document is the property of SOURIAU it must not be reproduced or communicated without permission
PLATING : J = Olive drab Cadmium	E E CONTACT LAYOUT : 13-08	FORMAT A3	SOURIAU D 8D513J08 C	

r	Ŧ	G	г п	m	D	0
		Contact Layout				
4		$X \begin{pmatrix} G \\ F \\$				
		Contacts           (Insert arrangement 13-8)           trangement 13-8)           Contact location           X-axis           (mm)         Y-axis           (mm)         (mm)           A         +.065 (1.65)         +.157 (3.99)           B         +.170 (4.32)         +.000 (0.00)           C         +.120 (3.05)        120 (3.05)           D         .000 (0.00)        170 (4.32)           E        120 (3.05)        120 (3.05)           F        170 (4.32)         +.000 (0.00)           G        065 (1.65)         +.157 (3.99)           H         +.000 (0.00)         +.044 (1.12)				
ى	Shell Arrangement Nu size no. c 13 -8	imber of Size Service Contact Supersede ontacts contacts rating location 8 20 I All MS20051-				
	F					SOURIAU shall not be liable for an due to a use of the Products wi the Specifications issued by either o (professional recommendat
CJ						Counti FR PN: 8D513
					A 17-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:
					TITLE	Compo
<b>→</b>					SCALE NA	General linear Tolerances: ±
					SOURIA	U WWW.SOURIAU.C
				_	FORMAT A3	SOURIAU 8D513J
L	Н	G	F	E	D	C

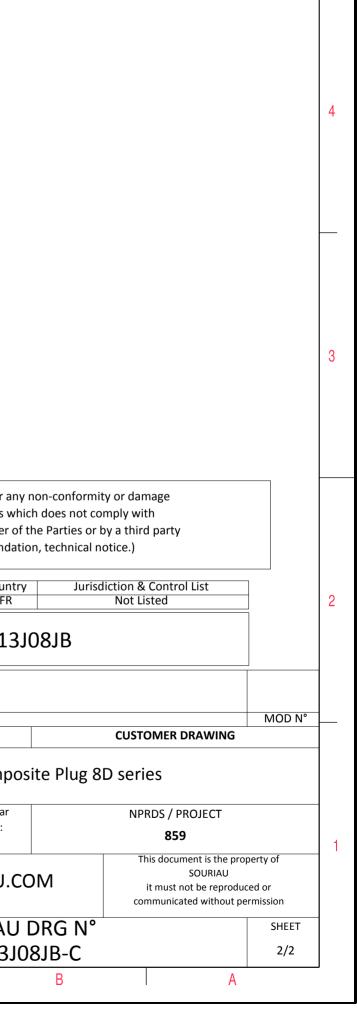

 $\triangleright$ 

σ