
—	۵	нт	<u> </u>			0	Ξ	A	
		ØS							
ω						LAYOUT SHOWN AS E	XAMPLE		
		Keying S	hown as example						
CHARACTERISTIC	5		Connector dime	nsion					
-Standard : Based c	n MIL-DTL-38999 Series III		Dim	Nominal					
-Shell Material -Shell Plating -Insulator -Contacts	-Shell Plating : Olive drab Cadmium Z 31 Max -Insulator : Thermoplastic VV THREAD M25x1-6g -Contacts : Copper Alloy : Copper Alloy				SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)				
-Seals & Grommet-Contact Plating	: Silicon Elastomer : Gold over copper Alloy 0.8μm r	minimum				Countr FR		& Control List Listed	
-Durability	: 500 Mating cycles iriau contacts and Accessories					PN: 8D517V			
-Temperature Rang					A 17-10-2016	First Release			
-Salt Spray Mass	: 500 hours : 35.31 g ± 10%				ISS DATE Designed By:	Latest modification - by Date:	CUS	TOMER DRAWING	MOD N°
					TITLE	Aluminium Plug 8D series			
BASIC SERIES:	8D 5 -	17 W 75 P	D		SCALE	General linear Tolerances:	N	IPRDS / PROJECT 859	
	Standard Crimp Contact			ORIENTATION : D	SOURIAU	WWW.SOURIAU.C		This document is the proper SOURIAU it must not be reproduced	
SHELL SIZE : 17	SHELL SIZE : 17 CONTACT TYPE : PIN(500 Matings)				communicated without permissi			iission	
	Olive drab Cadmium		С	ONTACT LAYOUT : 17-75	FORMAT	SOURIAU	DRG N°		SHEET
PLATING : W =					A3	8D517W			1/2

-	Ŧ	Q	н т	т		0
4		Contact Layout 75				
	Ctc A B	2#8 Triax 17-75 X Y 0 4.75 0 -4.75				
ω						
						SOURIAU shall not be liable for an due to a use of the Products wh the Specifications issued by either or (professional recommendat
N					A 17-10-20	Countr FR PN: 8D517V
					ISS DATE Designed By: TITLE	Latest modification - by Date: Alumin
					SCALE NA SOURIA	General linear Tolerances: ± U WWW.SOURIAU.C SOURIAU
	Н	G	F	E	A3	8D517W

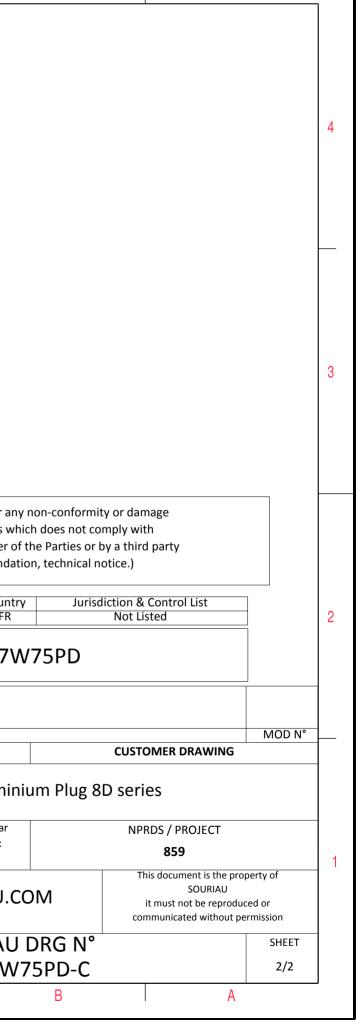

 \triangleright

σ