

ITEM	PART#	DESCRIPTION	QTY	UOM
A	334713306	MX150 ASSY 1.5 RCPT 1X3 CPA BLK A/3	1	PC
C	330123001	MX150 RCPT 0.3 TIN 14/16AWG D WIND SLD	3	PC
D	884260070	PAPER PRINTED PAPER WHITE (S100X150YAJ)	1	PC

FROM	TO	CABLE PART#	DESCRIPTION	COLOR
A1	--	100027101	14AWG DISC PVC BK OD 2.4 TXL BALAJI	BLACK
A2	--	100027101	14AWG DISC PVC BK OD 2.4 TXL BALAJI	BLACK
A3	--	100027101	14AWG DISC PVC BK OD 2.4 TXL BALAJI	BLACK

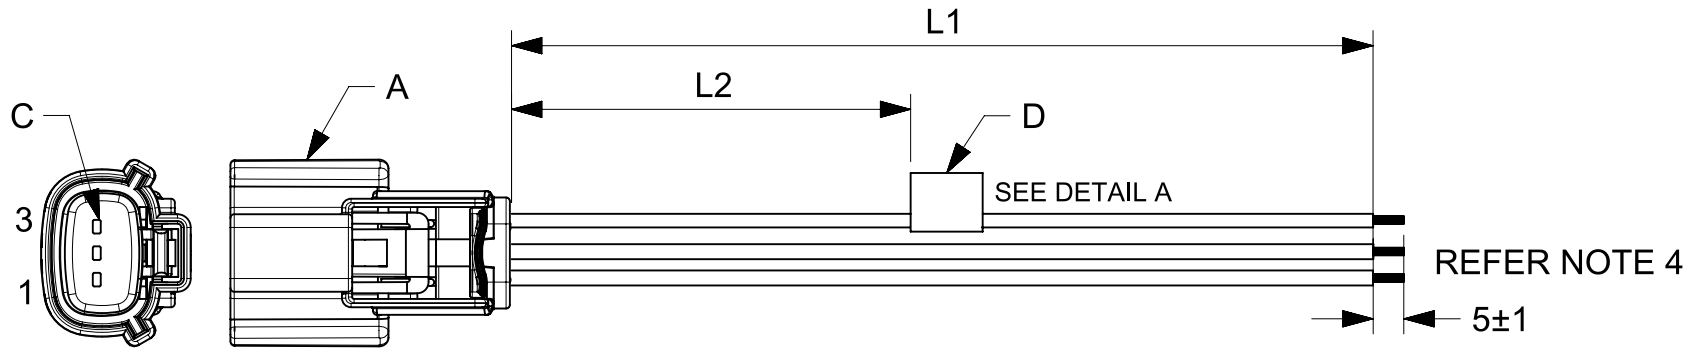


TABLE			
PART NUMBER	L1	L2	TITLE
2162811031	150±8	63 REF	MX150 R-S SR 3ckt 150mm Sn sealed cable
2162811032	300±10	138 REF	MX150 R-S SR 3ckt 300mm Sn sealed cable
2162811033	600±10	288 REF	MX150 R-S SR 3ckt 600mm Sn sealed cable

- NOTES**
- Connector view shown is from mating side.
 - Label text must be 2mm max. in height with Arial font.
 - Label must be wrapped in flag type on a single cable.
 - The free ends to be stripped twisted and tinned to the length of 5±1. the tinning dia must bemm max
 - Sealing should pass the IP67 rating as defined by product spec.

MOLEX P/N
MOLEX
BATCH WK/YR
DETAIL A

FUNCTIONAL SYMBOLS FA = 0 FE = 0 FP = 0	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:		<p>REFER THE TABLE</p> <p>PRODUCT CUSTOMER DRAWING</p>
	DIMENSION UNITS	SCALE	EC NO: 643544		
	mm	NTS	DRWN: NNANKOLA 2020/06/29		
	GENERAL TOLERANCES (UNLESS SPECIFIED)		CHK'D: SD 2020/08/31		
ANGULAR TOL ± °		APPR: SD 2020/08/31		DOCUMENT NUMBER	
4 PLACES ±		INITIAL REVISION:		2162811031	
3 PLACES ±		DRWN: NNANKOLA 2020/06/29		PSD	
2 PLACES ±		APPR: SD 2020/08/31		000	
1 PLACE ±		APPR: SD 2020/08/31		A	
0 PLACES ±		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		REVISION	
THIRD ANGLE PROJECTION		DRAWING		MATERIAL NUMBER	
		A4-SIZE		SEE TABLE	
SERIES		CUSTOMER		SHEET NUMBER	
216281		GENERAL MARKET		1 OF 1	