

TOLERANCE UNLESS OTHERWISE SPECIFIED DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER	
ORIGINAL	

(1)

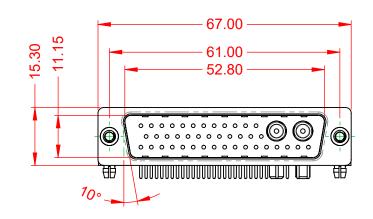



NOTES:


MATERIAL: HOUSING: SHELL: CONTACT:

DIELECTRIC

OPERATING TEMPERATURE:


WITHSTANDING VOLTAGE:

THERMOPLASTIC POLYESTER, UL94V-0 STEEL, TIN PLATED COPPER ALLOY, 30µ" GOLD PLATED



POWER/CO-AX CONTACT RATING:	40A (CURRENT)
(IF PRESENT)	· · · · · ·
SIGNAL CONTACT CURRENT RATING:	5A PER CONTACT
SIGNAL CONTACT RESISTANCE:	10mΩ MAX.
INSULATOR RESISTANCE:	5000MΩ min.

.X ±0.25 .XX ±0.13 .XXX ±0.05



				SW REFERENCE NO.: 629 COMBO ASSEMBLY				
	COMBINATION D-SUB		COMBINATION D-SUB		DRAWN:	C.B	DATE: JAN. 01/2	2019
			CHECKED	D:	DATE:			
	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE:	(IN C.A.D. 1:1)	SHEET 1 O	F 2		
		MANUFACTURE OR SALE OF APPARATUS	DRAWING	NUMBER: 629-43V	/2640-4TB	ISSUE		
YOUR CONNECTION TO			PART NU	MBER: 629-43V	/2640-4TB	1		

-55°C ~ 125°C

1000V AC rms



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

