

# NTPS-24-1.3 Power Supply

N-Tron Networking Series



## ▶▶▶ DIN Rail Mount Power Supply

The NTPS-24-1.3 is a DIN rail mount power supply designed to be used with N-Tron's Industrial Ethernet products.

### INPUT SPECIFICATIONS:

AC Voltage	100-240VAC
Frequency	47 to 63Hz
Input Current	<0.6A @ AC 100Vin <0.35A @ AC 196Vin
Inrush Current	36A max. @240VAC
DC Voltage	85-375VDC

### OUTPUT SPECIFICATIONS:

Output Voltage	24-28VDC
Maximum Load	1.3A
Ripple & Noise	<50mVpp
Voltage Accuracy	± 2%

### ENVIRONMENTAL CHARACTERISTICS:

Full Nominal Load	-10°C - 60°C
Storage Temperature	-25°C - 85°C
Cooling	Natural Convection

### MECHANICAL CHARACTERISTICS:

Dimensions	45w x 75h x 91d (mm) 1.8" x 3.0" x 3.6"
Weight	230g (0.5 Pounds)

### REGULATORY APPROVALS:


#### Hazardous Locations:

UL 1604 Listed, Class I Division 2 Hazardous Location Groups A, B, C, D



### Safety:

CE, EN 60950, EN 60204-1, EN 50178, IEC60950, UL 60950, UL 508  
CAN/CSA-C22.2 No. 60950 (CUR)  
CAN/CSA-C22.2 No. 14 (CUL)  
EN 61000-6-3 and -4 (Emissions)  
(EN 55011, EN 55022, Class B)  
EN 61000-6-2 and EN 61000-6-1 (Immunity)  
VDE 0160/W2 (Transient protect)

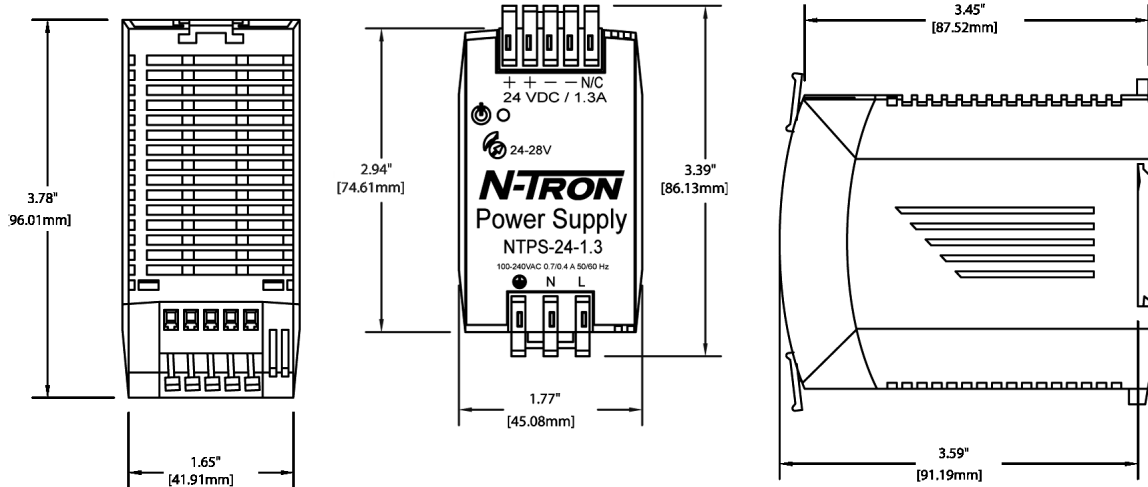

[www.redlion.net](http://www.redlion.net)

Connect. Monitor. Control.

**Americas**  
sales@redlion.net

**Asia-Pacific**  
asia@redlion.net

**Europe**  
**Middle East**  
**Africa**  
europe@redlion.net

+1 (717) 767-6511

As the global experts in communication, monitoring and control for industrial automation and networking, Red Lion has been delivering innovative solutions for over forty years. Our award-winning technology enables companies worldwide to gain real-time data visibility that drives productivity. Product brands include Red Lion, N-Tron and Sixnet. With headquarters in York, Pennsylvania, the company has offices across the Americas, Asia-Pacific and Europe. For more information, please visit [www.redlion.net](http://www.redlion.net). Red Lion is a Spectris company.