

ITEM	PART#	DESCRIPTION	QTY	UOM
A,B	522660211	2.5MWATERPROOF PLUG 2CKT 522660211	2	PC
C	501478000	2.5 W.P. CONN CRIMP PIN	4	PC
D	884260070	PAPER PRINTED PAPER WHITE (S100X150YAJ)	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	B2	1CX0.5 SQMM DISC PVC BK 1.6MM FLRY-B	BLACK
A2	B1	1CX0.5 SQMM DISC PVC BK 1.6MM FLRY-B	BLACK

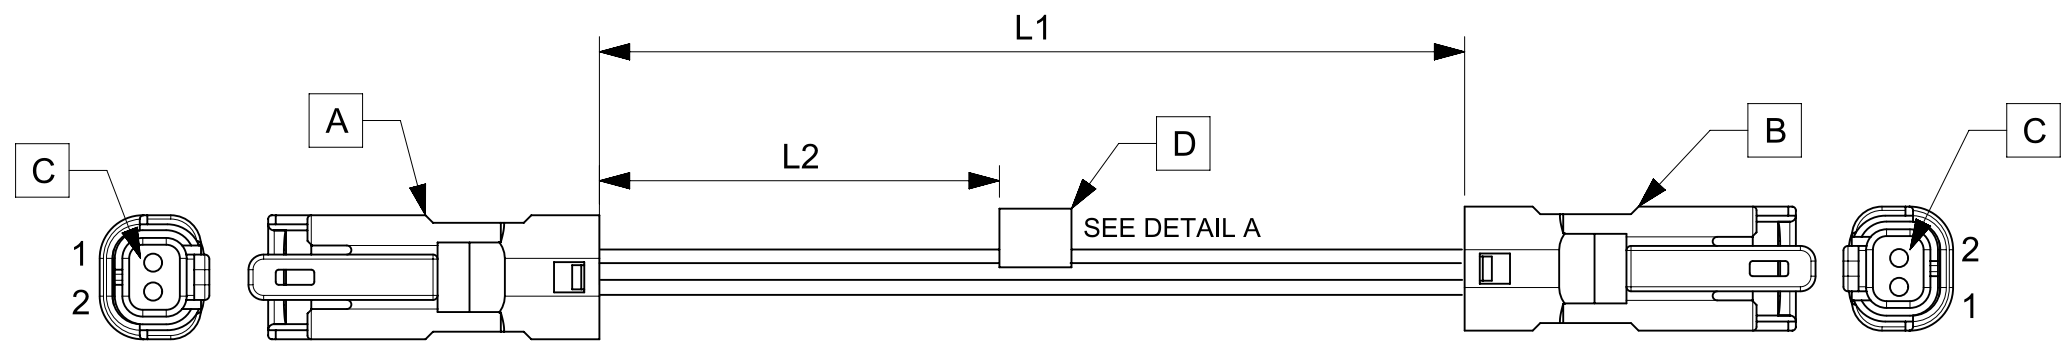


TABLE			
PART NUMBER	L1	L2	TITLE
2153121021	150±8	63 REF	MizuP25 P-P 2ckt 150mm Sn
2153121022	300±10	138 REF	MizuP25 P-P 2ckt 300mm Sn
2153121023	600±10	288 REF	MizuP25 P-P 2ckt 600mm Sn

NOTES

1. Connector view shown is from mating side.
2. Harness must pass 100% electrical continuity and polarity.
3. Connectors must pass the sealing specifications as defined by manufacturer.
4. Label text must be 2mm max. in height with Arial font.
5. Label must be wrapped in flag type on a single cable.

MOLEX P/N
MOLEX
BATCH WK/YR
DETAIL A

FUNCTIONAL SYMBOLS $\nabla_A = 0$ $\nabla_E = 0$ $\nabla_P = 0$ DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:					
	DIMENSION UNITS	SCALE	EC NO: 641784					REFER THE TABLE
	mm	NTS	DRWN: NNANKOLA 2020/07/19		PRODUCT CUSTOMER DRAWING			
	GENERAL TOLERANCES (UNLESS SPECIFIED)		CHK'D: SD 2020/07/20		DOCUMENT NUMBER			
ANGULAR TOL ± °		APPR: SD 2020/07/20		2153121021		DOC TYPE	DOC PART	REVISION
4 PLACES	±	INITIAL REVISION:		PSD		000	A	
3 PLACES	±	DRWN: NNANKOLA 2020/07/19		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER
2 PLACES	±	APPR: SD 2020/07/20		REFER THE TABLE		GENERAL MARKET		1 OF 1
1 PLACE	±	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING	SERIES		
0 PLACES	±				A4-SIZE	215312		