

T	Ω (<u>п</u>	m	0



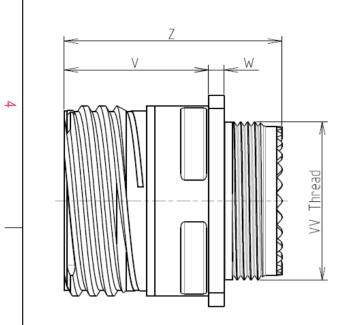



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 17

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium			
-Shell Plating	: Olive drab Cadmium			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	65°C to +175°C			
-Salt Spray	: 500 hours			

8D 0

G

17

W

22

А

F

Ν


Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	26.97		
R2	24.61		
S	33.3±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M25x1-6g		


ORIENTATION : N

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 17-22



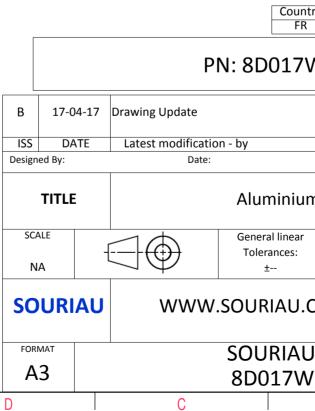

Φ	Þ				
		4			
S EXAMPLE		3			
r any non-conformit s which does not co er of the Parties or b adation, technical n untry Jurisc FR 7W22AN	mply with by a third party	2			
	CUSTOMER DRAWING				
Im Receptacle 8D series					
ar	NPRDS / PROJECT 859				
	This document is the property	1 7 of			
I.COM	COUDIAL				
U DRG N° SHEET					
W22AN-C		1/2			
В	A A				

		۵	г п	m		O
4		Contact Layout 22			Ā 22 -	SQUARE FLANGE RECEPTACLE (TYPE 0)
	Ctc A B	2#12 2#8 Triax 17-22 X Y 0 4.57 6.32 0			Ļ	Max. thickness panel for receptacle: Type 0: front m
3	C D	0 -4.57 -6.32 0				Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for a due to a use of the Products w the Specifications issued by either (professional recommend
2					B 17-04-1	Coun FR PN: 8D017
					ISS DATE Designed By: TITLE	
-					SCALE NA SOURIA	General linear Tolerances: ± WWW.SOURIAU.
	H	G	F	E	FORMAT A3 D	SOURIAU 8D017V
					V	

