
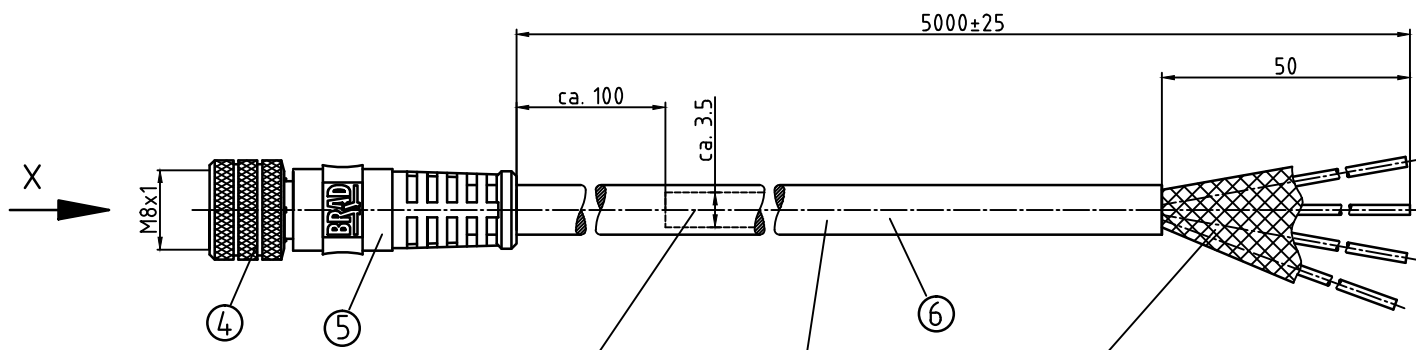


VIEW / Ansicht X  
MATING SIDE  
FEMALE CABLE CONNECTOR  
Steckseite  
Kabeldose  
4-Pol

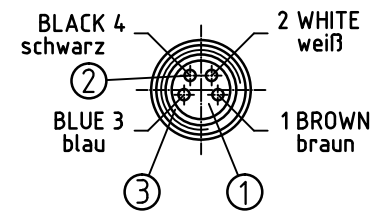

BRAIDED SHIELD CONNECTED TO FEMALE CABLE CONNECTOR  
Schirmgeflecht an Kabeldose angeschlossen

CABLE/Leitung 4x0.25 BLACK/schwarz PUR-SHLD-D4.8

CABLE PRINTING:  
Kabelbedruckung: Molex Connectivity GmbH "Material-No." X..

PROD. DATE  
Fertigungsdatum

CONNECTOR SPECIFICATION:	
VOLTAGE RATING	30 V
AMPERAGE RATING	3 AMPS
PROTECTION	IP67
OPERATING TEMPERATURE	-25°C TO +90°C

ITEM	COMPONENT	MATERIAL	FINISH
1	INSERT	PUR / BLACK	---
2	CONTACT SOCKET	COPPER ALLOY	GOLD OVER NICKEL
3	O-RING	VITON / RED	---
4	COUPLING NUT	BRASS	NICKEL PLATED
5	OVERMOLD	TPE / BLACK	---
6	CABLE- 4x0.25 24 AWG	PUR / BLACK	---

DESCRIPTION EC NO: WEU2011-0567 DRWN: BBRAUCH 2011/05/10 CHKD: REISSNER APPR: REISSNER 2011/06/08	QUALITY SYMBOLS ▽ = 0 ▽ = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
				mm	INCH	DRAWN BY BBRAUCH		DATE 2011/05/10	
		4 PLACES ±---		±---		CHECKED BY		DATE	
		3 PLACES ±---		±---		REISSNER		2011/05/10	
2 PLACES ±---		±---		APPROVED BY		DATE		M8S-4P-FE-STR-PURSHLD-5M ---	
1 PLACE ±0.3		±---		REISSNER		2011/06/08			
ANGULAR ± --- °				MATERIAL NO. 1200865357		DOCUMENT NO. SD-120086-273		SHEET NO. 1 OF 1	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					