

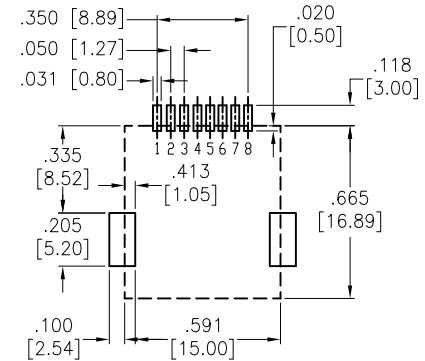

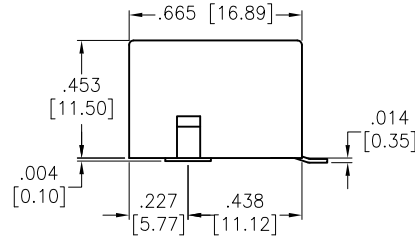


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	10/4/04	
A		REDRAWN	11/30/11	
B		UPDATED DRAWING	7/26/18	HR/MY

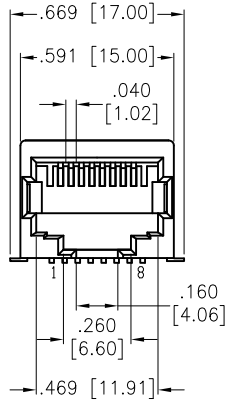

RECOMMENDED PCB LAYOUT

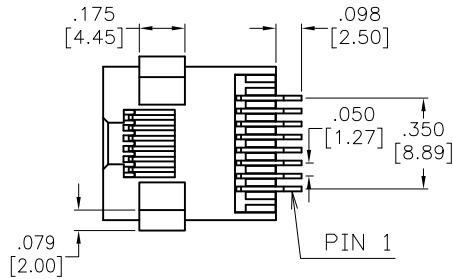

SPECIFICATIONS:

Material:
 Insulator: Hi-temp thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Hold down: Copper Alloy, Tin plated
 Plating:

Gold over Nickel underplate on contact area
 Gold flash over Nickel underplate on solder tails

Electrical:
 Voltage rating: 150 VAC max
 Current rating: 1.5 A max
 Contact resistance: 20 mohms max
 Insulation resistance: 500 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1,000 Vrms for 1 minute
 Temperature Rating:
 Operating temperature: -40°C to +85°C

Environmental:
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010

ADAM TECH
 INTERCONNECTS
 909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

APPROVALS		DATE
DRAWN	SS	10/4/04
CHECKED		
APPROVED		

TITLE		
MODULAR TELEPHONE JACK, 8P8C RIGHT ANGLE, SURFACE MOUNT		
SIZE	PART NO.	REV.
X	MTJ-88WBX1	B
REF:	S00065T	SCALE: NTS
		SHEET 1 OF 1