


WIRING DIAGRAM :

△2	△1	△2
90635-1301	34 CCT CABLE	90635-1301
CIRCUIT No.	CONDUCTOR COLOUR REF	CIRCUIT No.
1	BROWN	1
2	TAN	2
3	RED	3
4	TAN	4
5	ORANGE	5
6	TAN	6
7	YELLOW	7
8	TAN	8
9	GREEN	9
10	TAN	10
11	BLUE	11
12	TAN	12
13	VIOLET	13
14	TAN	14
15	GRAY	15
16	TAN	16
17	WHITE	17
18	TAN	18
19	BLACK	19
20	TAN	20
21	BROWN	21
22	TAN	22
23	RED	23
24	TAN	24
25	ORANGE	25
26	TAN	26
27	YELLOW	27
28	TAN	28
29	GREEN	29
30	TAN	30

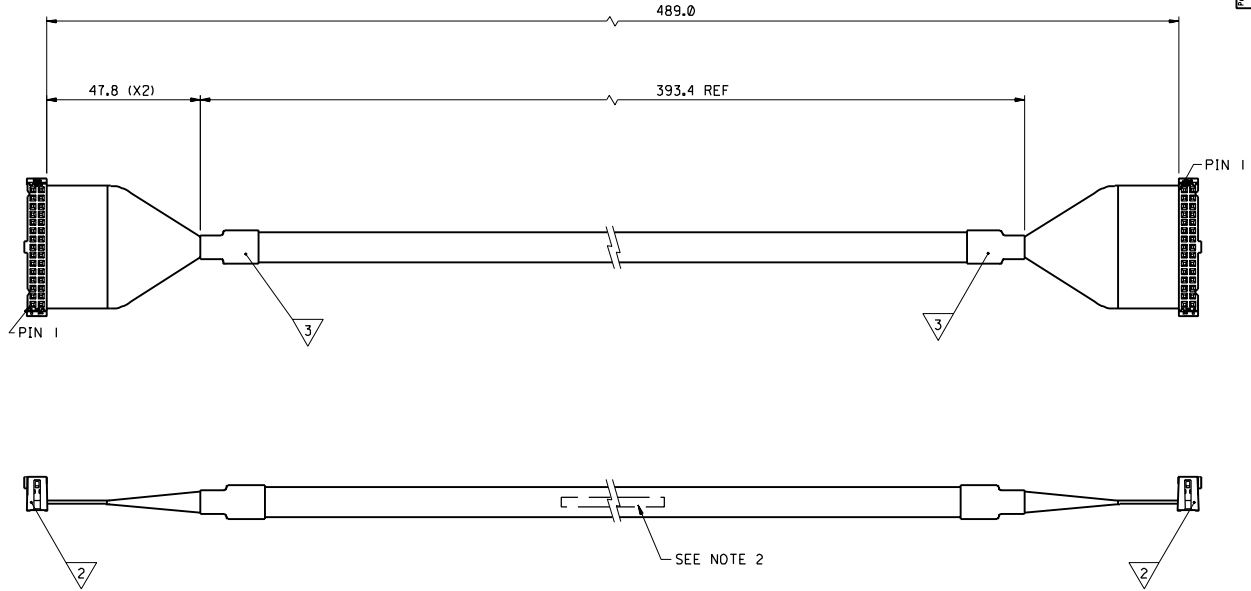

BILL OF MATERIALS

NO.	QTY	SUPPLIER	DESCRIPTION	PART No.	NOTE
△1	1	AMP	34 CCT FLAT-TO-ROUND CABLE 28 AWG	1-57648-7	2,3
△2	2	MOLEX	QF50 30 CCT CONNECTOR	90635-1301	3
△3	2	CABLE ACCESSORIES	HEAT SHRINK TUBING	CGPT 12.7/6.4-0	

NOTES:

- MOLEX'S UL RECOGNITION MARK AND CSA CERTIFICATION MARK SHALL BE APPLIED TO THE SMALLEST BUNDLE OR UNIT CONTAINER IN WHICH THE PRODUCT IS PACKAGED.
- CABLE TO BE CONTINUITY TESTED AND AN INSPECTION MARK APPLIED IN PERMANENT AND LEGIBLE MANNER, LOCATED APPROXIMATELY WHERE SHOWN USING 3.0 HEIGHT CHARACTERS MIN. MARK TO INCLUDE DELL P/N AND REVISION *82346-A00-00*.
- HARNESS TO BE 100% ELECTRICALLY TESTED.

ORIGINAL RELEASE EEN E70453 97-02-00 MUR	REVISIONS	DIMENSIONS SHOWN (METRIC) INCH UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ± ° INCH (METRIC)		DRWG BY MOR	REVISE ONLY ON CAD SYSTEM	
		3 PLACE ± .	±		DRWG BY	DATE
A I	LTR	1 PLACE ± .	±	APPD BY	TITLE ROUND TO FLAT IDC CABLE HARNESS	
		DESIGN DIMENSION (MM) (IN.) (PRIMARY) □ IN. □ MM		SCALE	SHEET NO. DATE	
EQUIVALENT DIMENSION (SECONDARY) □ IN. □ MM		SCALE		PART NO.		SIZE
		1:1		92303-0010		C
				SDA-92303-0010		

PART NO. 92303-0010
REV. 001
SDA-92303-0010