


.X ±0.25





NOTES:

MATERIAL: HOUSING: THERMOPLASTIC POLYESTER, UL94V-0 SHELL: STEEL, NICKEL PLATED CONTACT: COPPER ALLOY, 30µ GOLD PLATING

OPERATING TEMPERATURE: -55°C ~ 125°C


SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT SIGNAL CONTACT RESISTANCE: 10mQ MAX. INSULATOR RESISTANCE: 5000MΩ min. DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC rms

CONTACT CODE 40 POWER CONTACT FOOTPRINT - 13.20mm 40 IS STANDARD AS SHOWN ON SHEETS 3 & 4 CONTACT CODE 50 POWER CONTACT FOOTPRINT - 20.33mm

		SW REFERENCE NO.: 630 COMBO ASSEMBLY			
			DRAWN: C.B	DATE: JAN. 01/2019	
			CHECKED:	DATE:	
	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF	4
	TORONTO, ONTARIO CANADA	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE	DRAWING NUMBER: 630-2WK	2650-2ND	ISSUE
	YOUR CONNECTION TO QUALITY & SERVICE	MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	PART NUMBER: 630-2WK	2650-2ND	1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

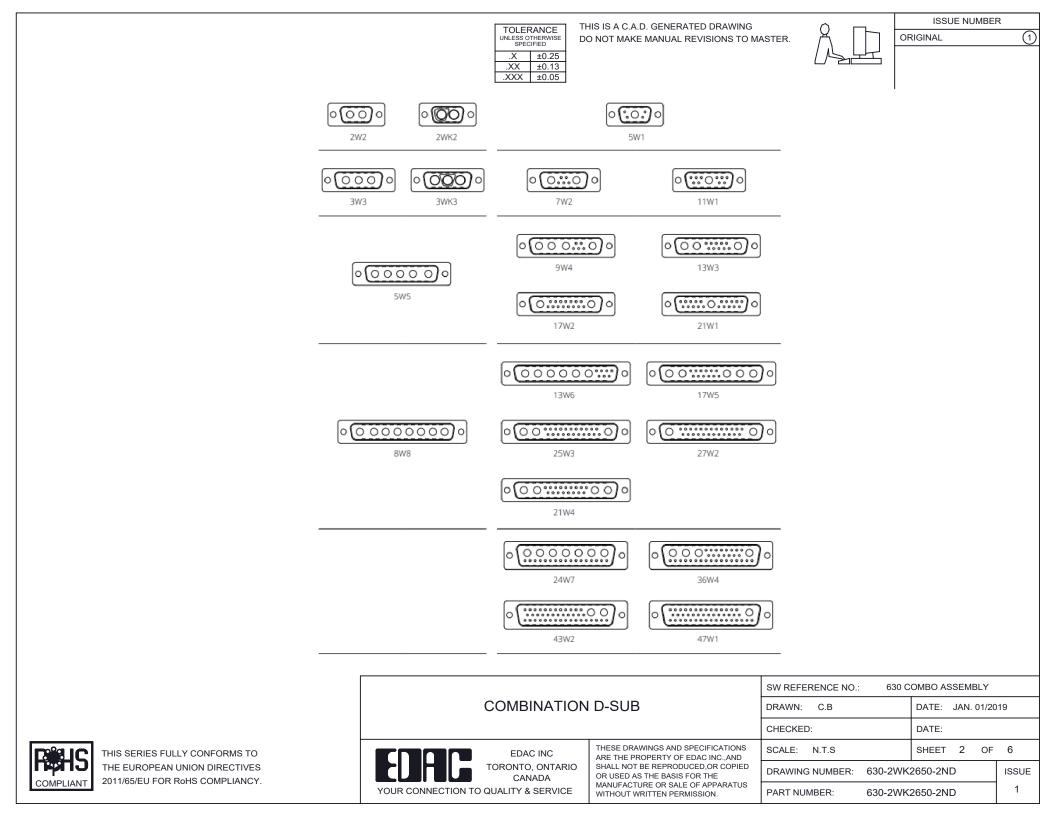



THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER ORIGINAL

 $\overline{(1)}$

2W2 / 2WK2

3W3 / 3WK3

5W1 Male/Female

7W2 Male/Female





5W5 Male


5W5 Female

COMPLIANT




PCB EDGE






PCB EDGE




PCB EDGE

11W1 Male/Female

21W4 Male/Female




27W2 Male/Female




21W1 Male/Female



COMBINATION D-SUB		SW REFERENCE NO.: 630 COMBO ASSEMBLY		
		DRAWN: C.B	DATE: JAN. 01/20	19
		CHECKED:	DATE:	
EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC., AND	SCALE: N.T.S	SHEET 3 OF	4
TORONTO, ONTAR CANADA	OR USED AS THE BASIS FOR THE	DRAWING NUMBER: 630-2W	(2650-2ND	ISSUE
YOUR CONNECTION TO QUALITY & SERVICE	MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	PART NUMBER: 630-2W	(2650-2ND	1










17W2 Male/Female



PCB EDGE

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.



CURRENT RATING / ØA

10A / 2.2 20A / 3.3 30A / 3.7 40A / 4.2

-	21.70					
		22.9	17			
				_		
I !						

TOLERANCE UNLESS OTHERWISE SPECIFIED DAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.















13W3 Male





25W3 Male





2.77

24.77

23.3

PCB EDGE

PCB EDGE

31.75

21.9

36W4 Female



13W6 Male





30.50

2.77

22.16

20.76

13W6 Female

13W3 Female

.X±0.25.XX±0.13.XXX±0.05

43W2 Female




17W5 Male


COMPLIANT










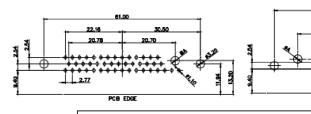


20.7

13.72

PCB EDGE

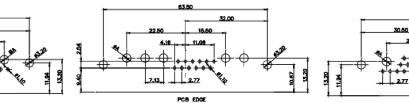



	COMBINATION D-SUB		SW REFERENCE NO.: 630 COMBO ASSEMBLY		
			DRAWN: C.B	DATE: JAN. 01/20	019
			CHECKED:	DATE:	
THIS SERIES FULLY CONFORMS TO	EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND	SCALE: N.T.S	SHEET 4 OF	4
THE EUROPEAN UNION DIRECTIVES	TORONTO, ONTARIO CANADA	SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING NUMBER: 630-2WI	(2650-2ND	ISSUE
	YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 630-2W	<2650-2ND	1