



S21 TRANS LOG MAG.
▶ 0.000 dB 0.100 dB/DIU

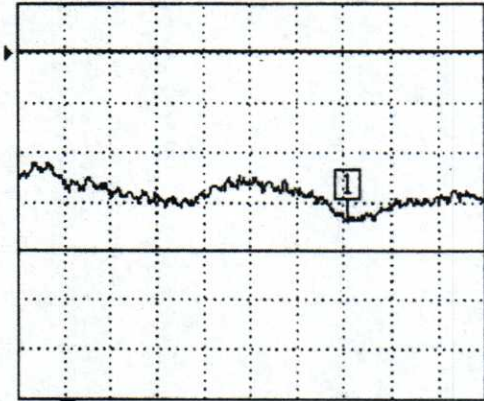


4.000000 GHz 8.000000

S11 REFL LOG MAG.
▶ 0.000 dB 5.000 dB/DIU

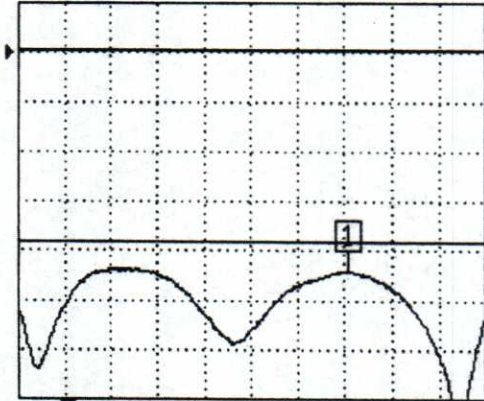


4.000000 GHz 8.000000

S22 REFL LOG MAG.
▶ 0.000 dB 5.000 dB/DIU

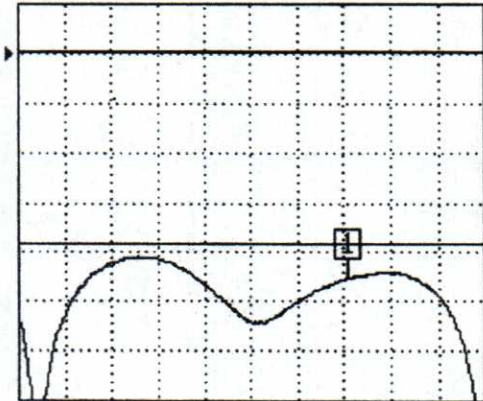

4.000000 GHz 8.000000

S12 TRANS LOG MAG.
▶ 0.000 dB 5.000 dB/DIU

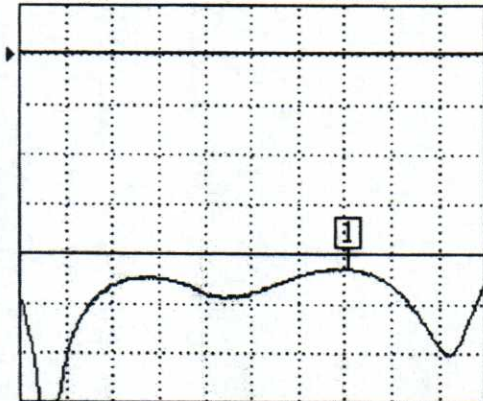

4.000000 GHz 8.000000

CH 1 - S21
REFERENCE PLANE
0.0000 mm

MARKER 1
6.840000 GHz
-0.339 dB

MARKER TO MAX
▶ MARKER TO MIN

MARKER READOUT
FUNCTIONS

D3C4080 - Circulator

4.00 - 8.00 GHz

Isolation: 20 dB Min

Insertion Loss: 0.40 dB Max

VSWR: 1.25:1 Max

SMA-F connectors all 3 Ports