

SUMMARY

Wires

Low voltage 6



Image is for illustrative purpose only

| | |
|------------------|------------------------------------|
| Series | 1K |
| Termination type | Female crimp |
| IP rating | 68 |
| AWG wire size | 26.00 - 22.00 |
| Cable Ø | 3.60 - 4.00 mm |
| Status | active |
| Matching parts | FGG.1K.306.CYCC40Z |

Download

[Request a quote](#)

[Eplan](#)

[Catalog](#)

TECHNICAL DETAILS

Mechanics

| | |
|-------------------|---|
| Shell Style/Model | PH*: Free receptacle, cable collet and nut for fitting a bend relief |
| Keying | 1 key (alpha=0, plug: male contacts, receptacle: female contacts) |
| Housing Material | Brass (chrome plated [SAE AMS 2460]) shell and collet nut, nickel plated [SAE AMS QQ N 290] brass latch sleeve and mid pieces |
| Variant | Z : Nut for fitting a bend relief |
| Weight | 28.77 g |

Performance

| | |
|---------------|----------------------------|
| Configuration | 1K.306 : 6 Low Voltage |
| Insulator | Y: PEEK for crimp contacts |
| Rated Current | 7 Amps |

Specifications

| | |
|--------------------|-------------------------------|
| Contact Type: | Crimp |
| Contact Retention: | 22 N |
| Contact Dia.: | 0.7 mm (0.028in) |
| Bucket Dia.: | 0.8 mm (0.031in) |
| Min. Conductor: | 0.14 mm ² (AWG 26) |
| Max. Conductor: | 0.34 mm ² (AWG 22) |


LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

R (max): 6.1 mOhm
 Vtest (contact-shell): 1450 V (AC), 2050 V (DC)
 Vtest (contact-contact): 1350 V (AC), 1910 V (DC)

Others

Endurance (Shell): 5000 mating cycles
 Temp (min / max): -55°C / +200°C
 Humidity (max): <=95% [at 60 deg C / 140 F]
 Vibration: 15 g [10 Hz - 2000 Hz]
 Shock Resistance: 100 g [6 ms]
 Climatical Category: 50/175/21
 Shielding (min): 95 dB (10 MHz)
 Shielding (min): 80 dB (1 GHz)
 Salt Spray Corrosion: >1000 hr

DRAWINGS

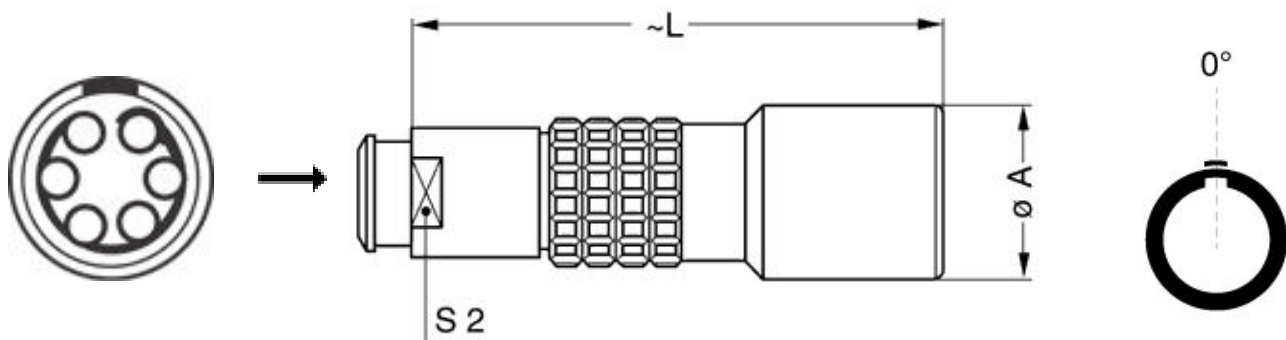

Dimensions

| | A | L | S2 |
|-----|------|------|------|
| mm. | 15 | 45 | 9 |
| in. | 0,59 | 1,77 | 0,35 |

RECOMMENDED BY LEMO

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Tools

| | |
|----------------------|----------------------------------|
| Crimp Tool: | DPC.91.701.V |
| Crimp settings: | AWG/Selector = 22-24-26/6-5-5 |
| Positionner: | DCE.91.071.BVM |
| Extractor: | DCF.91.070.2LT |
| Replacement contact: | EGG.1B.655.ZZM |
| Spanner wrench: | DCD.1E.008.PA090 |

Cables

| | | | |
|--------------------|---------------|------|---|
| CMN.06.T26.037QGZE | TPR (medical) | Grey |  |
|--------------------|---------------|------|---|

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.