



THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER ORIGINAL

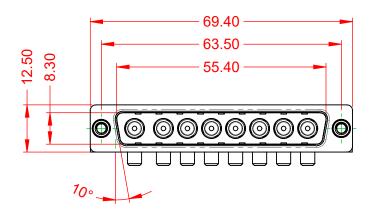



NOTES:

MATERIAL:

HOUSING: THERMOPLASTIC POLYESTER, UL94V-0

SHELL: STEEL, TIN PLATED

CONTACT: COPPER ALLOY, GOLD FLASH PLATED

OPERATING TEMPERATURE: -55°C ~ 125°C

POWER/CO-AX CONTACT RATING: 40A (CURRENT)

(IF PRESENT)


SIGNAL CONTACT CURRENT RATING: 5A PER CONTACT


SIGNAL CONTACT RESISTANCE: $10m\Omega$ MAX.

INSULATOR RESISTANCE: 5000MΩ min.

DIELECTRIC

WITHSTANDING VOLTAGE: 1000V AC rms



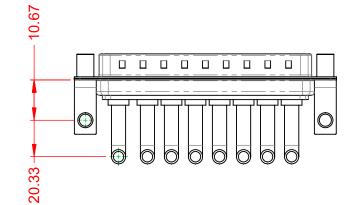

COMBINATION D-SUB



EDAC INC TORONTO, ONTARIO CANADA

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

	SW REFERENCE NO.: 629 COMBO ASSEMBLY		
	DRAWN: C.B	DATE: JAN. 01/2019	
	CHECKED:	DATE:	
	SCALE: (IN C.A.D. 1:1)	SHEET 1 OF 2	
	DRAWING NUMBER: 629-8W8-250-4T6		SUE

629-8W8-250-4T6

PART NUMBER:



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.

TOLERANCE UNLESS OTHERWISE SPECIFIED

.X ±0.25 .XX ±0.13 .XXX ±0.05

THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER (1) ORIGINAL

00

(OO) o 2WK2

o(:o: 5W1

2W2

0000 3W3

0000)0 lοſ 3WK3

0...0 7W2

...0...

11W1

0(00000) 5W5

0000 9W4

000::::0

13W3

0......0 17W2

o(::::::0:::::: 21W1

000000::: 13W6

000:::::000

17W5

00000000 8W8

00::::::0 25W3

O :::::::::::: O 27W2

0000000

21W4

00000000 24W7

36W4





43W2

47W1

COMBINATION D-SUB

YOUR CONNECTION TO QUALITY & SERVICE

EDAC INC TORONTO, ONTARIO CANADA

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC..AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

629 COMBO ASSEMBLY SW REFERENCE NO.: DRAWN: DATE: JAN. 01/2019 CHECKED: DATE: SHEET 2 OF 2 SCALE: N.T.S

629-8W8-250-4T6 ISSUE DRAWING NUMBER: PART NUMBER: 629-8W8-250-4T6

COMPLIANT