


ORDERING GUIDE

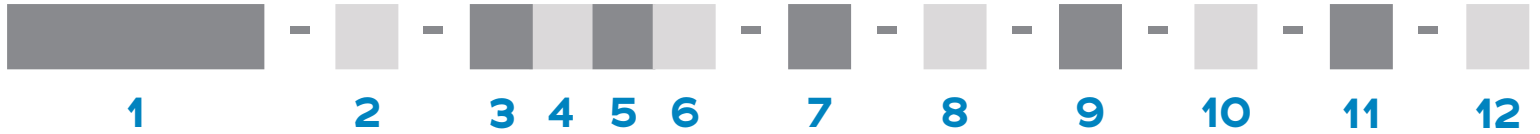

1 Series	MBPS Metal Bi-Lobe Pin Single-Row	MBSS Metal Bi-Lobe Socket Single-Row
2 Number Of Contacts	05 09 15 21 25 31 37 51	
3 Termination Type	WD Discrete Wires	
4 Wire Gage	0 30 AWG (STD)	2 32 AWG
5 Wire Type	Q NEMA HP3 (formerly M16878/4 and /6)	XX.X M22759/33 (30 AWG only)
6 Wire Length	18.0 18.00" (STD)	XX.X Custom Length
7 Color Scheme	C 10 Repeating Colors Per MIL STD 681	Y All Other Wire Colors
8 Shell Material & Finish	N Aluminum Shell, Electroless Nickel Plated B Aluminium Shell, Black Anodized T Titanium Shell, Unplated	CD Aluminium Shell, Cadmium Plated S Stainless Steel Shell, Passivated
9 Common Options	ETH End Threaded Hole, #0-80 YY Non Standard Hardware (threaded holes, thumb screws, #2-56 screw) HT High Temp. Epoxy BS1 Standard Straight Backshell BS3 90/RA Oval BSY Custom Backshell	EJS End Jack Screw RH RoHS Compliant BS2 45 Oval BS4 2 Piece BS CS Customer Supplied Material
10 Shield / Jacket	D Slip-on Braid E Machine Braid F Flexo Braid J Nomex Braid ST Shrink Tube	
11 Mod Codes	M10 Custom Keying M53 Space Grade Nano-D, SPT2	M50 Space Grade Nano-D, SPT1
12 Special Instructions	YYY Describe anything that is not covered in standard options	