



© - TE Connectivity. All Rights Reserved.
 Tooling Drawing NO.
 USB A: TR00662
 USB B: TR00664

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	D3	REVISED PER ECN-22-178360	100CT2022	AP	YX

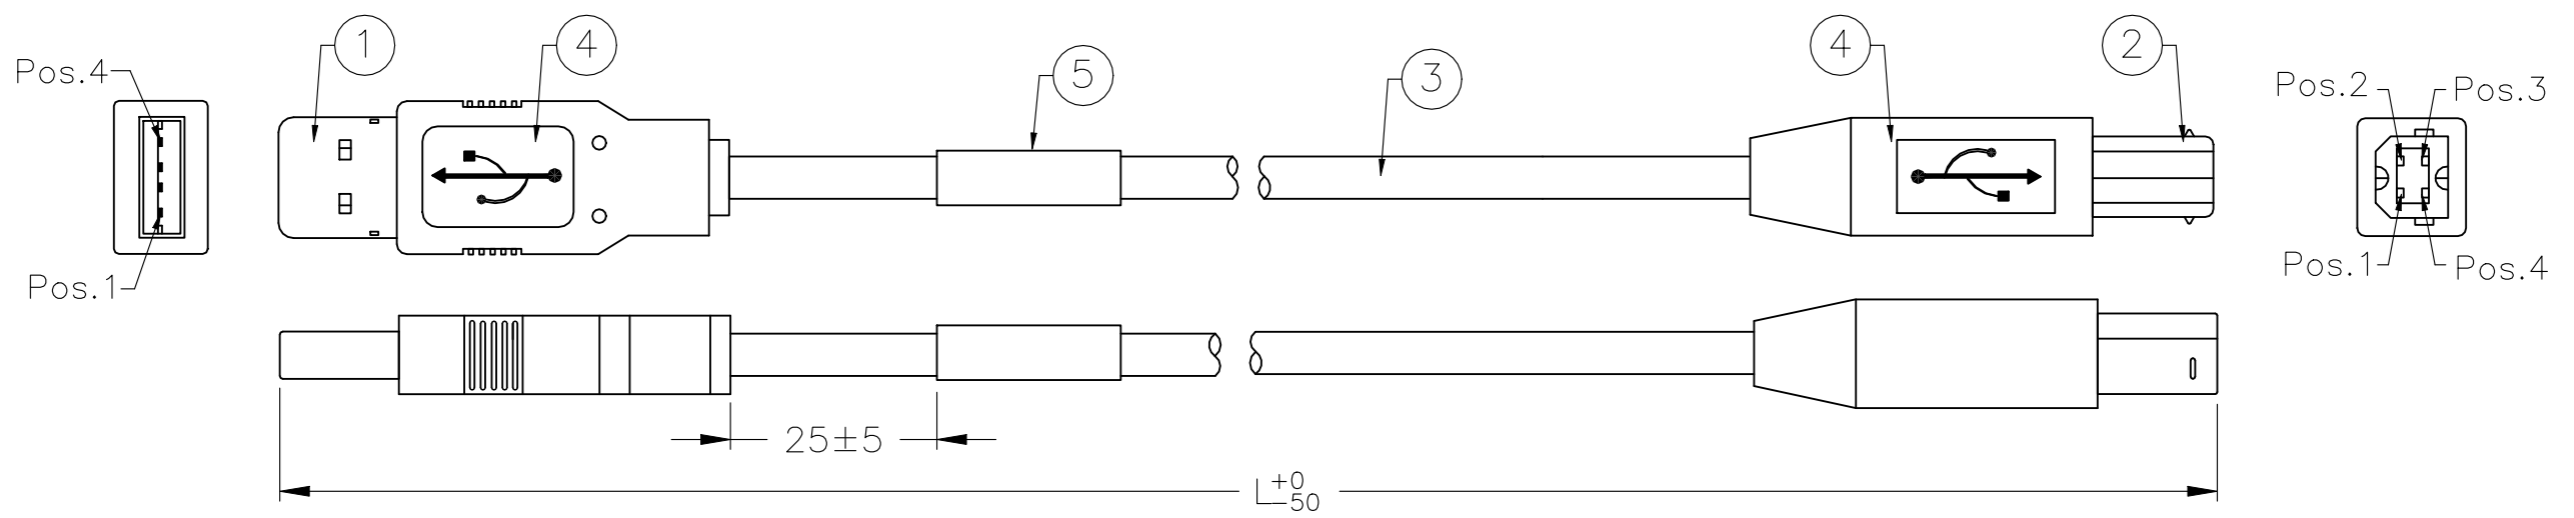

PIN ASSIGNMENT :

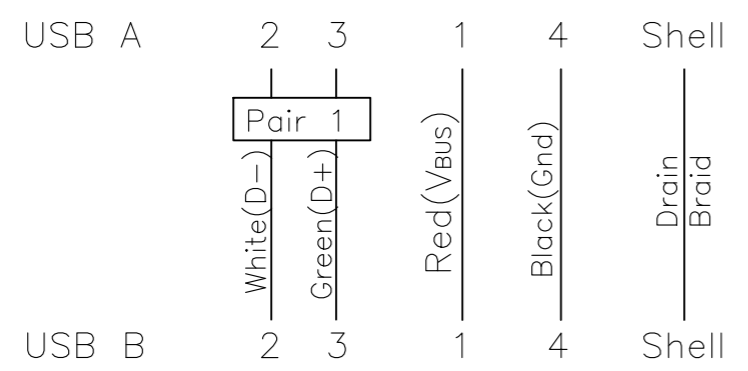

PART NO.	1487596-1	1487596-2	1487596-3	1487596-4
LENGTH(L)	2000	1500	1829	1000

QTY	DESCRIPTION	ITEM				
6	COPPER FOIL, W: 5MM	6				
5	LABEL, 25x35mm, White 25x13mm	5				
4	Overmold PVC, 40P, Color: Black(BK01)	4				
3	USB 2.0 Cable 28AWG*1P+24AWG*2C+Al/Mylar +Drain+Braid, Color: Black(BK01).	3				
2	USB 4Pin Connector Contacts: Gold 30U Plated, Shell: Nickel Plated, Housing UL94V-0 B Type.	2				
1	USB 4Pin Connector Contacts: Gold 30U Plated, Shell: Nickel Plated, Housing UL94V-0 A Type.	1				
-4	-3	-2	-1	U/M	DESCRIPTION	ITEM

- NOTES:
- TESTED FOR CONTINUITY, SHORTS AND OPENS, HI-POT 630V FOR 10MS.
 - CABLE ASSEMBLY MEETS USB 2.0 STANDARDS.
 - EXPOSED CABLE BRAID IS NOT PERMISSIBLE BEYOND OVERMOLD.
 - THE FINAL CABLE ASSEMBLY MAXIMUM LENGTH NOT TO EXCEED 2700MM PER USB SPECIFICATIONS.
 - MEETS REQUIREMENTS OF EU DIRECTIVE 2002/95/EC

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN BOVEY LIU 25/FEB/02
 CHK -
 APVD F.D. McCORKEL 15/MAR/02
 PRODUCT SPEC -
 APPLICATION SPEC -
 WEIGHT -

STE TE Connectivity

NAME: CABLE ASSEMBLY, USB A TYPE TO USB B TYPE

SIZE: A3 CAGE CODE: 00779 DRAWING NO: C-1487596 RESTRICTED TO: -

CUSTOMER DRAWING SCALE: N.T.S SHEET: 1 OF 1 REV: D3