
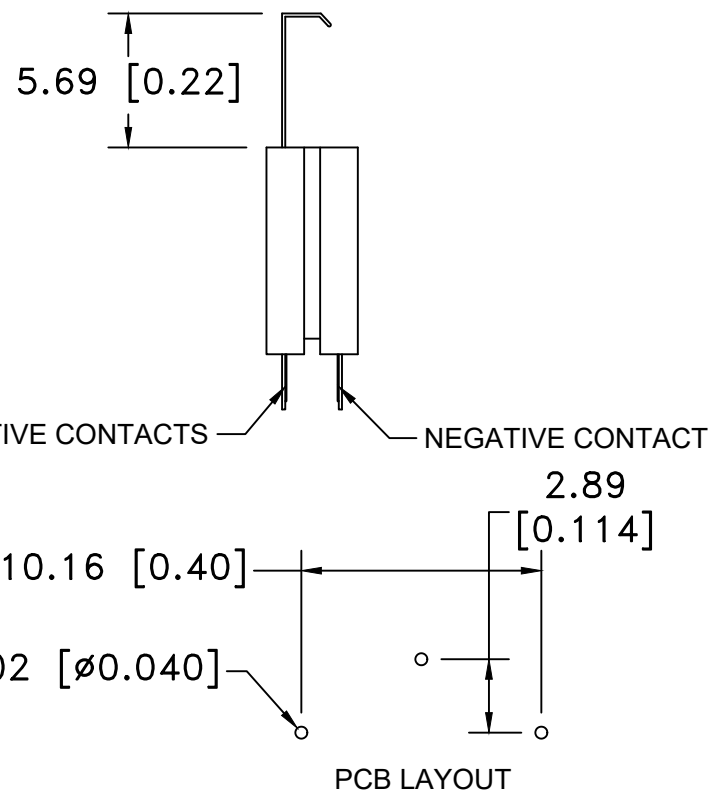
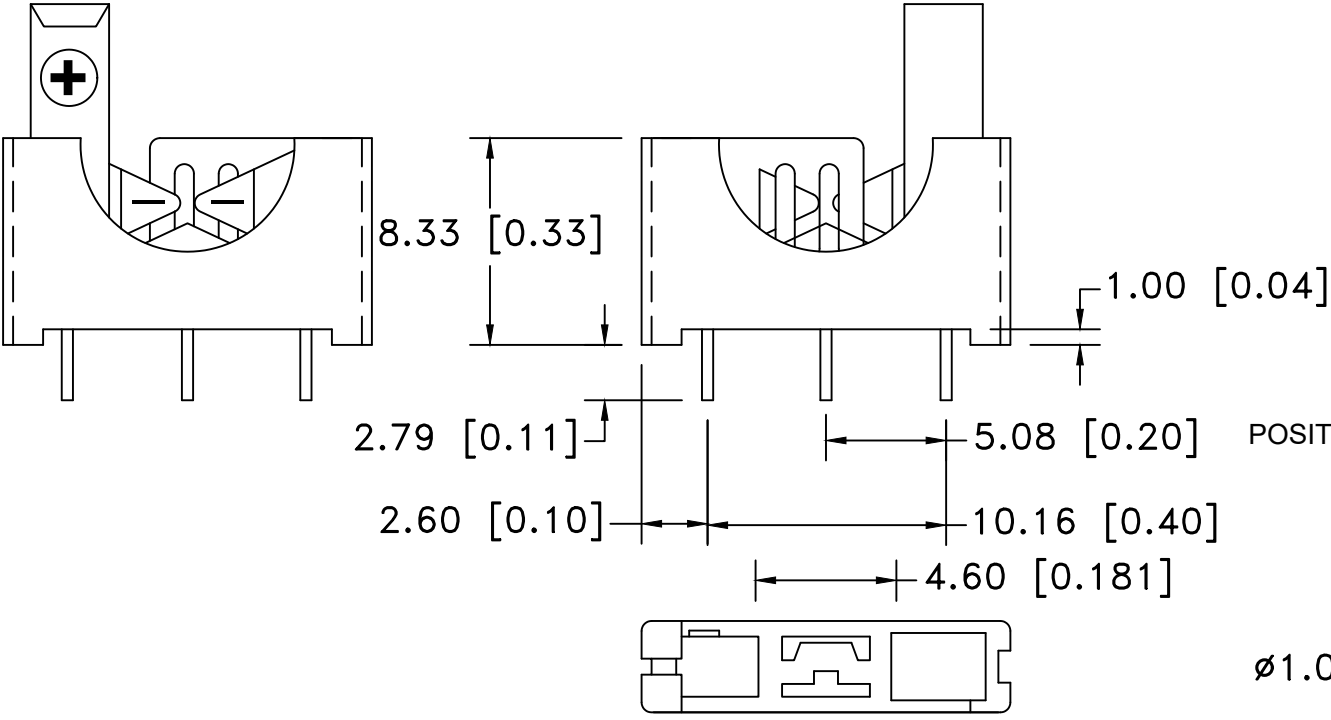



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
12/01/17	J	UPDATED SIDE VIEW	T.B.	B.S.	
10/31/19	K	ADDED WEIGHT OF THE PART	T.B.	B.S.	
09/23/20	L	ADDED FRONT VIEW	T.B.	B.S.	

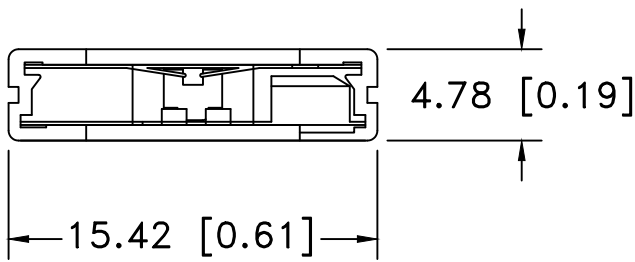

NOTES:  
MATERIAL: GLASS FILLED NYLON 66, UL94V-0  
COLOR BLACK, UL FILE NO. E245249  
CONTACTS: PHOSPHOR BRONZE, C5191, NICKEL PLATED  
ELECTRICAL :  
VOLTAGE: 250V AC  
CONTACT RESISTANCE: 30mΩ MAX  
INSULATION RESISTANCE: 1000mΩ AT DC 500V  
DIELECTRIC STRENGTH: AC 1000V PER MINUTE  
TEMPERATURE RANGE: -40°C TO +200°C  
APPROXIMATE WEIGHT: 0.68g  
ROHS COMPLIANT

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735		
	decimal ±.5 (.020)	Scale	Drawn By B.S. Approved By T.B.
Fractional ± .8 (.030)	Title BR/CR/DL 1225 VERTICAL BATTERY HOLDER, 3 PINS		
Angular ± 3°	Date 09/23/20	Drawing Number BS-1225-PC	